NOT MEASUREMENT SENSITIVE


MIL-B-3628/32H
30 July 1993
SUPERSEDING
MIL-B-3628/32G
13 September 1991

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT CREW MEMBER, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

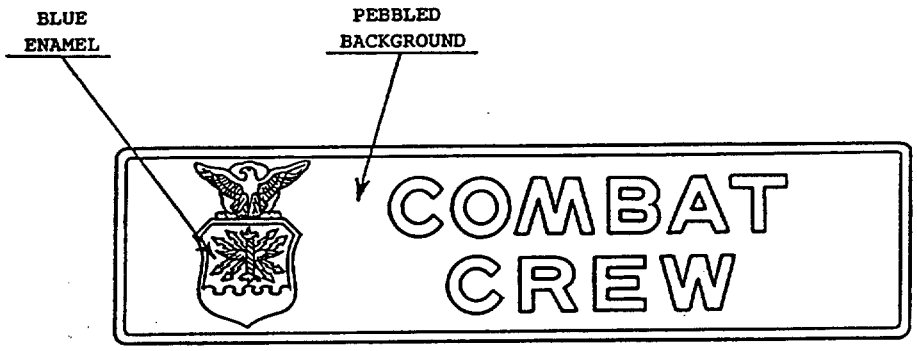

MATERIAL: Red Brass or Nickel Silver

FINISH: Soft Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT: 3/4 inch (1.91 cm) (REF)
WIDTH: 3 inches (7.62 cm) (REF)
THICKNESS (At Rim): 0.070 inch ± .005 inch (0.178 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be Blue and shall conform to the TIOH chip number 18 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of soft enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes; however, the epoxy need not be stoned.

4. The attaching device shall be prong and clutch type. Two prongs shall be located 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) from the top of the badge equidistant from each end and 2-1/2 inches ± 1/16 inch (6.35 cm ± 0.16 cm) apart.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82, 99
DLA - CT

User activities:
Air Force - 45

Preparing activities:
Army - IH

(Project No. 8455-0693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.