INCH-POUND


MIL-DTL-3628/32K
28 April 2014
SUPERSEDING
MIL-DTL-3628/32J
15 November 1996

DETAIL SPECIFICATION SHEET

# BADGE, QUALIFICATION, COMBAT CREW MEMBER, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

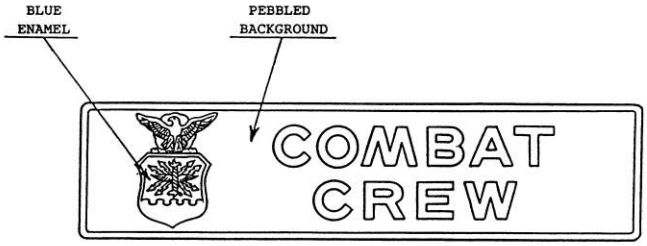


MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No C-752)

FINISH: Nickel Plated, Mirror –like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT: 3/4 inch (REF)
WIDTH: 3 inches (REF)
THICKNESS: (At rim): 0.070 inch ± 0.005 inch

EPOXY:
Epoxy resin (stoning epoxy) area shall be blue as indicated and shall match TIOH color chip number 18. Epoxy resin shall be smooth and flush with the dike lines; however, the epoxy need not be stoned.

ATTACHING DEVICE:
1: Attaching device shall be two prongs and clutches.

2: Two prongs shall be located 1/4 inch ± 1/64 inch from the top of the badge equidistant from each end and 2-1/2 inches ± 1/16 inch apart.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2014-098)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:58Z
Check the source to verify that this is the current version before use.