INCH-POUND


MIL-DTL-3628/34M
4 December 2015
SUPERSEDING
MIL-DTL-3628/34L
16 April 2014

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, NUCLEAR REACTOR OPERATOR, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

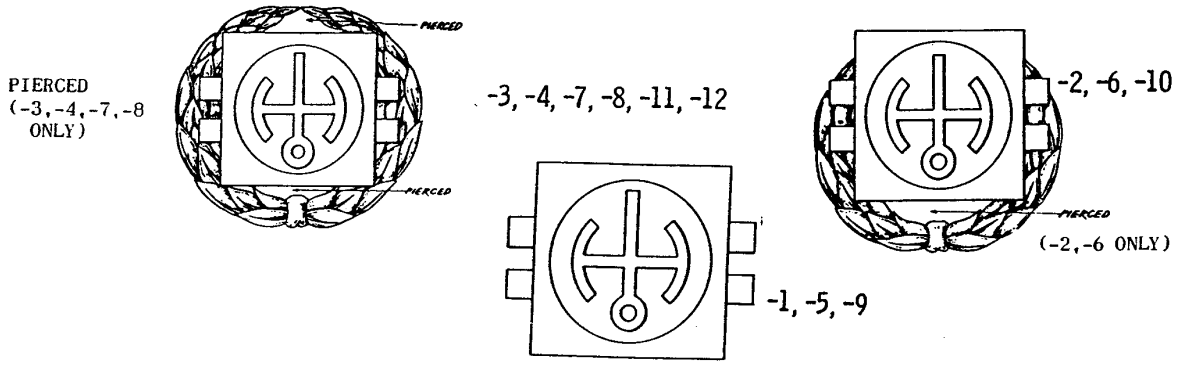

DASH NO.
-1: Nuclear Reactor Operator, Basic
-2: Nuclear Reactor Operator, 2nd Class
-3: Nuclear Reactor Operator, 1st Class
-4: Nuclear Reactor Operator, Shift Supervisor
-5: Nuclear Reactor Operator, Basic, Subdued
-6: Nuclear Reactor Operator, 2nd Class, Subdued
-7: Nuclear Reactor Operator, 1st Class, Subdued
-8: Nuclear Reactor Operator, Shift Supervisor, Subdued
-9: Nuclear Reactor Operator, Basic, Dress Miniature
-10: Nuclear Reactor Operator, 2nd Class, Dress Miniature
-11: Nuclear Reactor Operator, 1st Class, Dress Miniature
-12: Nuclear Reactor Operator, Shift Supervisor, Dress Miniature

MATERIAL:
-1, -2, -3, -9, -10, -11: Red Brass 85/15 (UNS Alloy No.C-230) or Nickel Silver 65/18 (UNS Alloy No.C-752) Zinc Aluminum.
-4, -5, -6, -7, -8, -12: Red Brass 85/15 (UNS Alloy No.C-230)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:59Z
Check the source to verify that this is the current version before use.

FINISH:

-1, -2, -3, -9, -10, and -11: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-4, and -12: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

-5, -6, and -7: Dull, Flat Black Enamel Finish and shall match TIOH Metal Finish Chip Number 21.

-8: Dull, Flat Brown Enamel Finish and shall match TIOH Metal Finish Chip Number 22.

DIMENSIONS:

HEIGHT (Overall):
- -1, -5: 29/32 inch (REF)
- -2, -3, -4, -6, -7, -8: 1 inch (REF)
- -9: 19/32 inch (REF)
- -10, -11, -12: 11/16 inch (REF)

WIDTH (Overall):
- -1 thru -8: 1-1/8 inches (REF)
- -9 thru -12: 3/4 inch (REF)

THICKNESS (At center of Emblem):
- -1, -5: 0.090 inch $\pm$ 0.005 inch
- -2, -3, -4, -6, -7, -8: 0.100 inch $\pm$ 0.005 inch
- -9: 0.075 inch $\pm$ 0.005 inch
- -10, -11, -12: 0.085 inch $\pm$ 0.005 inch

ATTACHING DEVICE AND PIERCING:

1. The attaching device shall be prong and wing type clutch.

2. The prongs shall be located on the horizontal center line equidistant from each end and 3/4 inch $\pm$ 1/32 inch apart for -1 through -8, 5/8 inch $\pm$ 1/32 inch apart for -10, -11, and -12 and 1/2 inch $\pm$ 1/32 inch apart on centers for -9.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated for full size badges only.

3. Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil/ - Downloaded: 2026-10-16T18:59Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-115)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil/ - Downloaded: 2026-10-16T18:59Z
Check the source to verify that this is the current version before use.