MIL-B-3628 / 36B
31 October 1969


SUPERSEDING
MIL-B-3628/36A
30 June 1967

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, MARINE CORPS

This specification is mandatory for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.



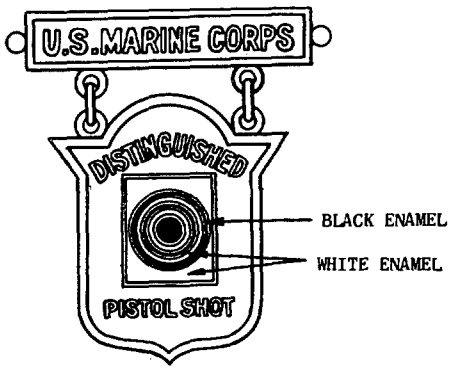

MATERIAL:
PENDANT: 14 KARAT GOLD
SUSPENSION BAR AND LINKS: .900 FINE GOLD (COINING GOLD)

DIMENSIONS (INCHES):
HEIGHT (OVERALL):
PENDANT: 1-17/64 (REF)
SUSPENSION BAR: 9/32 (REF)
WIDTH (OVERALL):
PENDANT: 1-1/16 (REF)
SUSPENSION BAR: 1-1/2 (REF)
THICKNESS (AT RIM):
PENDANT: .062 (REF)
SUSPENSION BAR: .062 ± .005

WEIGHT (ASSEMBLED): 357 GRAINS (MIN)

FINISH:
PENDANT:
OBVERSE: ENAMELED, SMUDGED, HIGHLIGHTS POLISHED
REVERSE: MIRROR-LIKE POLISHED
SUSPENSION BAR:
OBVERSE: SMUDGED, HIGHLIGHTS POLISHED
REVERSE: MIRROR-LIKE POLISHED

NOTES:

1. PENDANT THICKNESS IS GIVEN FOR INFORMATION PURPOSES ONLY. ASSEMBLED WEIGHT GOVERNS.

2. LINKS SHALL BE 7/32 ± 1/64 INCH IN LENGTH BY 5/32 ± 1/64 INCH IN WIDTH AND SHALL BE FABRICATED FROM .044 ± .002 INCH IN DIAMETER WIRE.

3. THE LUGS SHALL BE FABRICATED FROM .044 ± .002 INCH DIAMETER WIRE AND SHALL BE SOLDERED TO THE PENDANT AND SUSPENSION BAR 3/4 ± 1/64 INCH ON CENTERS. THE LUGS SHALL HAVE AN OUTSIDE DIAMETER OF 5/16 ± 1/64 INCH.

4. THE ATTACHING DEVICE SHALL BE THE PRONG AND CATCH TYPE. THE PRONGS SHALL BE CENTERED ON THE BACK OF THE SUSPENSION BAR EQUIDISTANT FROM THE ENDS AND 1-1/16 ± 1/32 INCH ON CENTERS.

5. ENAMELED AREAS SHALL BE AS INDICATED. THE ENAMEL SHALL MATCH THE ENAMEL ON THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIP NUMBERS LISTED BELOW:

Color	Chip No.
WHITE	28
BLACK	26

CUSTODIAN:
NAVY - PE
REVIEW ACTIVITIES:
NAVY - PE, MC
OTHER - DP
USER ACTIVITY:
NAVY - MC

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY, UNITED STATES ARMY

Project No. 8455-0131

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.