NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/36E
15 November 1996
SUPERSEDING
MIL-B-3628/36D
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

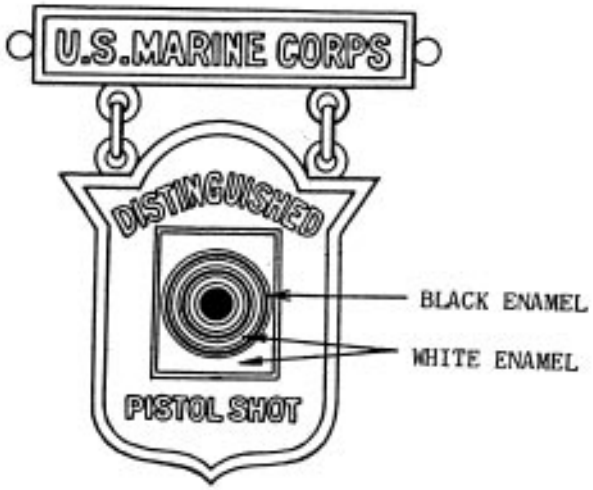

MATERIAL:
PENDANT: Gilding Metal
SUSPENSION BAR: Red Brass or Gilding Metal

FINISH:
PENDANT:
OBVERSE: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.

SUSPENSION BAR:
OBVERSE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
HEIGHT (Overall):
PENDANT: 1-17/64 inches (2.21 cm) (REF)
SUSPENSION BAR: 9/32 inch (0.79 cm) (REF)
WIDTH (Overall):
PENDANT: 1-1/16 inches (2.70 cm) (REF)
SUSPENSION BAR: 1-1/2 inches (3.81 cm) (REF)
THICKNESS (At Rim):
PENDANT: 0.062 inch ± .005 inch (0.157 cm ± 0.012 cm)
SUSPENSION BAR: 0.062 inch ± .005 inch (0.157 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.

4. Lugs are integral.

5. Links shall be 7/32 ± 1/64 inch (0.56 cm ± 0.04 cm) in length by 5/32 inch ± 1/64 inch (0.40 cm ± 0.04 cm) in width and shall be fabricated from 0.044 inch ± 0.005 inch (0.114 cm ± 0.012 cm) diameter wire.

6. The attaching device shall be prong and flat ball type clutch. The prongs and clutch shall be located on the horizontal center line on the back of the suspension bar equidistant from each end and 1-1/16 inch ± 1/32 inch (2.70 cm ± 0.08 cm) apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU
Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.