INCH-POUND


MIL-DTL-3628/36F
08 January 2013
SUPERSEDING
MIL-DTL-3628/36E
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, USMC

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

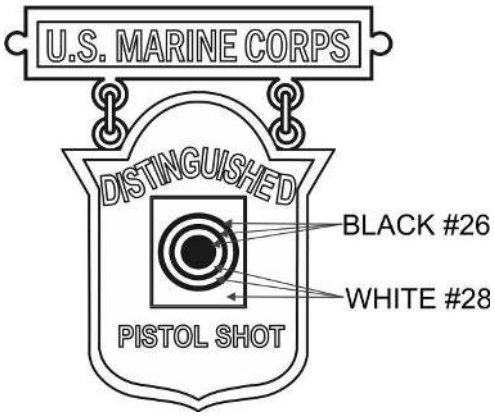

MATERIAL:
PENDANT: Gilding Metal
SUSPENSION BAR: Red Brass 85/15 (UNS Alloy No. C-230) or Gilding Metal

FINISH:
PENDANT:
OBVERSE: Hard Epoxy, 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

REVERSE: 24K Gold Plated, Mirror-Like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.

SUSPENSION BAR:
OBVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

REVERSE: 24K Gold Plated, Mirror-Like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:

HEIGHT (Overall):
PENDANT: 1-17/64 inches (REF)
SUSPENSION BAR: 9/32 inch (REF)
WIDTH (Overall):
PENDANT: 1-1/16 inches (REF)
SUSPENSION BAR: 1-1/2 inches (REF)
THICKNESS: (At rim):
PENDANT: 0.062 inch ± 0.010 inch
SUSPENSION BAR: 0.062 inch ± 0.010 inch

EPOXY: Hard epoxy resin shall be applied as indicated below, and shall match TIOH Hard Enamel Color Chip Number listed:

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Black #26	See Picture
White #28	See Picture

ATTACHING DEVICE AND LUGS:
1. Links shall be 13/64 inch ± 1/64 inch in width and 1/4 inch ± 1/64 inch in length and shall be fabricated from 0.044 inch ± 0.005 inch diameter wire.

2. The attaching device shall be prong and Flat ball clutch type.

3. The prongs and clutch shall be located on the horizontal center line on the back of the suspension bar equidistant from each end and 1- 1/4 inch ± 1/32 inch apart.

4. Lugs are integral

NOTES:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2013-046)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.