NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/36H
16 November 2022
SUPERSEDING
MIL-DTL-3628/36G
8 January 2018

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, USMC

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

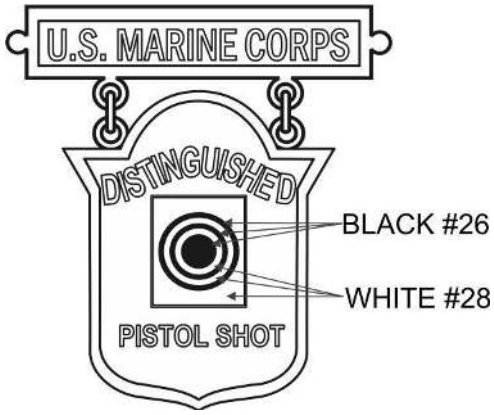

MATERIAL:
PENDANT: Gilding Metal 95/5 (UNS Alloy No. C-210)
SUSPENSION BAR: Red Brass 85/15 (UNS Alloy No. C-230) or Gilding Metal 95/5 (UNS Alloy No. C-230)

FINISH:
PENDANT:
OBVERSE: Hard Epoxy, 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
REVERSE: 24K Gold Plated, Mirror-Like Polished and shall match TIOH Metal Finish Chip Number 6.

SUSPENSION BAR:
OBVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
REVERSE: 24K Gold Plated, Mirror-Like Polished and shall match TIOH Metal Finish Chip Number 6.
DIMENSIONS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.

HEIGHT:
PENDANT: 1-17/64 inches (REF)
SUSPENSION BAR: 9/32 inch (REF)
WIDTH:
PENDANT: 1-1/16 inches (REF)
SUSPENSION BAR: 1-1/2 inches (REF)
THICKNESS: (At rim):
PENDANT: 0.062 inch ± 0.010 inch
SUSPENSION BAR: 0.062 inch ± 0.010 inch

EPOXY: Hard epoxy resin shall be applied as indicated below, and shall match TIOH Hard Enamel Color Chip Number listed:

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Black #26	See Picture
White #28	See Picture

ATTACHING DEVICE AND LUGS:

1. Links shall be 13/64 inch ± 1/64 inch in width and 1/4 inch ± 1/64 inch in length and shall be fabricated from 0.044 inch ± 0.010 inch diameter wire.

2. The attaching device shall be prong and Flat ball clutch type.

3. The prongs and clutch shall be located on the horizontal center line on the back of the suspension bar equidistant from each end and 1- 1/4 inch ± 1/32 inch apart.

4. Lugs are integral

NOTES:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2023-037)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:00Z
Check the source to verify that this is the current version before use.