
MIL-S-15743/11(SH)
27 August 1984
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 500 VOLTS ALTERNATING CURRENT/250 VOLTS DIRECT CURRENT, 30 AMPERE, SYMBOL 2753 (DPST)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-15743(SH).

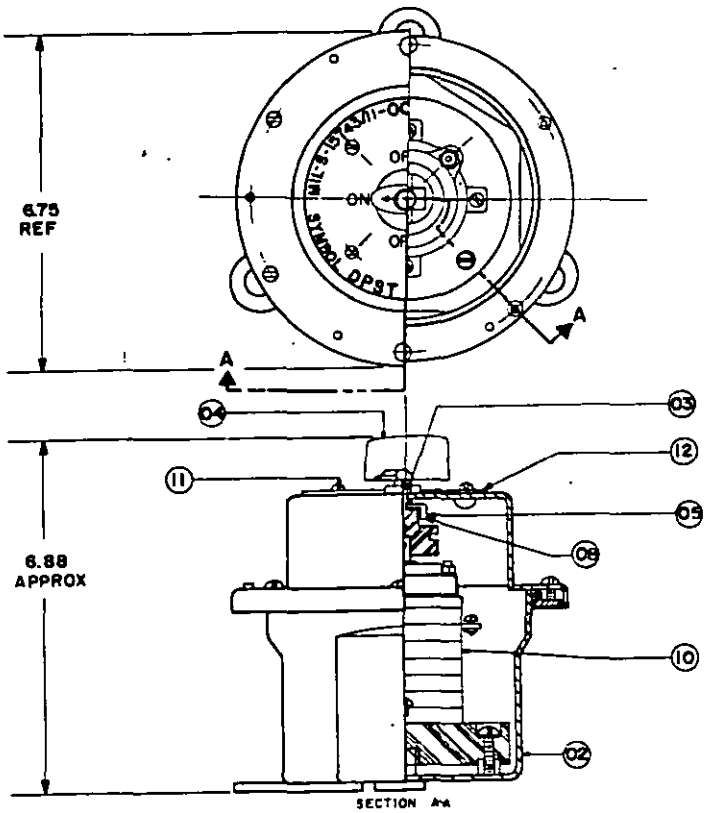


SH 131238


FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

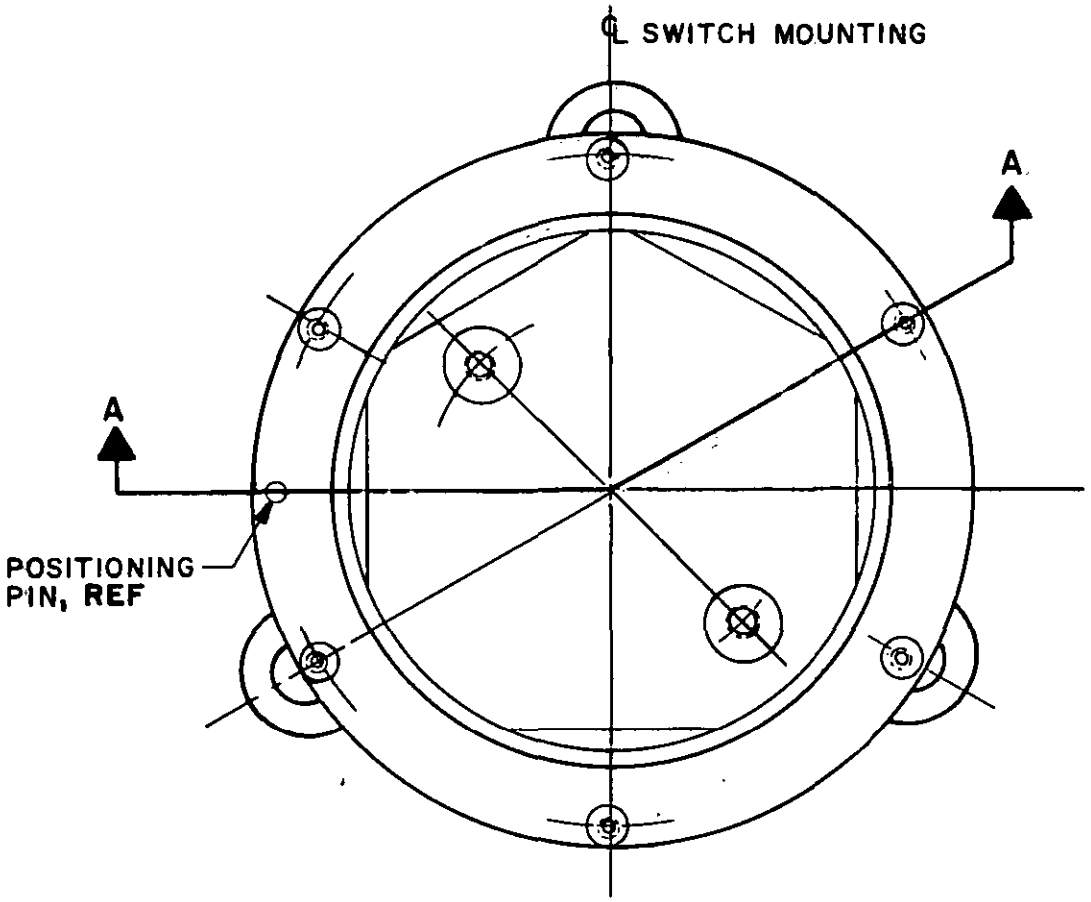

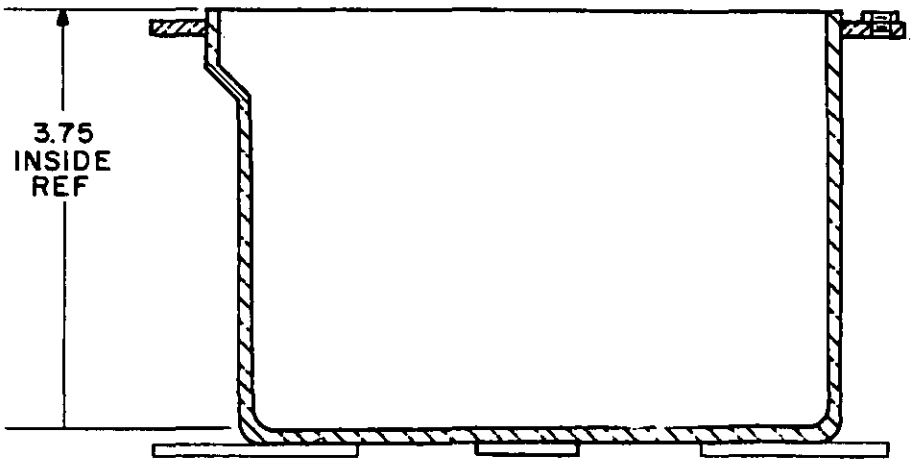


SH 131239

SECTION A-A

FIGURE 2. Box assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

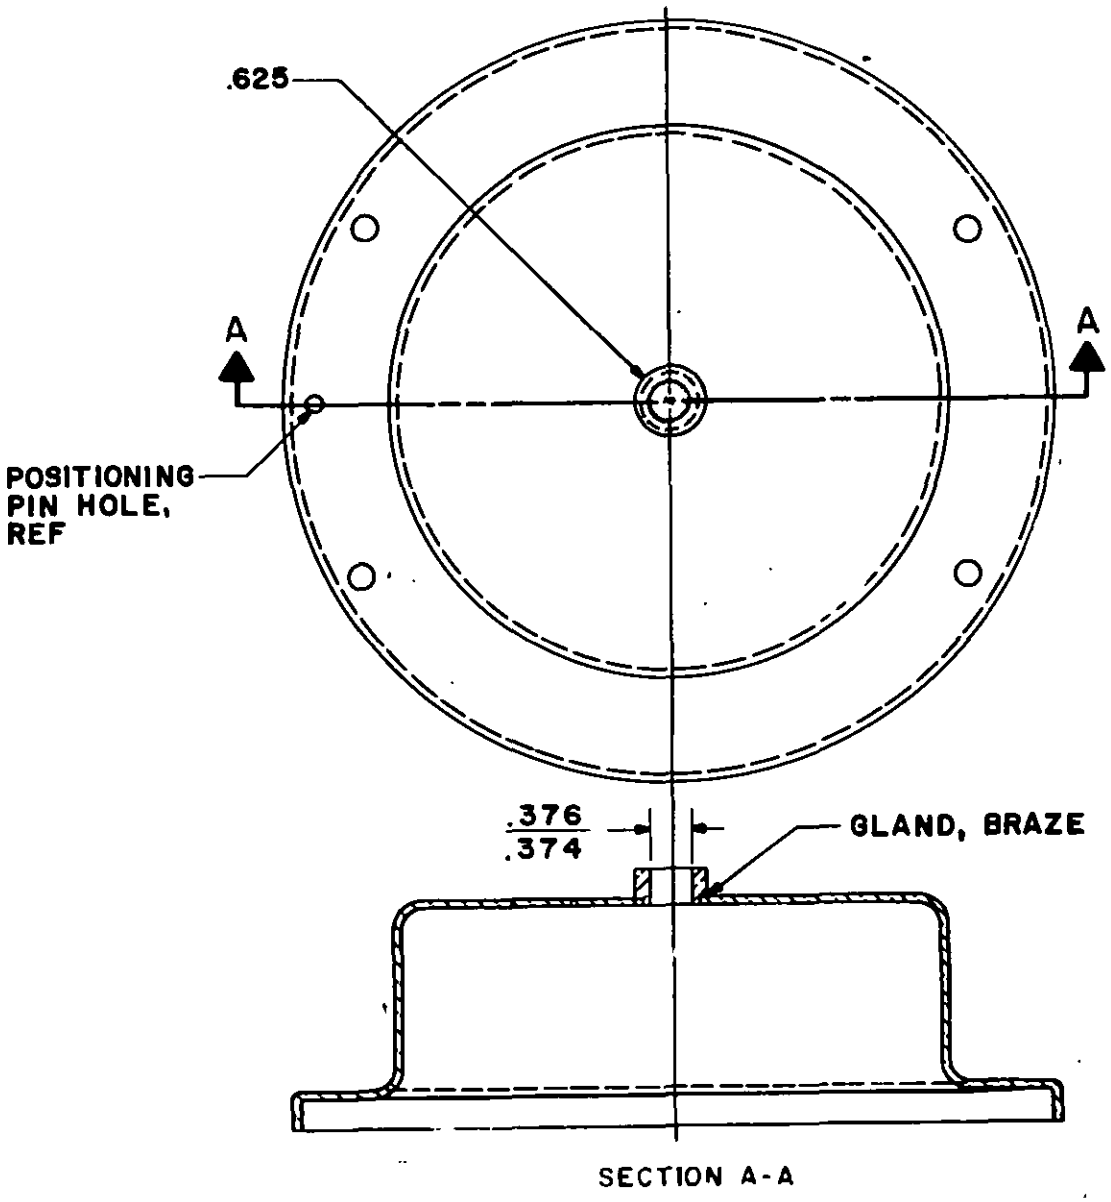

SH 131240

FIGURE 3. Cover assembly, (modified).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

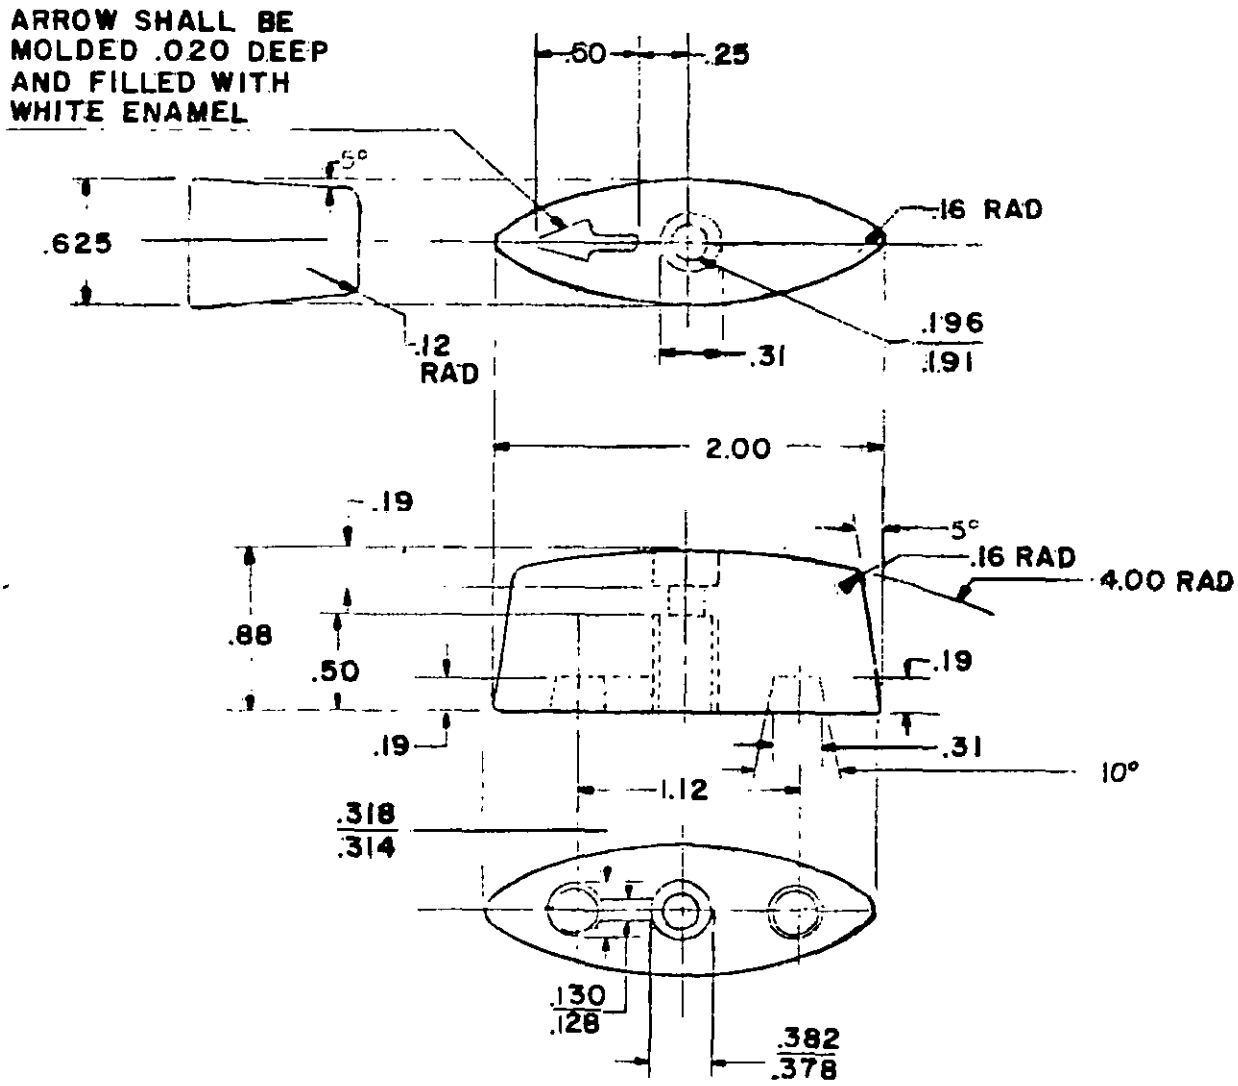

SH 131241


FIGURE 4. Handle. (04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

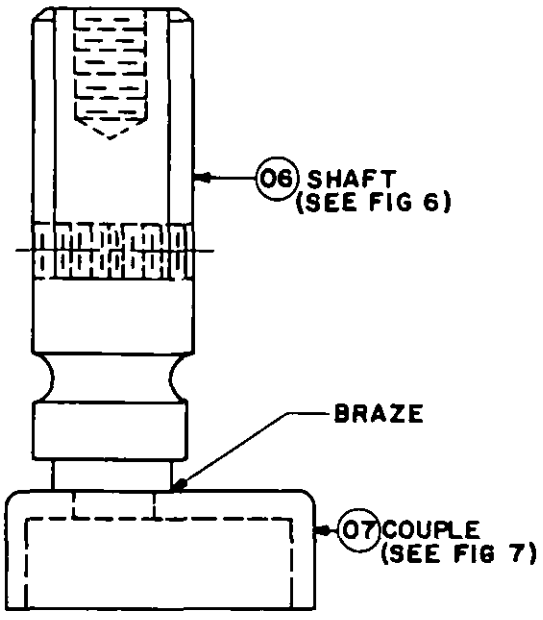


SH 131242

FIGURE 5. Shaft assembly. (05)

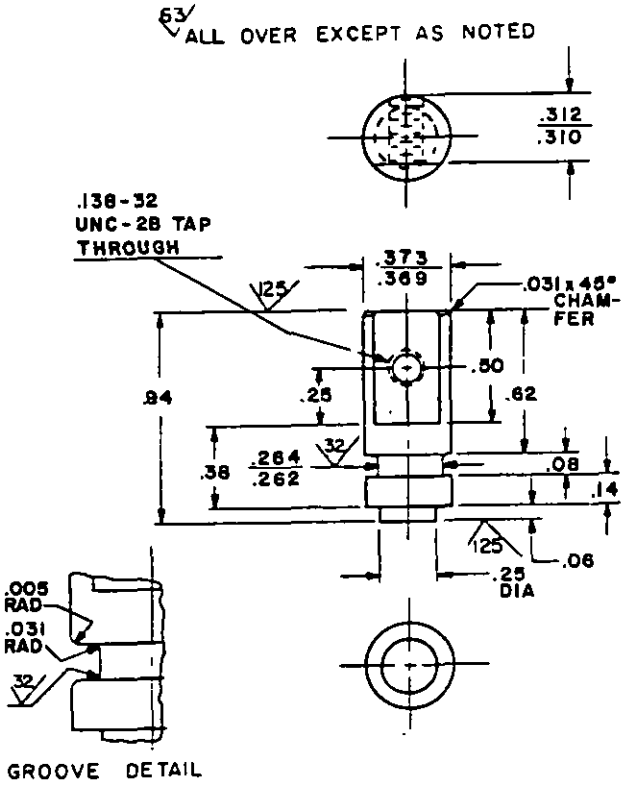

SH 131243


FIGURE 6. Shaft. (06)

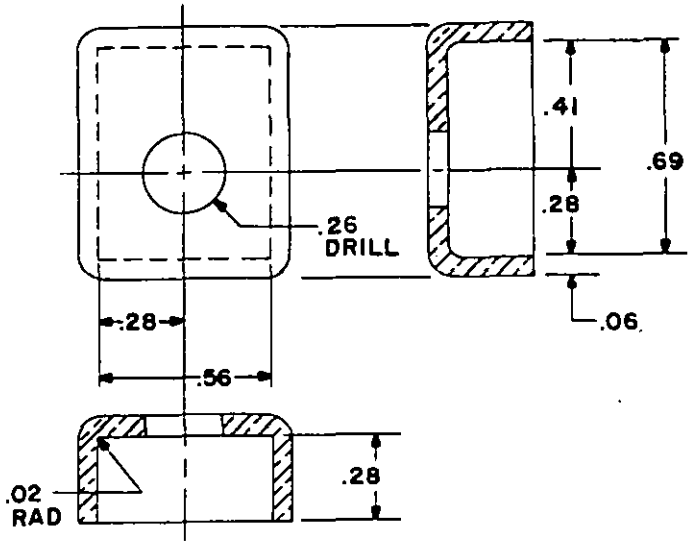

SH 131244


FIGURE 7. Coupler. (07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

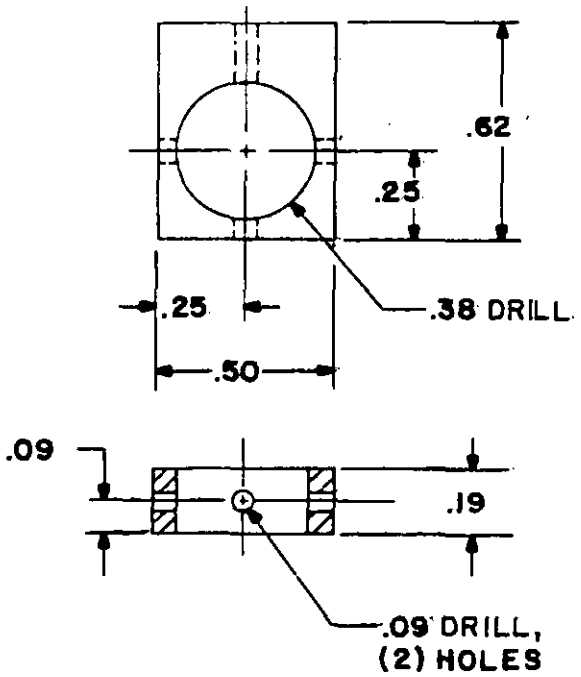

SH 131245


FIGURE 8. Coupler plate. (08)

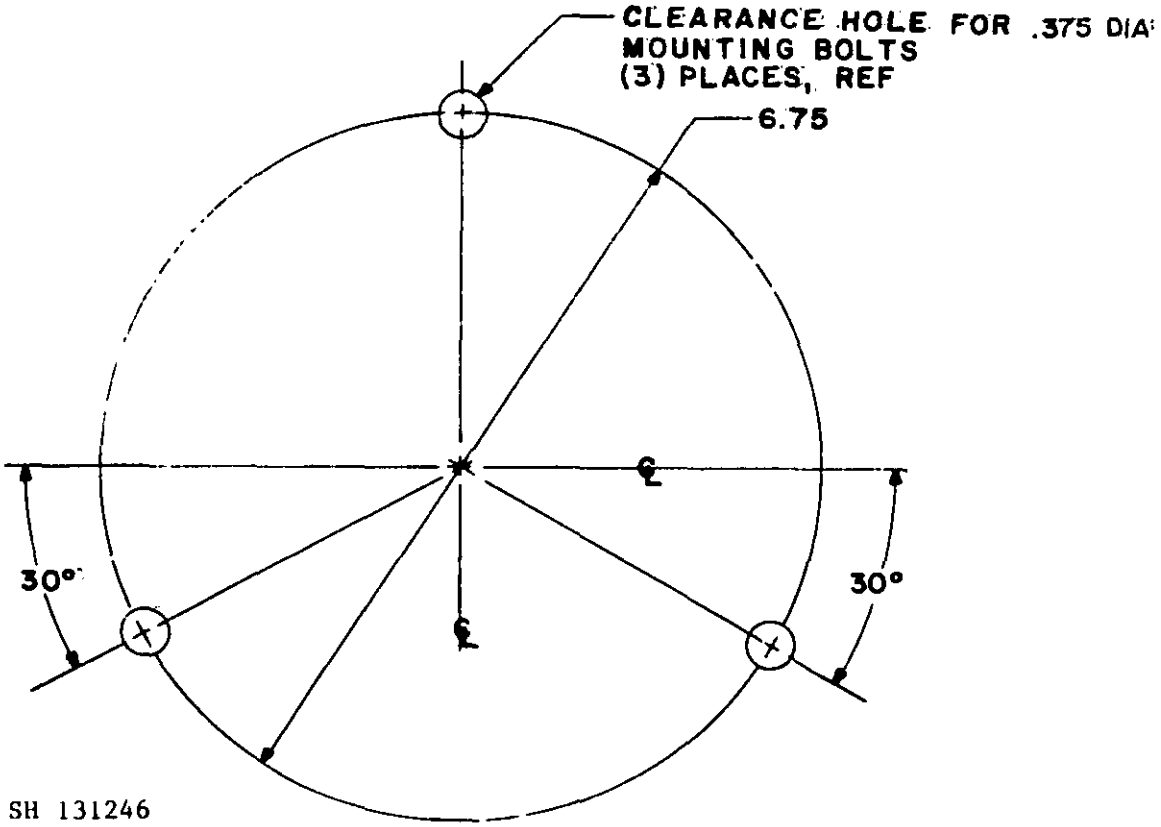

SH 131246


FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:59Z
Check the source to verify that this is the current version before use.

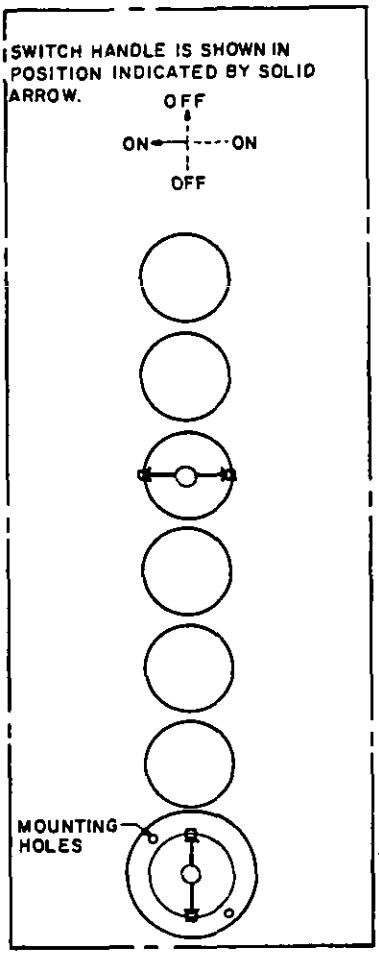

SH 131247

FIGURE 10. Wiring diagram. (09)

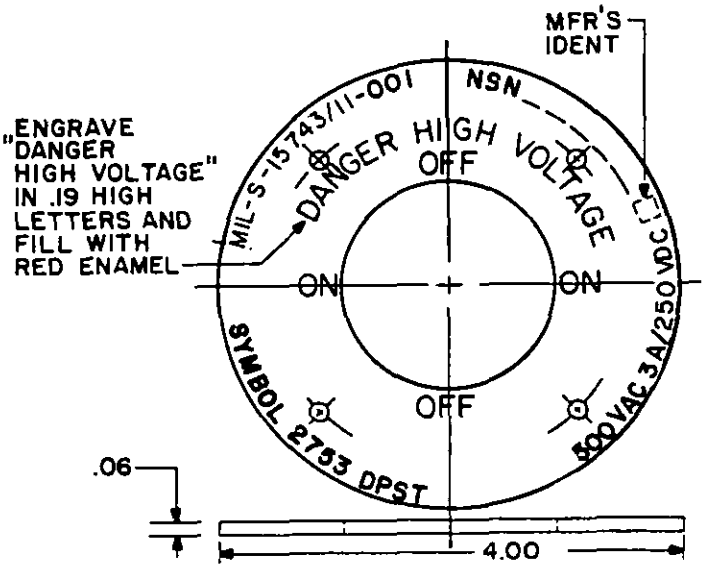

SH 131248

FIGURE 11. Identification plate. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 500 Va.c., 60 Hz, 250 Vd.c., 0-30 ampere.
Dimensions and configuration: See figures 1 through 9.
Wiring diagrams: See figure 9.
Mounting dimensions: See figure 8.
Degree of enclosure: Submersible (15 feet).
Weight: 6 pounds maximum.
Designation and marking: See figures 10 and 11.
Identification data shall be as shown on figure 11. Unless otherwise specified in the ordering data, switch action marking shall be as shown on figure 10.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/				
			Type	Unit	Sheet	Revision	Date
M15743/11-001	2753	DPST	3SR2A4-2	8	9	D	6/30/77

1/ NAVSEA Drawing 9000-S6202-74276, in part.

ORDERING DATA:

Acquisition documents should specify the following:
Switch action marking, if different (see requirements).

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/11-001	Material/specification	Remarks
01	Switch, enclosed (sym 2753)	-	-----	See figure 1
02	Enclosure	1	Brass, MIL-E-24142/5	M24142/5-003 Mod 2/
03	O-ring	1	MS28775-010	----
04	Handle	1	Plastic, black, type CFI-10 or CFI-5 of MIL-M-14	See figure 4
05	Shaft assembly	1	-----	See figure 5
06	Shaft	1	Ni-Cu alloy of QQ-N-281	See figure 6
07	Coupler	1	Brass, alloy 260 of QQ-B-613	See figure 7

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:59Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no. 1/	Description	Quantity M15743/11-001	Material/specification	Remarks
08	Coupler plate	1	CRES, class 304 or 316 of QQ-S-766	See figure 8
09	Wiring diagram	1	MIL-E-2036	See figure 10
10	Switch (type 3SR2A4A)	1	MIL-S-15291/7	M15291/7-003
11	Identification plate	1	Brass, QQ-B-613	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure cover (see figure 3).

Preparing activity:
Navy - SH
(Project 5930-N584-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.