
MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, WATERTIGHT SNAP ACTION, TRANSFER, WITH INDICATION, 125 VOLTS ALTERNATING CURRENT, 30 AMPERE, SYMBOL 849 (TPDT)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-15743(SH).

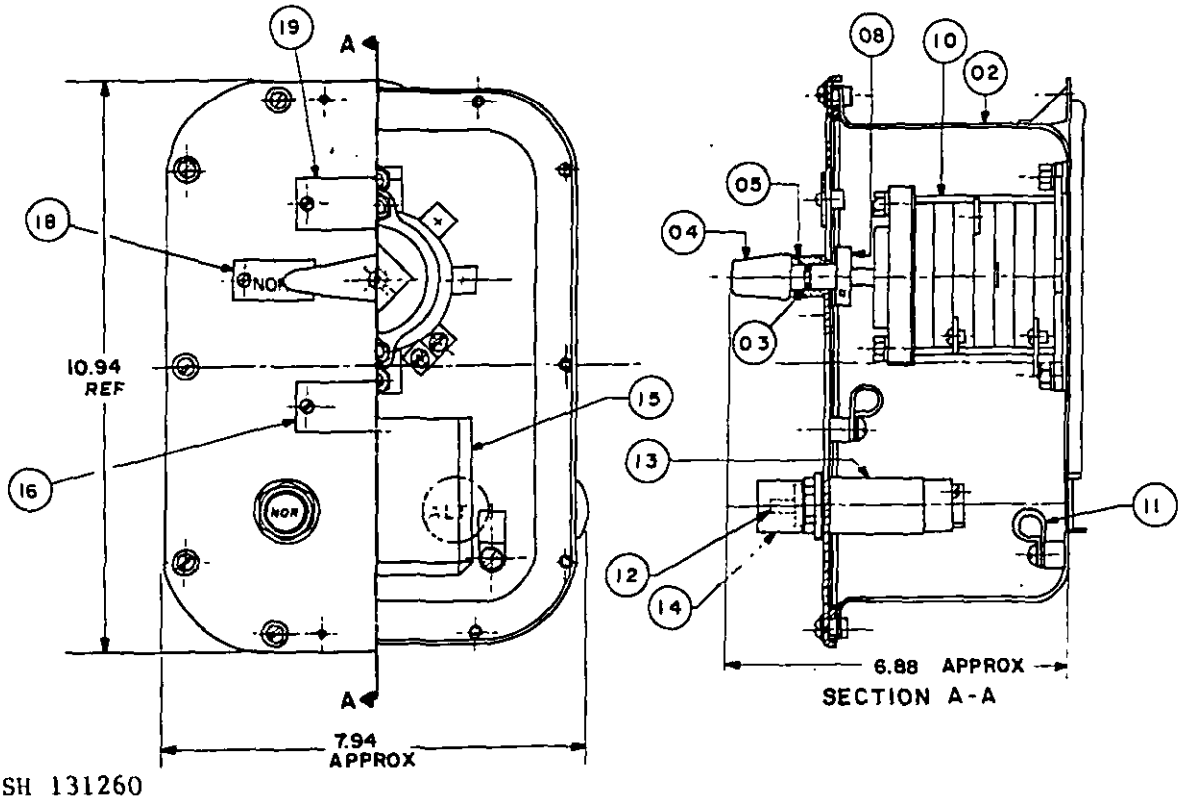

SH 131260

FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202640-18T07:59Z
Check the source to verify that this is the currentversion before use.


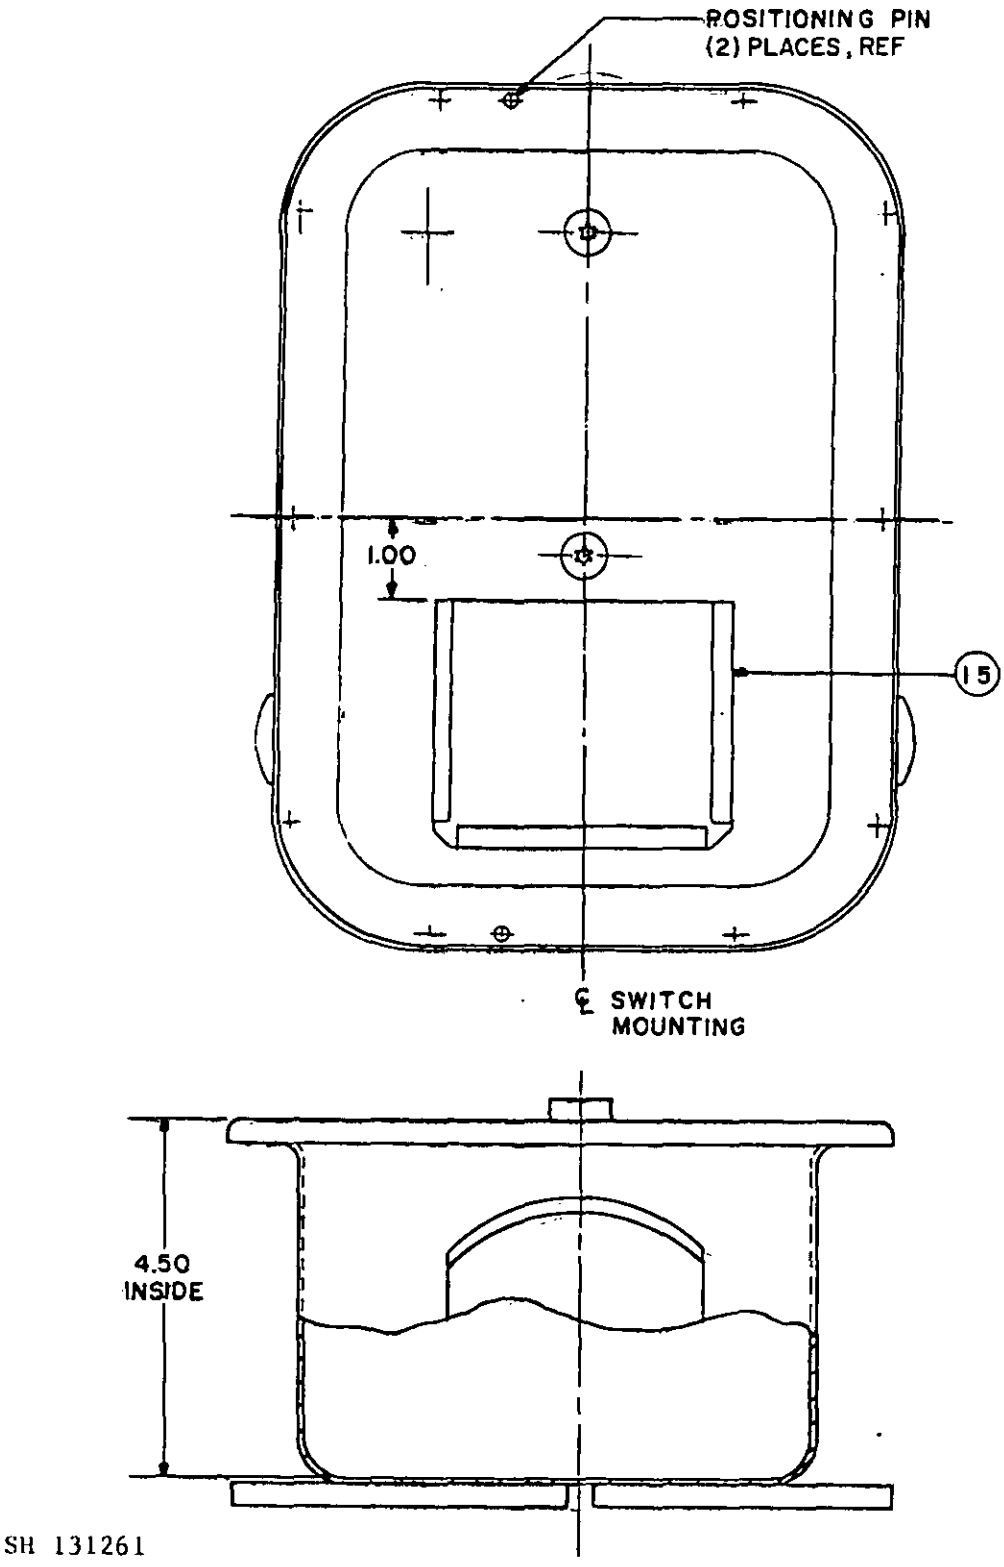


FIGURE 2. Box assembly (modified).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

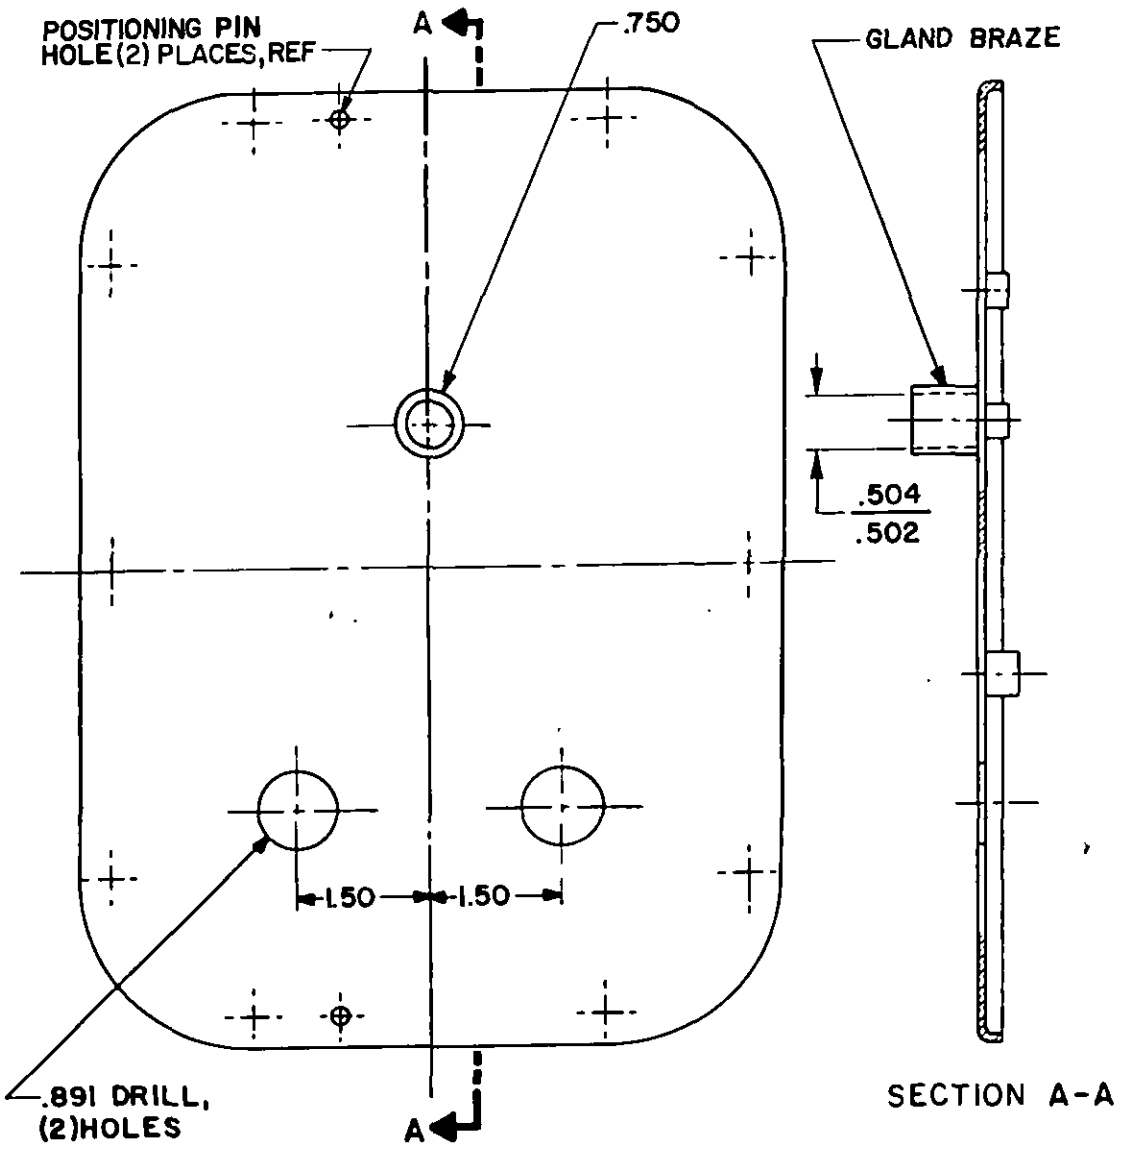

SH 131262

FIGURE 3. Cover assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

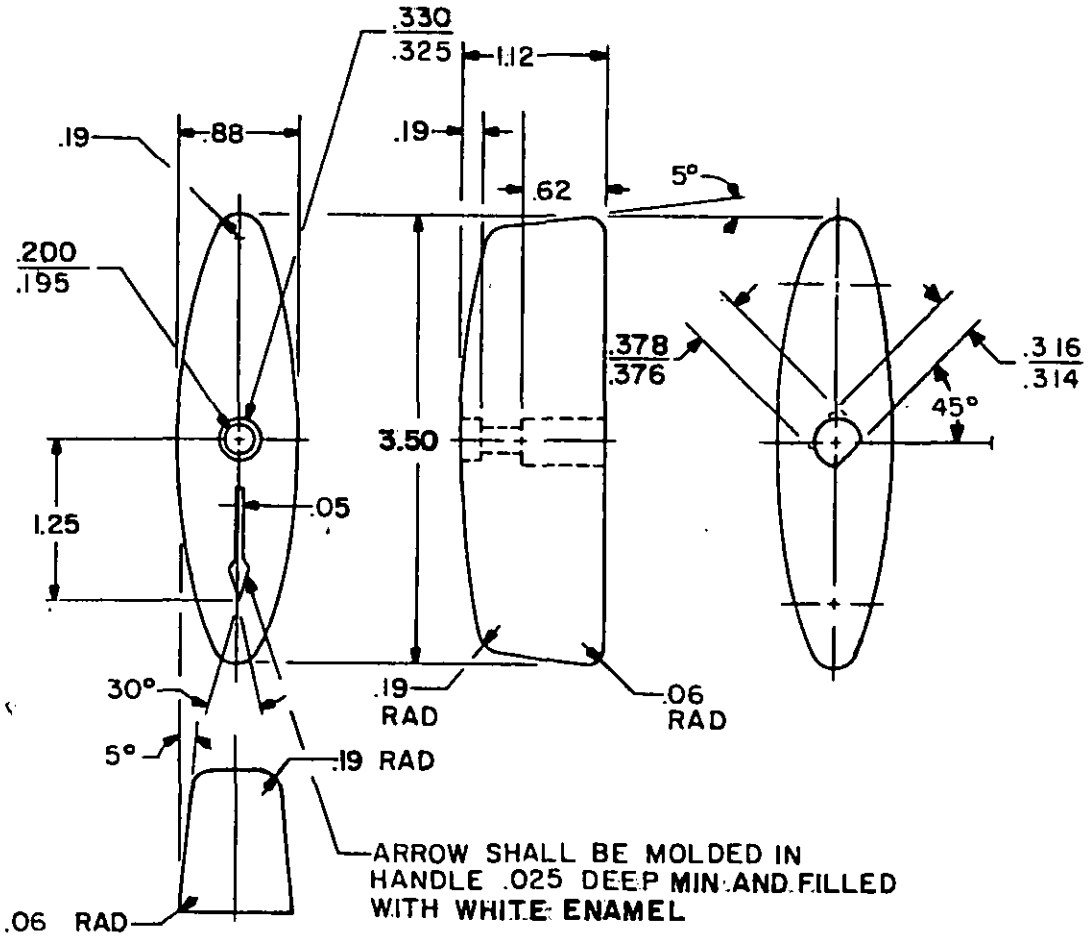

SH 131263


FIGURE 4. Handle. (04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

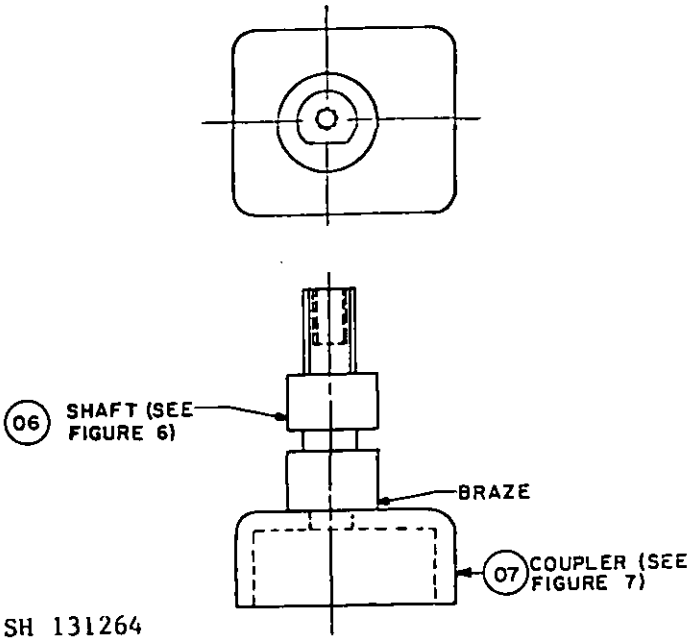


SH 131264

FIGURE 5. Shaft assembly. (05)

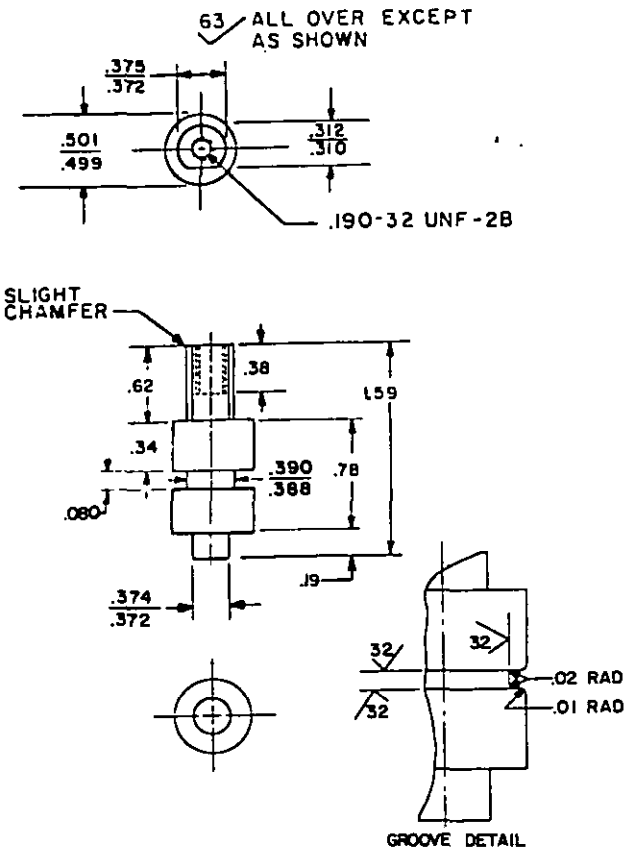

SH 131265


FIGURE 6. Shaft. (06)

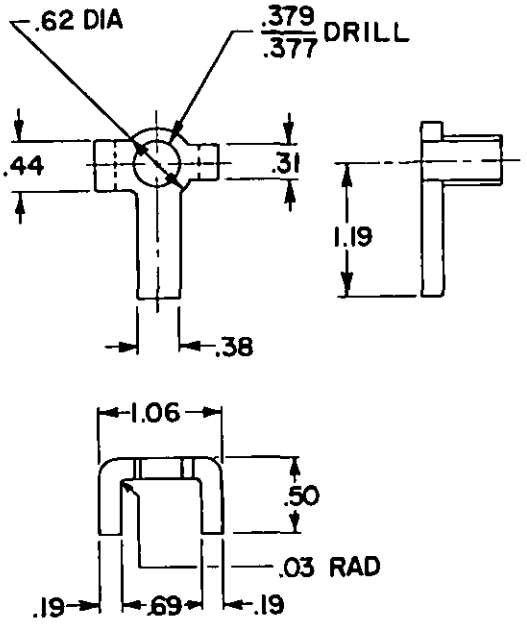

SH 131266


FIGURE 7. Coupler. (07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

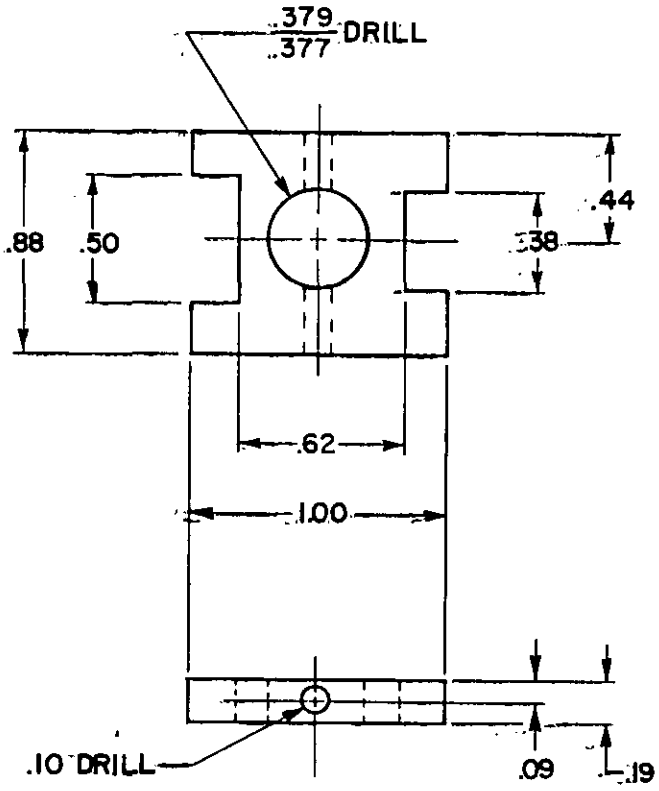

SH 131267


FIGURE 8. Coupler plate. (08)

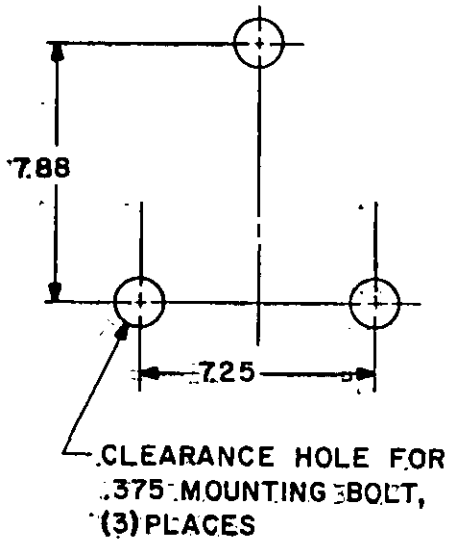

SH 131268

FIGURE 9. Mounting dimensions, ref.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

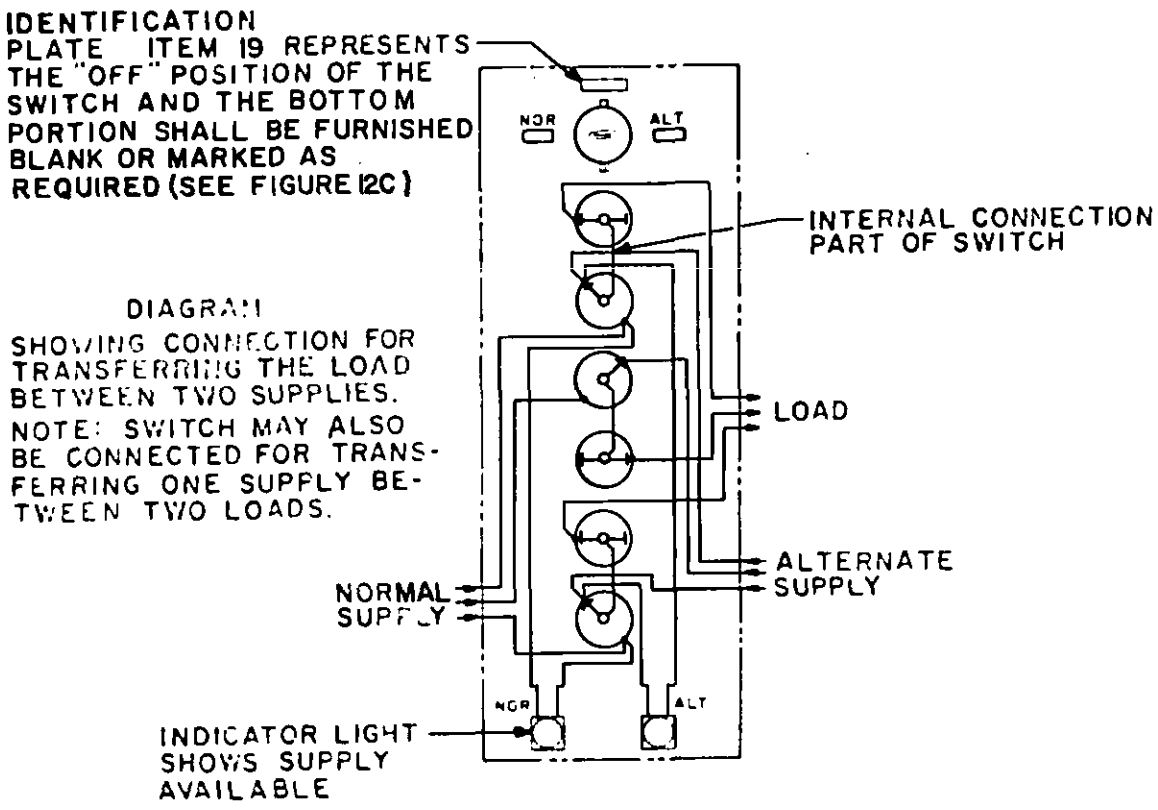

SH 131269


FIGURE 10. Wiring diagram. (09)

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:59Z
Check the source to verify that this is the current version before use.

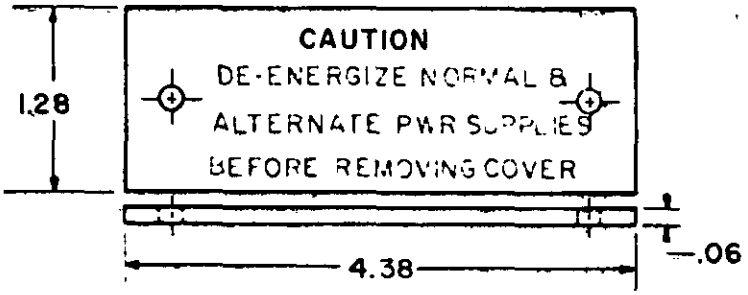


SH 131270


FIGURE 11. Caution plate. (16)

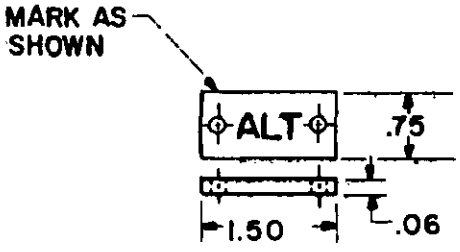

A. "ALT" information plate. (17)

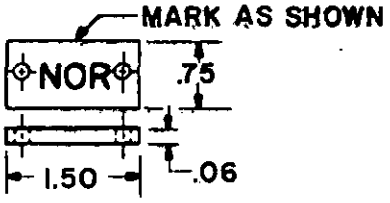

B. "NOR" information plate. (18)

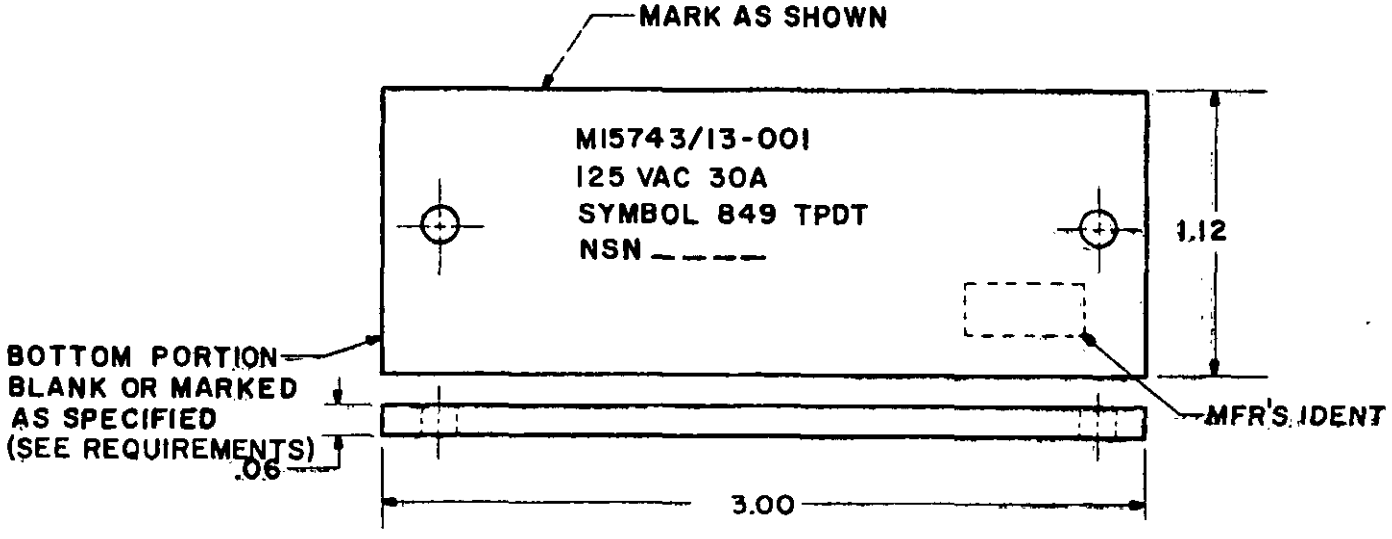

C. Identification plate. (19)

SH 131271

FIGURE 12. Identification and information plates.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-30 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Watertight.
Weight: 16 pounds maximum.
Designation and marking: See figures 11 and 12.
Identification data shall be as shown on figures 11 and 12. Unless otherwise specified in the ordering data, bottom portion of identification plate shall be blank as shown on figure 12.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/				
			Type	Unit	Sheet	Revision	Date
M15743/13-001	849	TPDT	3SR3B4-		1	A	3/4/64

1/ NAVSEA Drawing 815-1197224.

ORDERING DATA:

Acquisition documents should specify the following:
Additional identification plate marking, if required, (see requirements).

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/13-001	Material/specification	Remarks
01	Switch, enclosed (sym 849)	-		See figure 1
02	Enclosure	1	Brass, MIL-E-24142/3	M24143/2-001 Mod 2/
03	O-ring	1	MS28775-012	-----
04	Handle (type CFI-10)	1	Plastic, black, type CFI-10 of MIL-M-14	See figure 4
05	Shaft assembly	1	-----	See figure 5
06	Shaft	1	Ni-Cu alloy of QQ-N-281	See figure 6
07	Coupler	1	Brass, alloy of QQ-B-613	See figure 7

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:59Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no. 1/	Description	Quantity M15743/12-001	Material/specification	Remarks
08	Coupler plate	1	CRES, class 304 or 316 of QQ-S-766	See figure 8
09	Wiring diagram	1	MIL-E-2036	See figure 10
10	Switch (type 3SR3B4)	1	MIL-S-15291/7	M15291/7-009
11	Cable clamp	2	Nylon, coml	----
12	Lamp, incandescent	4	MS15612-3	Industry no. TS-159
13	Light, indicator	2	MIL-L-3661/65	Style LH 98/3
14	Target cap assy "ALT" and "NOR"	1 ea	Style LC38RNIM, MIL-L-3661/65	----
15	Wiring diagram holder	1	MIL-E-24142	See figure 2
16	Caution plate	1	Brass, QQ-B-613	See figure 11
17	Information plate "ALT"	1	Brass, QQ-B-613	See figure 12a
18	Information plate "NOR"	1	Brass, QQ-B-613	See figure 12b
19	Identification plate	1	Brass, QQ-B-613	See figure 12c

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure to add wiring diagram holder, (see figure 2).

Preparing activity:
Navy - SH
(Project 5930-N584-13)

Source: https://assist.dla.mil -- Downloaded: 20260-18T07:59Z
Check the source to verify that this is the current version before use.