INCH-POUND
MIL-S-15743/13A(SH)
22 November 1993
SUPERSEDING
MIL-S-15743/13(SH)
27 August 1984

MILITARY SPECIFICATION SHEET

# SWITCH, ROTARY, ENCLOSED, WATERTIGHT SNAP ACTION, TRANSFER, WITH INDICATION, 125 VOLTS ALTERNATING CURRENT, 30 AMPERE, SYMBOL 849 (TPDT)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15743.

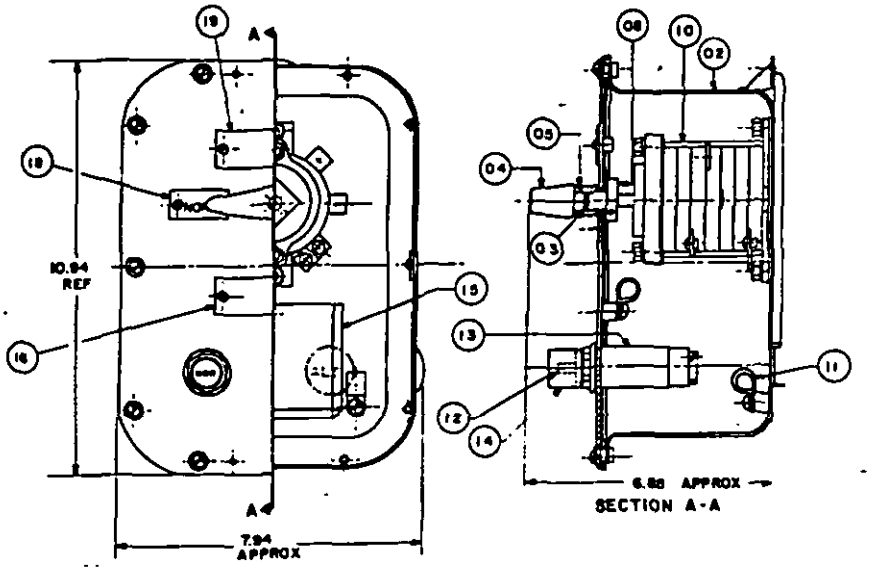



FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 202610-18T07:59Z
Check the source to verify that this is the current version before use.

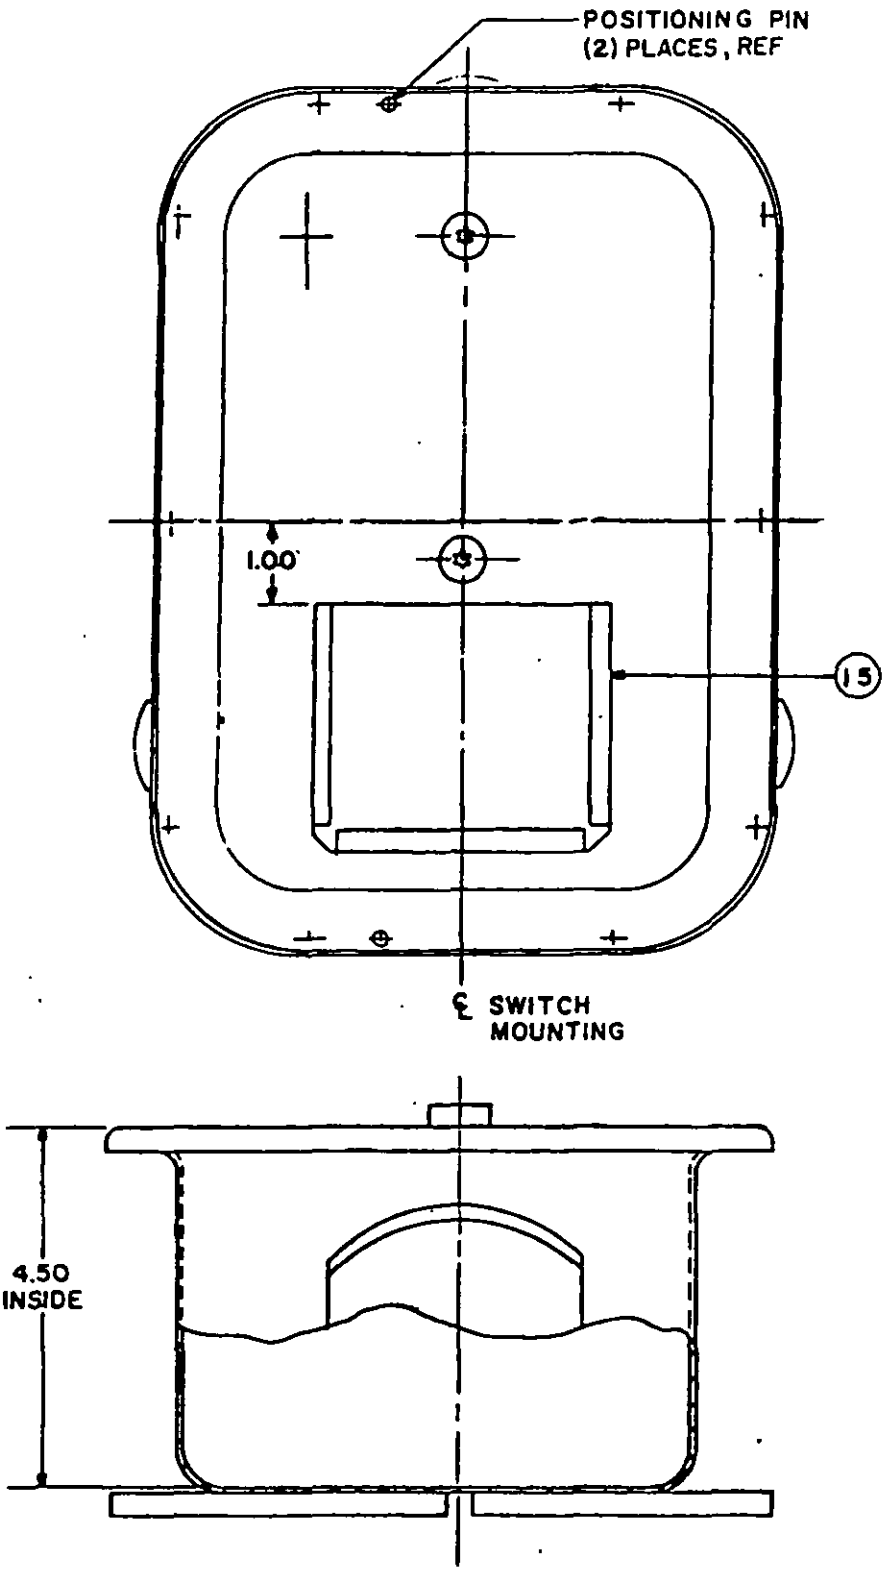



FIGURE 2. Box assembly (modified).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

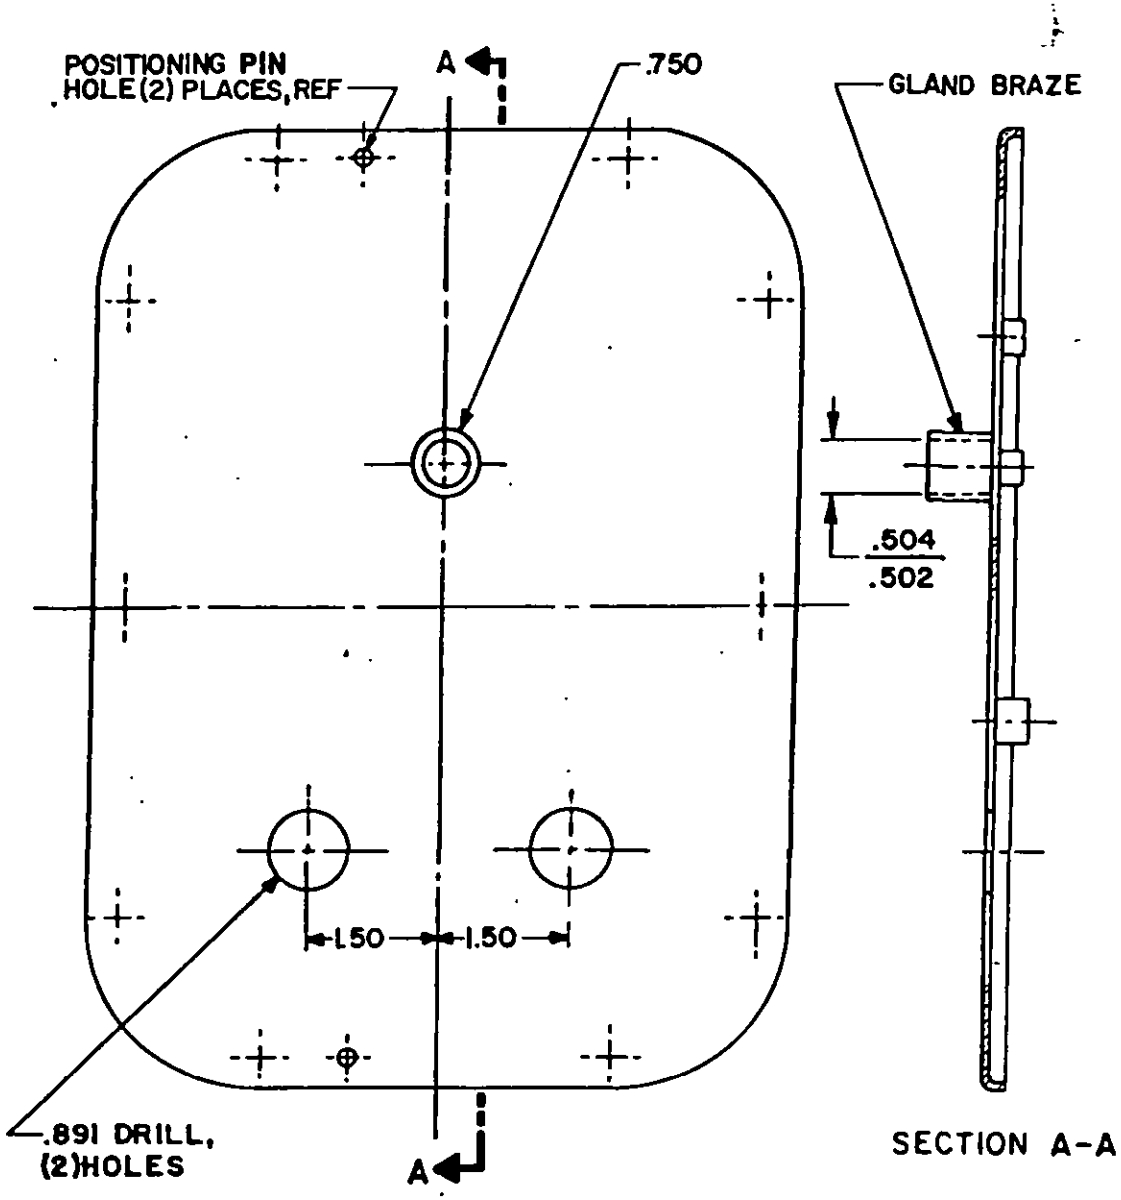



FIGURE 3. Cover assembly.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

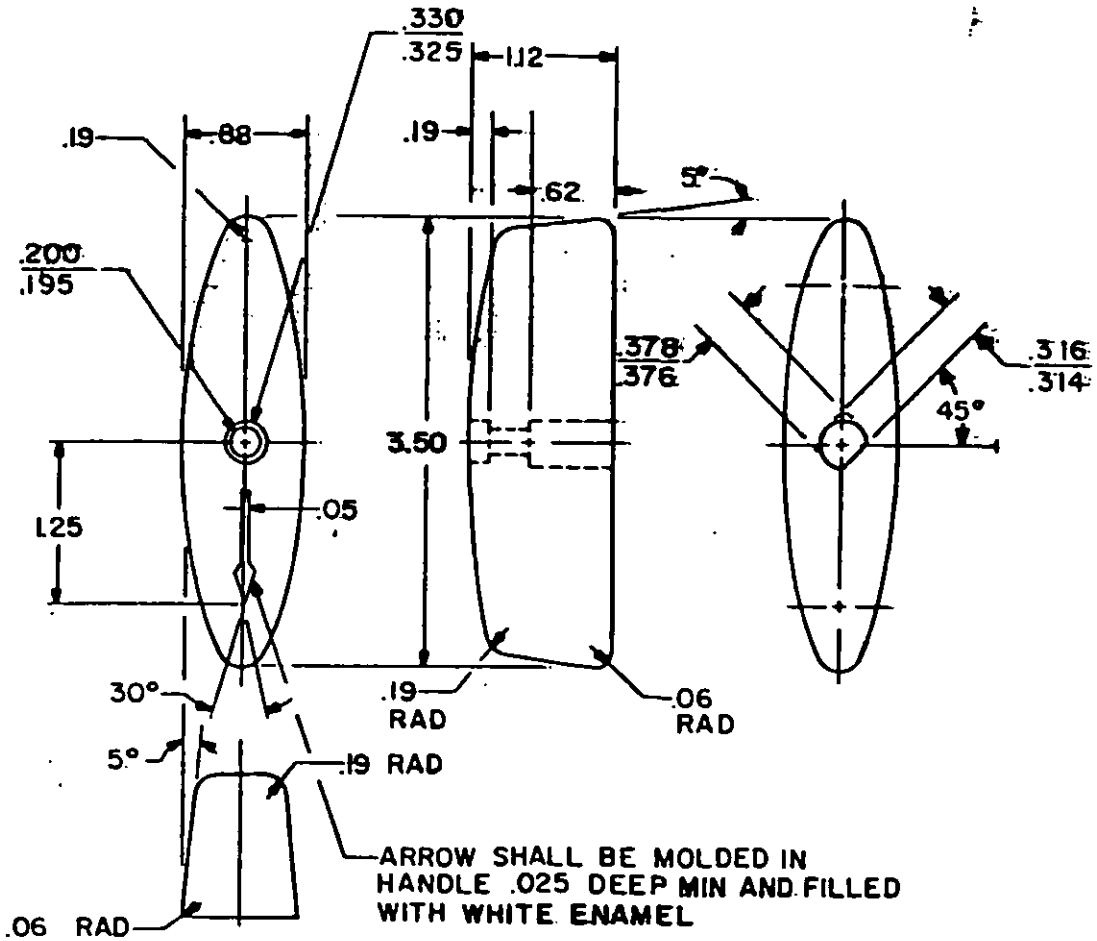



FIGURE 4. Handle. (04)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

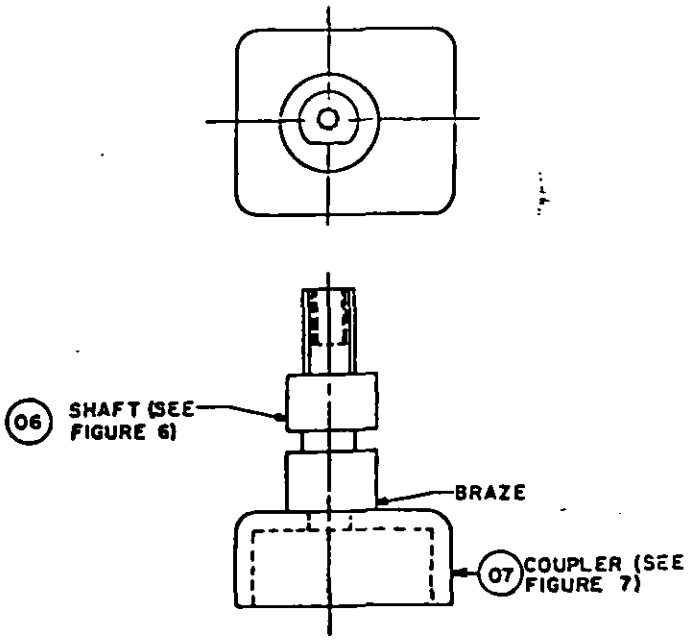



FIGURE 5. Shaft assembly. (05)

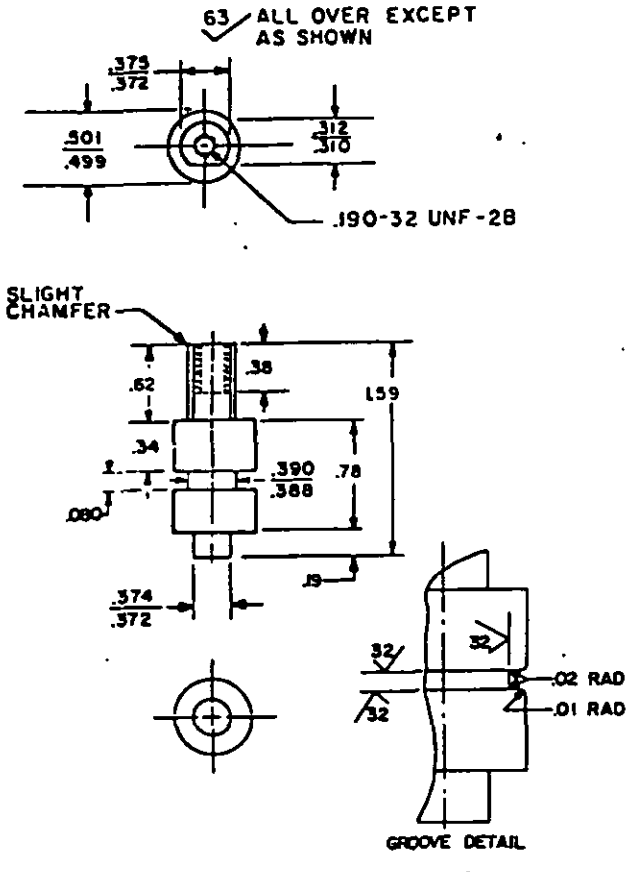



FIGURE 6. Shaft. (06)

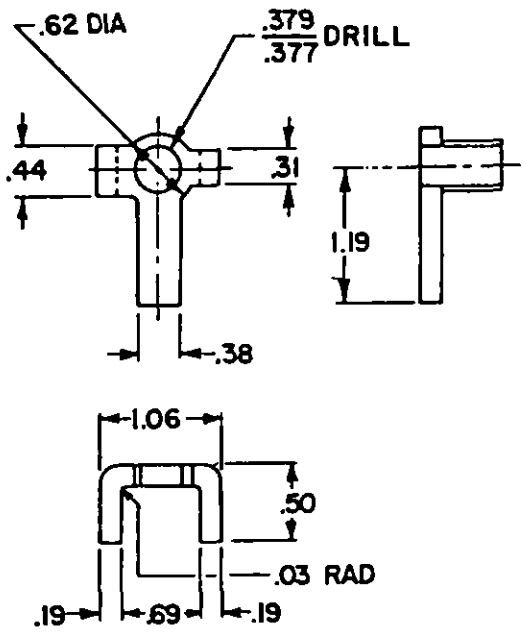



FIGURE 7. Coupler. (07)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

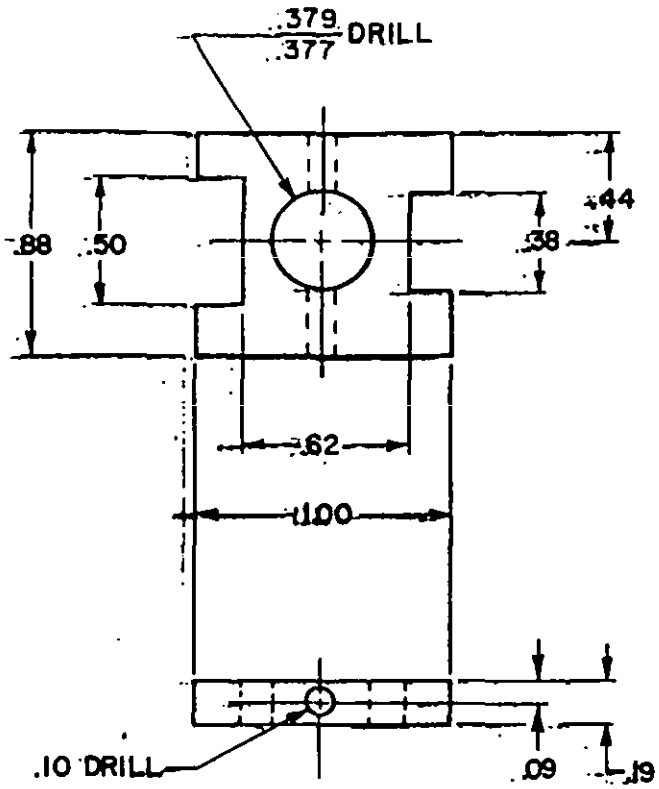



FIGURE 8. Coupler plate. (08)

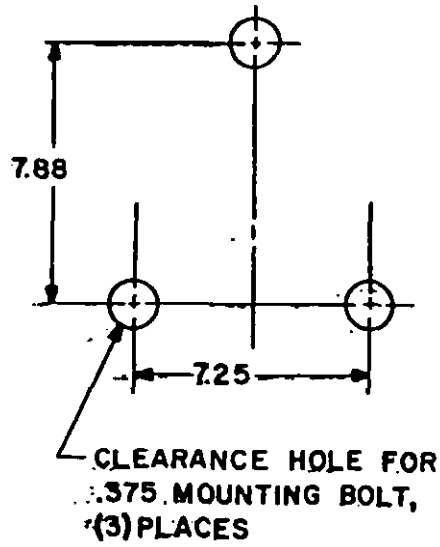



FIGURE 9. Mounting dimensions, ref.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

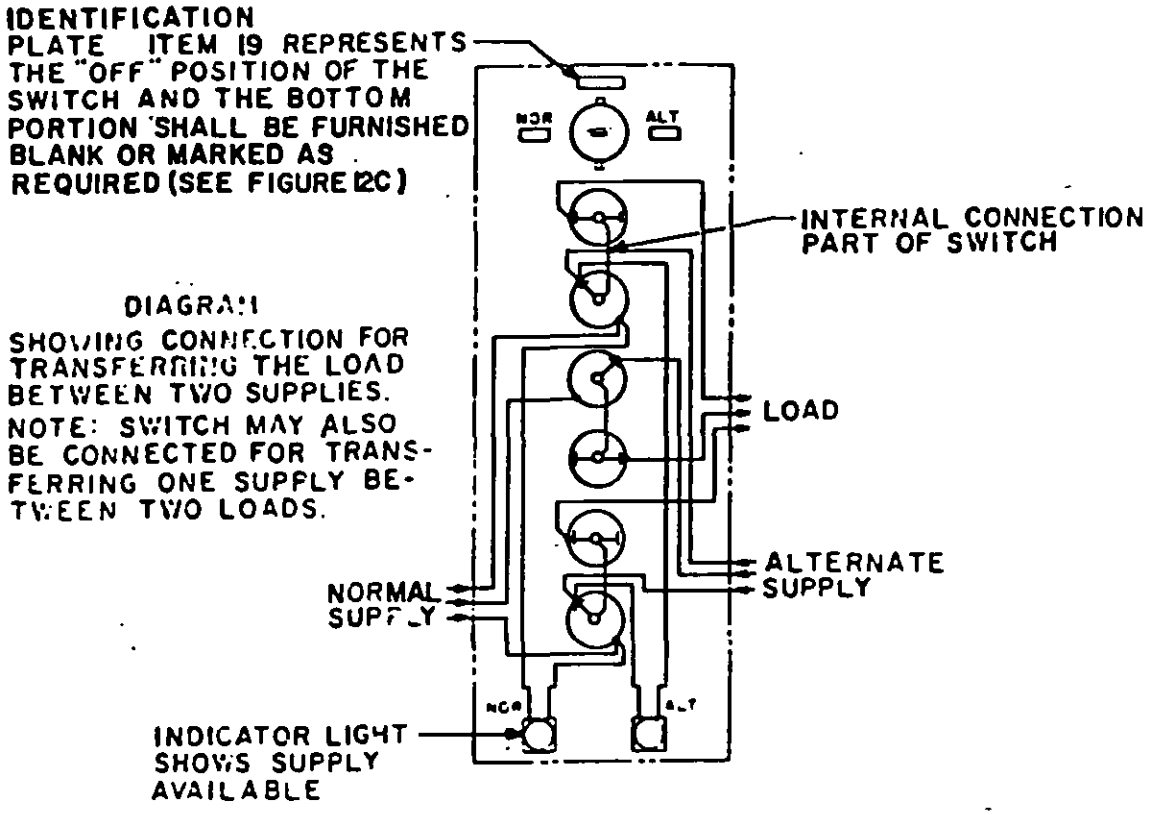



FIGURE 10. Wiring diagram. (09)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.


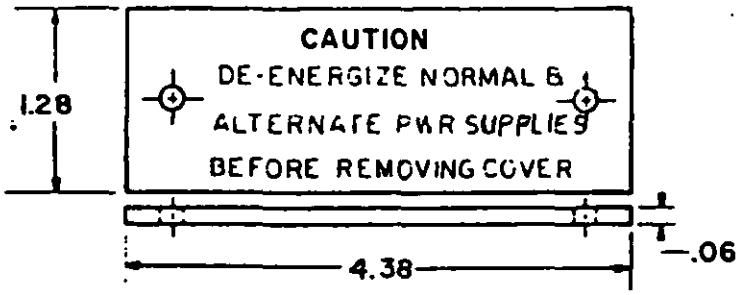



FIGURE 11. Caution plate. (16)




A. "ALT" information plate. (17)

B. "NOR" information plate. (18)

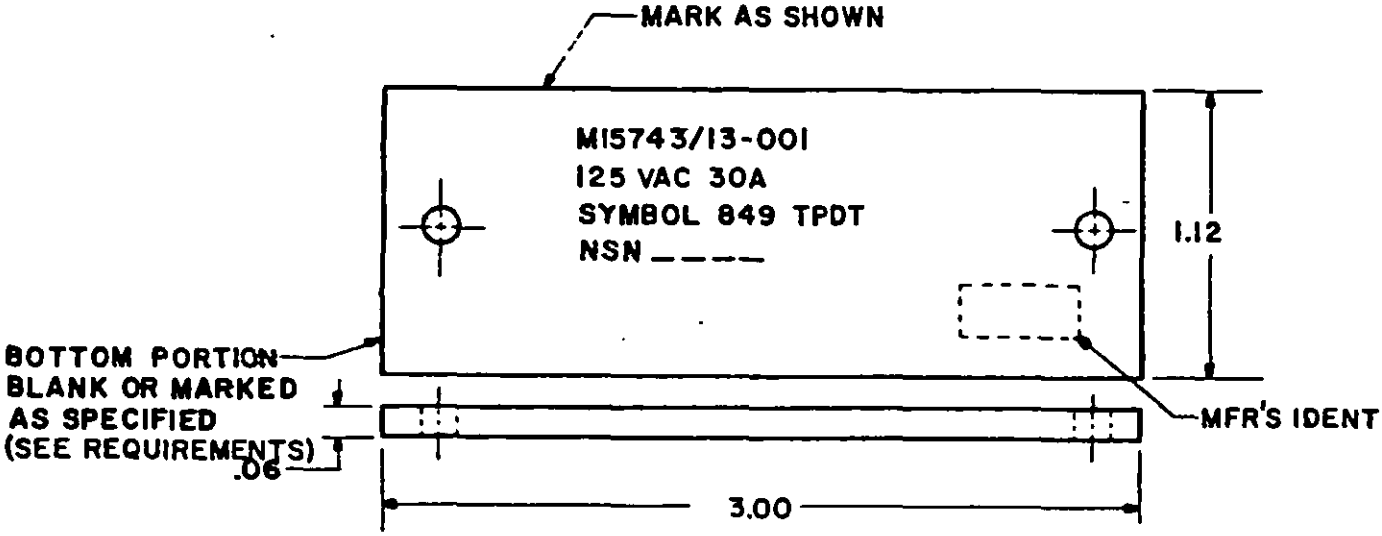


C. Identification plate. (19)

FIGURE 12. Identification and information plates.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-30 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Watertight.
Weight: 16 pounds maximum.
Designation and marking: See figures 11 and 12.
Identification data shall be as shown on figures 11 and 12. Unless otherwise specified in the ordering data, bottom portion of identification plate shall be blank as shown on figure 12.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part numbers and general information.

| Military part no. | Symbol no. | No. of poles and switching characteristics | Supersedes 1/ | | |
|---|---|---|---|---|---|
| | | | Type | Unit | Sheet |
| M15743/13-001 | 849 | TPDT | 3SR3B4- | | 1 |

1/ NAVSEA Drawing 815-1197224.

ORDERING DATA:

Acquisition documents should specify the following:
Additional identification plate marking, if required, (see requirements).



Source: https://assist.dla.mil -- Downloaded: 202640-18T07:59Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

| Item no.1/ | Description | Quantity M15743/13-001 | Material/specification | Remarks |
|---|---|---|---|---|
| 01 | Switch, enclosed (sym 849) | - | | See figure 1 |
| 02 | Enclosure | 1 | Brass, MIL-E-24142/3 (modified) | See figure 2 & 3 M24142/3-001 |
| 03 | O-ring | 1 | MS28775-012 | ---- |
| 04 | Handle (type CFI-10) | 1 | Plastic, black, type CFI-10 of MIL-M-14 | See figure 4 |
| 05 | Shaft assembly | 1 | ---- | See figure 5 |
| 06 | Shaft | 1 | Ni-Cu alloy of QQ-N-281 | See figure 6 |
| 07 | Coupler | 1 | Brass, ASTM B 36, ASTM B 121 | See figure 7 |
| 08 | Coupler plate | 1 | CRES, class 304 or 316 of QQ-S-766 | See figure 8 |
| 09 | Wiring diagram | 1 | MIL-E-2036 | See figure 10 |
| 10 | Switch (type 3SR3B4) | 1 | MIL-S-15291/7 | M15291/7-009 |
| 11 | Cable clamp | 2 | Nylon, coml | ---- |
| 12 | Lamp, incandescent | 4 | MS15612-3 | Industry no. TS-159 |
| 13 | Light, indicator | 2 | MIL-L-3661/65 | Style LH 98/3 |
| 14 | Target cap assy "ALT" and "NOR" | 1 ea | Style LC38RNIM, MIL-L-3661/52 | ---- |
| 15 | Wiring diagram holder | 1 | MIL-E-24142 | See figure 2 |
| 16 | Caution plate | 1 | ASTM B 36, ASTM B 121 | See figure 11 |
| 17 | Information plate "ALT" | 1 | ASTM B 36, ASTM B 121 | See figure 12a |
| 18 | Information plate "NOR" | 1 | ASTM B 36, ASTM B 121 | See figure 12b |
| 19 | Identification plate | 1 | ASTM B 36, ASTM B 121 | See figure 12c |

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5930-N746-13)



Source: https://assist.dla.mil -- Downloaded: 202610-18T07:59Z
Check the source to verify that this is the current version before use.