INCH-POUND
MIL-DTL-15743/13E
6 November 2023
SUPERSEDING
MIL-DTL-15743/13D
27 August 2018

DETAIL SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, DRIPPROOF ACTION, TRANSFER, WITH INDICATION, 125 VOLTS ALTERNATING CURRENT, 30 AMPERE, SYMBOL 849 (TPDT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-15743.

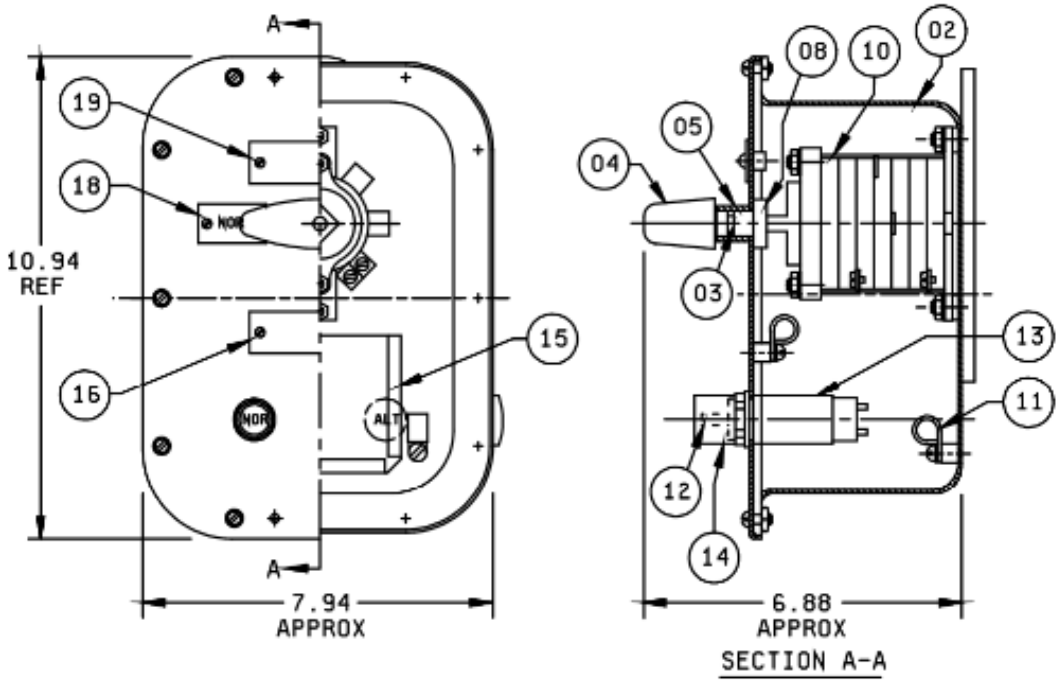


FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

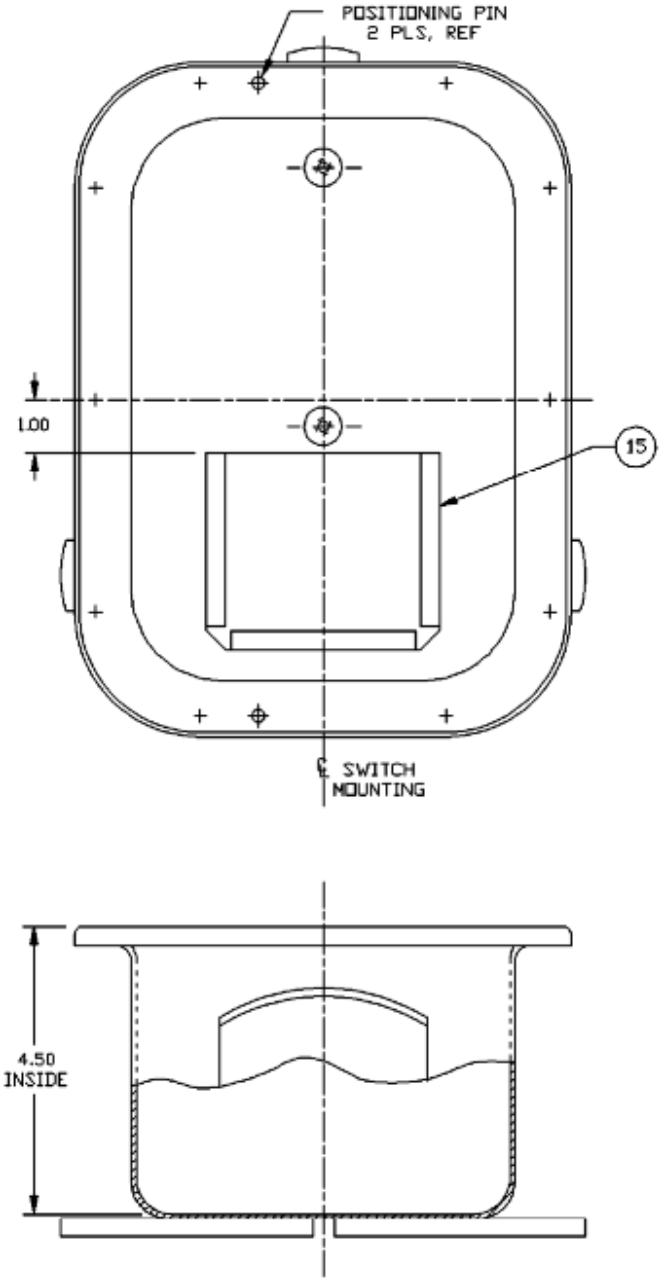


FIGURE 2. Box assembly (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

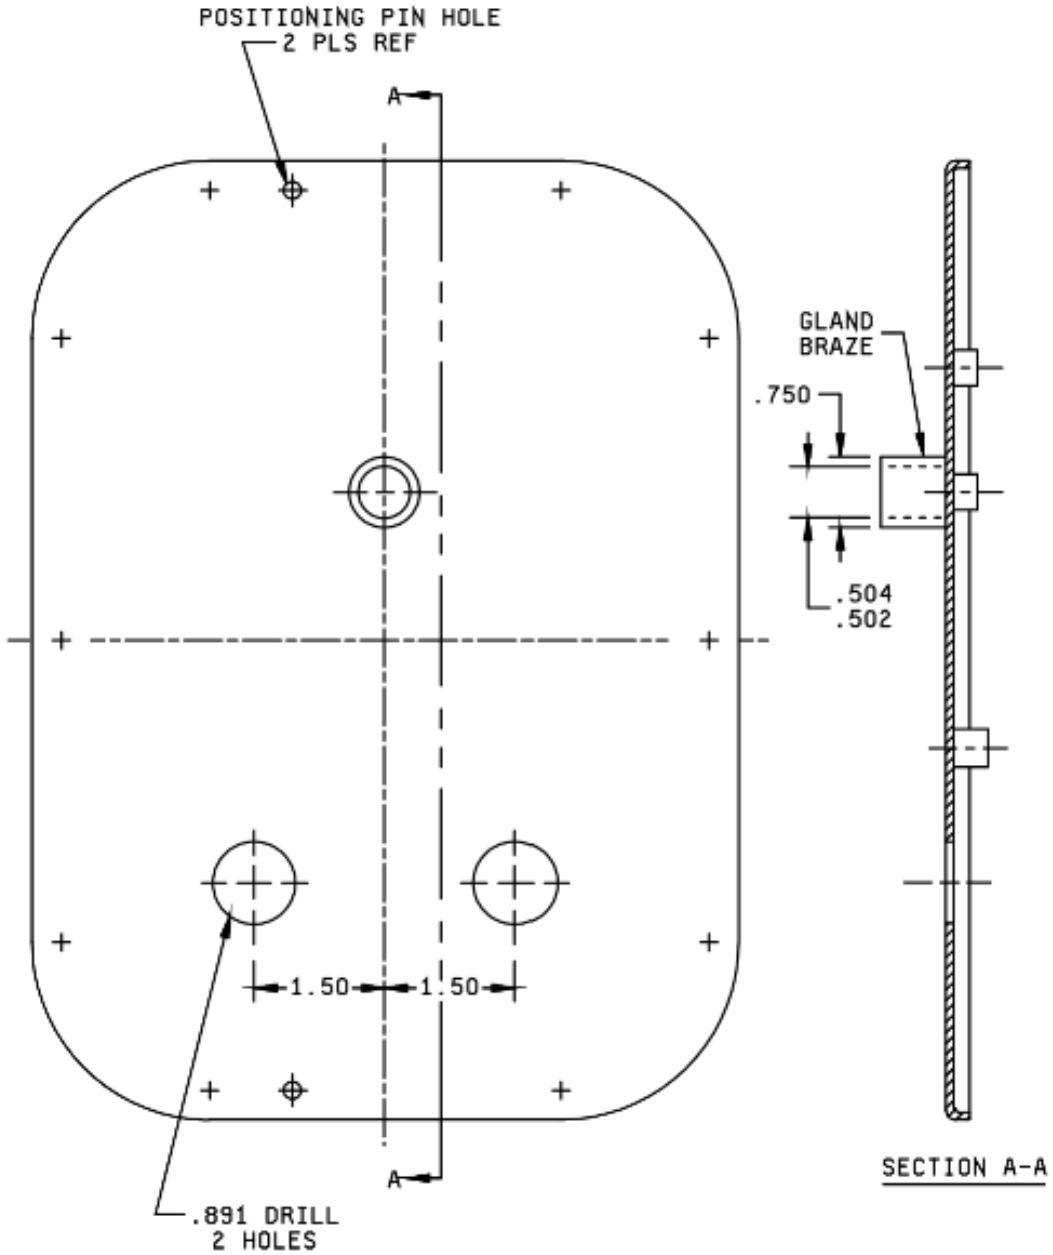


FIGURE 3. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

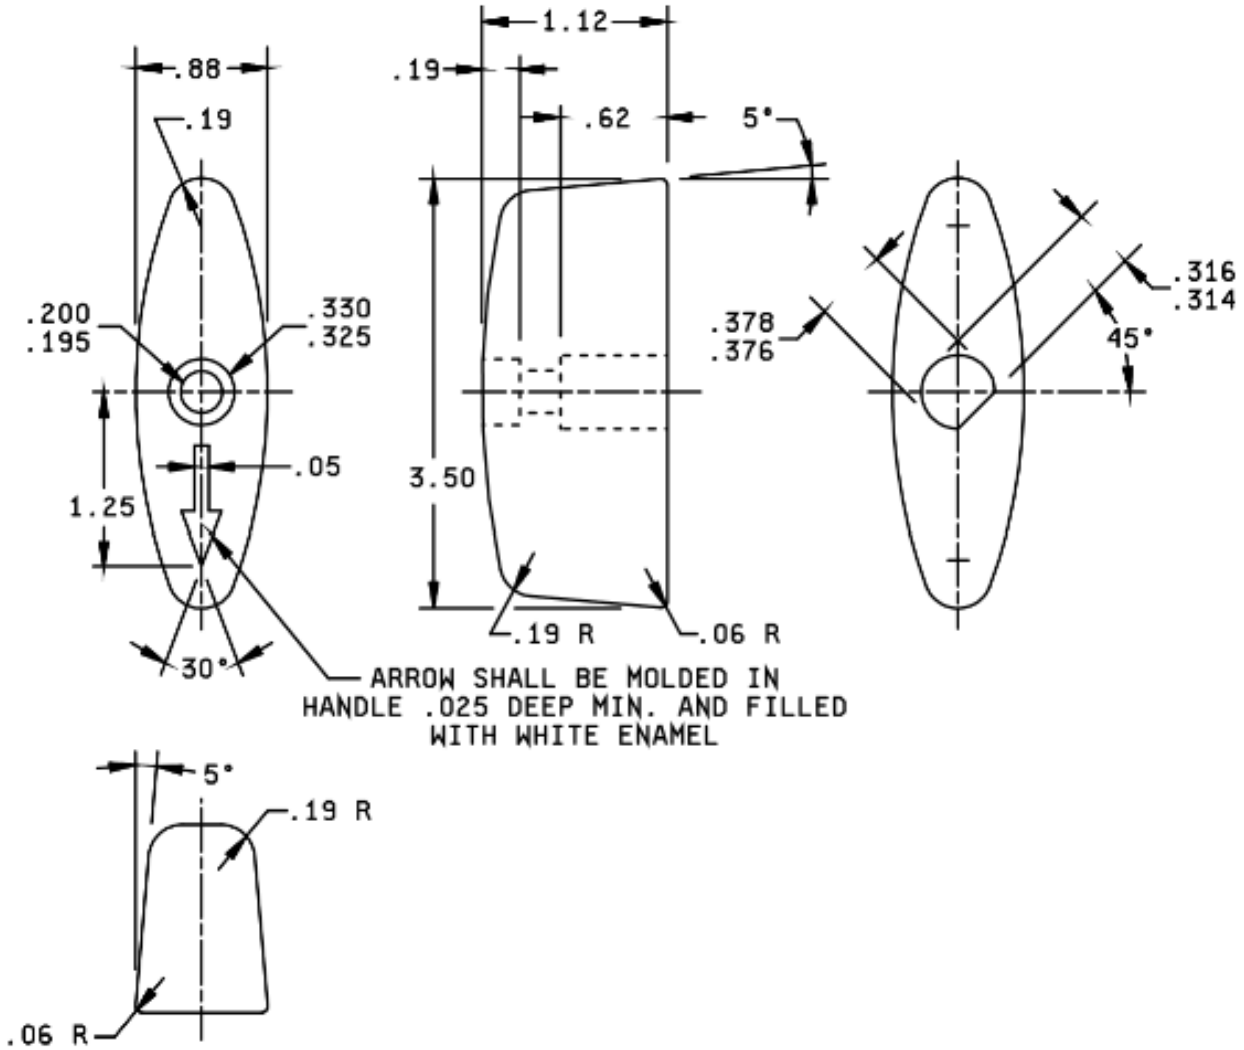


FIGURE 4. Handle. 04

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

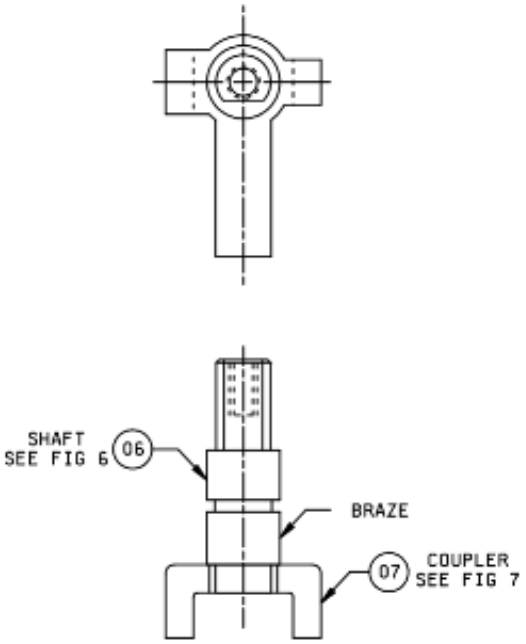


FIGURE 5. Shaft assembly. 05

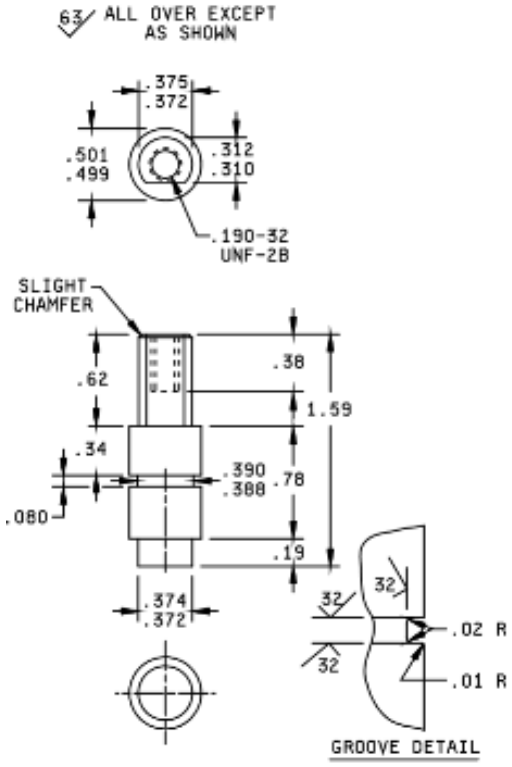


FIGURE 6. Shaft. 06

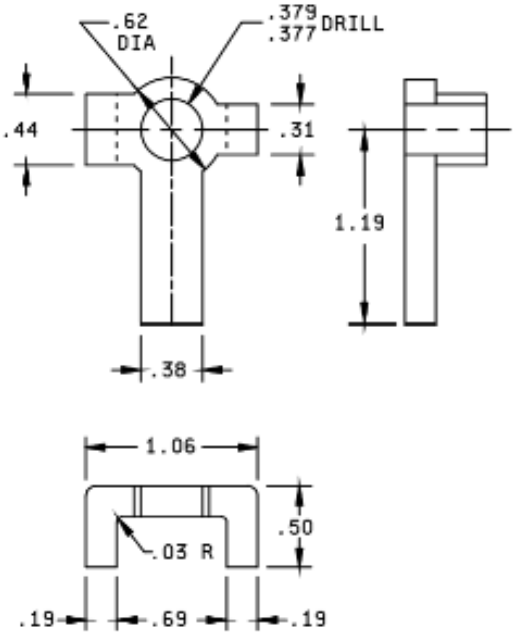


FIGURE 7. Coupler. 07

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

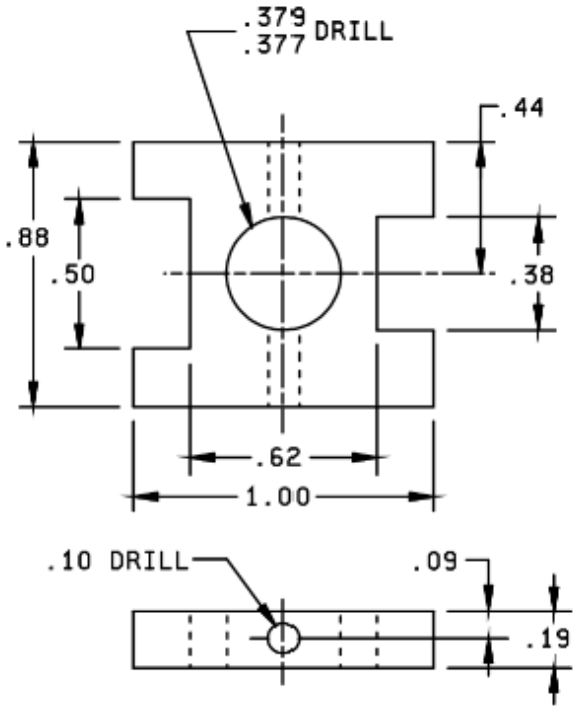


FIGURE 8. Coupler plate. 08

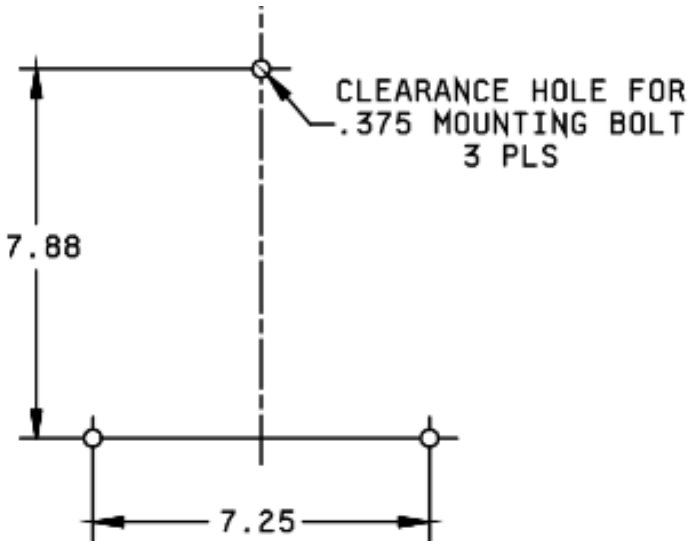


FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

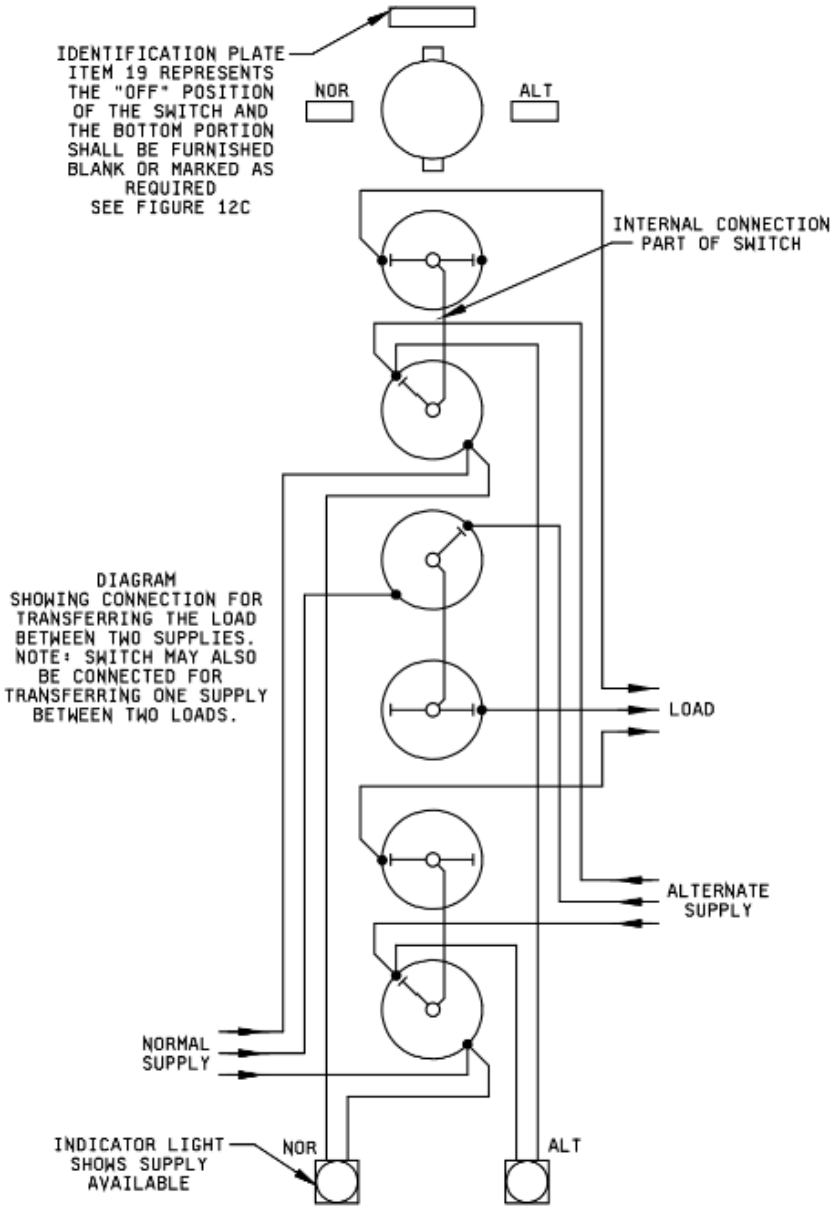


FIGURE 10. Wiring diagram. 09

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.



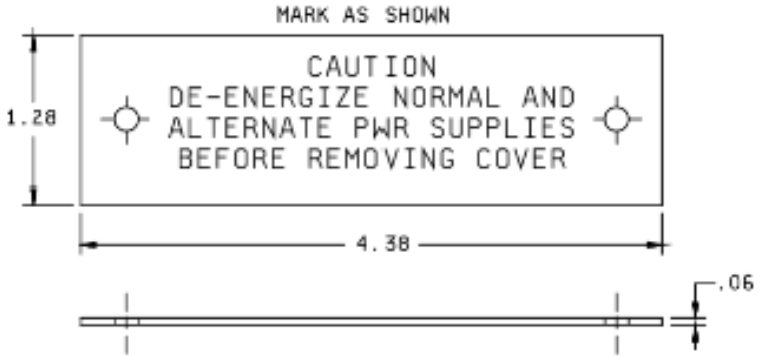



FIGURE 11. Caution plate. (16)

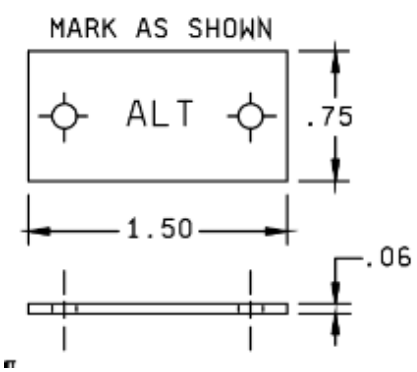

A. "ALT" information plate. (17)

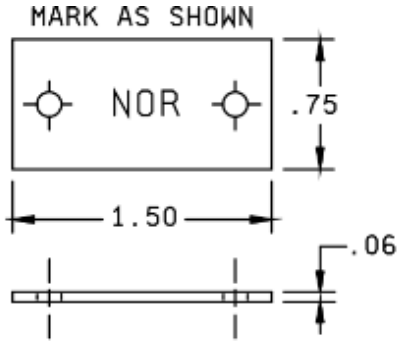

B. "NOR" information plate. (18)

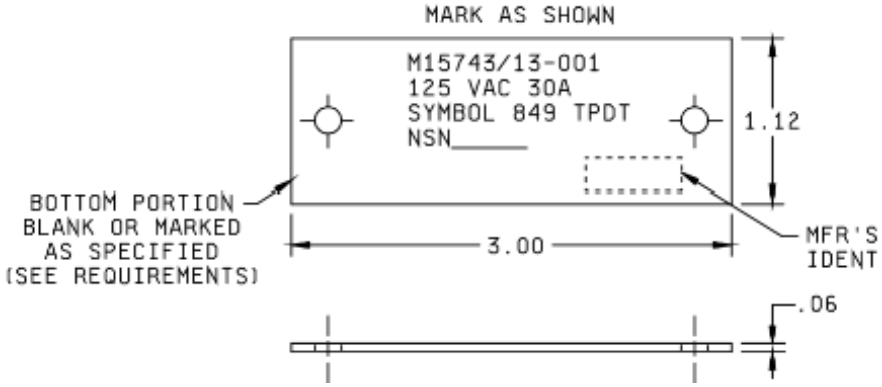

C. Identification plate. (19)

FIGURE 12. Identification and information plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 V ac, 0-30 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Dripproof.
Weight: 16 pounds maximum.
Designation and marking: See figures 11 and 12.
Identification data shall be as shown on figures 11 and 12. Unless otherwise specified in the ordering data, bottom portion of identification plate shall be blank as shown on figure 12.
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/ Type
M15743/13-001	849	TPDT	3SR3B4-

1/ From NAVSEA Drawing 815-1197224.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/13-001	Material / specification	Remarks
01	Switch, enclosed (sym 849)	-		See figure 1
02	Enclosure	1	Brass, MIL-E-24142/3 (modified)	See figure 2 & 3 M24142/3-001
03	O-ring	1	SAE-AS28775-012 2/	----
04	Handle (Type CFI-10)	1	Plastic, black, type CFI-10 of ASTM-D5948	See figure 4
05	Shaft assembly	1	----	See figure 5
06	Shaft	1	Ni-Cu alloy of QQ-N-281, Stainless Steel, or Brass	See figure 6
07	Coupler	1	Brass, ASTM-B36/B36M, ASTM-B121/B121M	See figure 7
08	Coupler plate	1	CRES, or equivalent	See figure 8
09	Wiring diagram	1	MIL-DTL-2036	See figure 10
10	Switch (type 3SR3B4)	1	MIL-DTL-15291/7	M15291/7-009
11	Cable clamp	2	Nylon, coml	----
12	Lamp, incandescent	4	MIL-DTL-6363	Industry no.TS-159
13	Light, indicator	2	MIL-DTL-3661/65	Style LH 98/3
14	Target cap assy “ALT” and “NOR”	1 ea	Style LC38RNIM MIL-L-3661/52	----
15	Wiring diagram holder	1	MIL-E-24142	See figure 2
16	Caution plate	1	ASTM-B36/B36M, ASTM-B121/B121M	See figure 11
17	Information plate “ALT”	1	ASTM-B36/B36M, ASTM-B121/B121M	See figure 12a
18	Information plate “NOR”	1	ASTM-B36/B36M, ASTM-B121/B121M	See figure 12b
19	Identification plate	1	ASTM-B36/B36M, ASTM-B121/B121M	See figure 12c

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ SAE-AS28775-010 details are found in SAE-AS28775.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-DTL-15743, this document references the following:

MIL-DTL-6363	MIL-E-24142	ASTM-D5948
MIL-DTL-15291/7	MIL-E-24142/3	SAE-AS28775
MIL-DTL-2036	QQ-N-281	NAVSEA DWG 815-1197224
MIL-L-3661/52	ASTM-B36/B36M	
MIL-DTL-3661/65	ASTM-B121/B121M	

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2023-051)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.