INCH-POUND
MIL-DTL-15743/16D
6 November 2023
SUPERSEDING
MIL-DTL-15743/16C
27 August 2018

DETAIL SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), CONTACT MAKER, SIX-POLE, TWO-POSITION, SPRING-RETURN, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOL 2637.1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-15743.

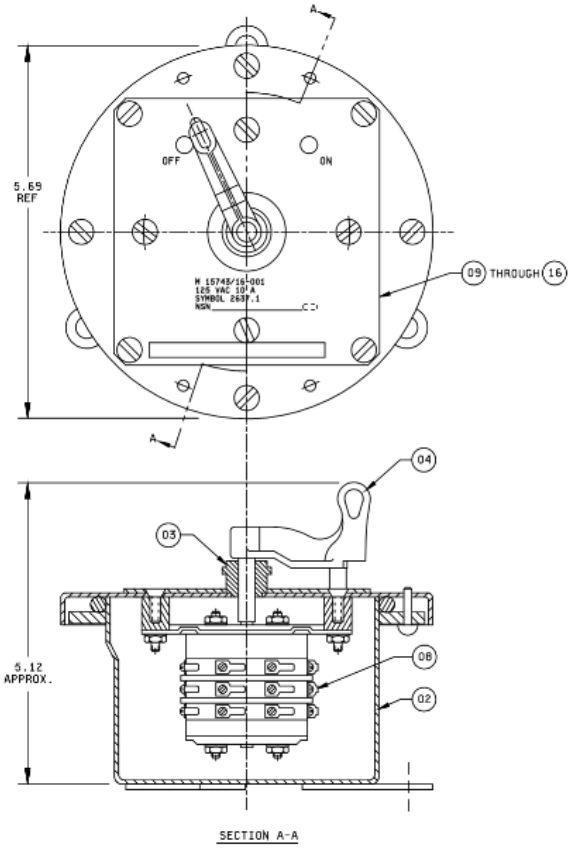


FIGURE 1. Switch, enclosed.

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

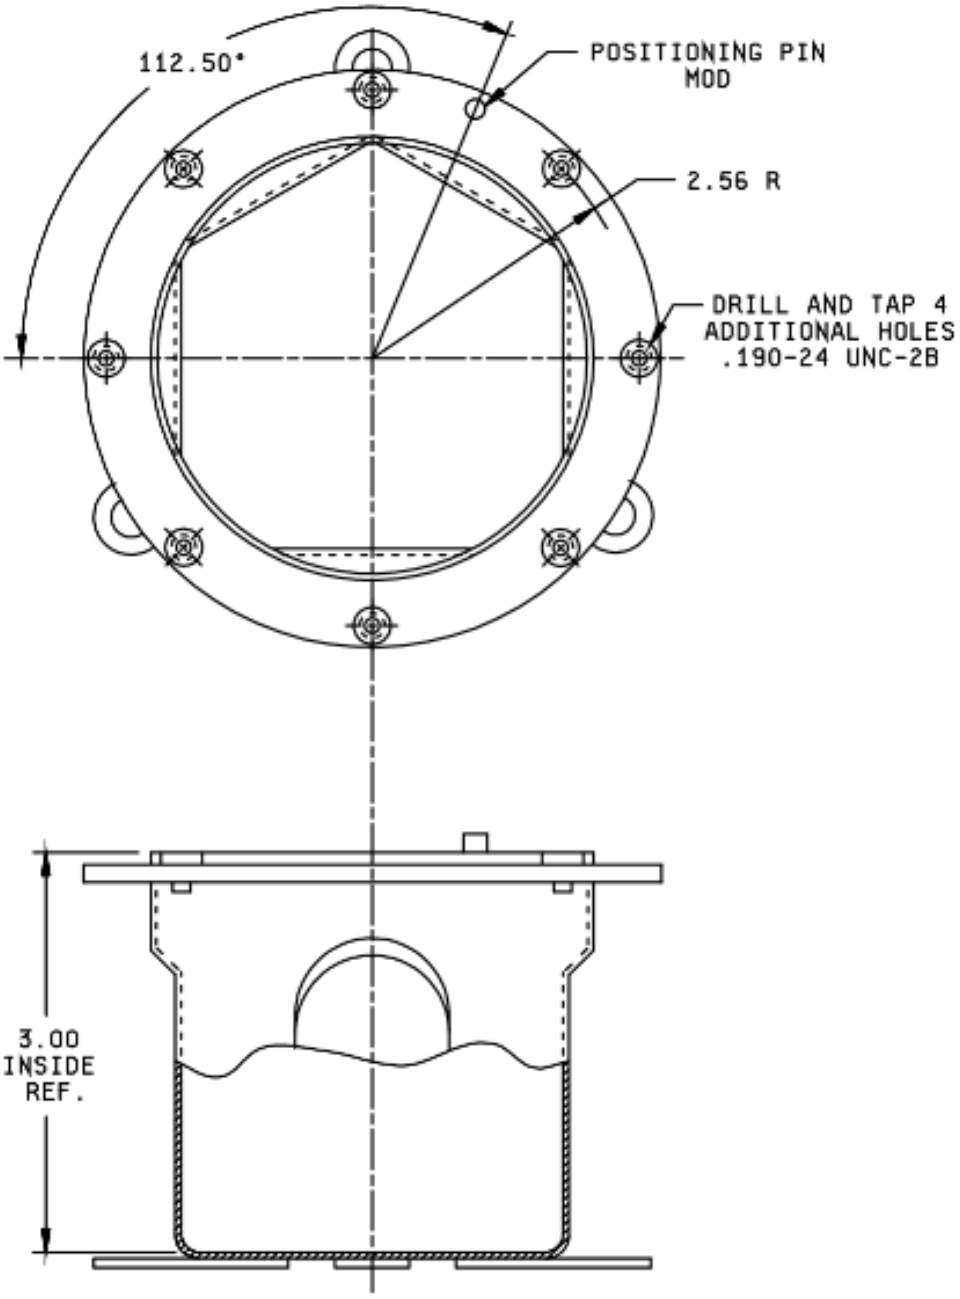


FIGURE 2. Box assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.


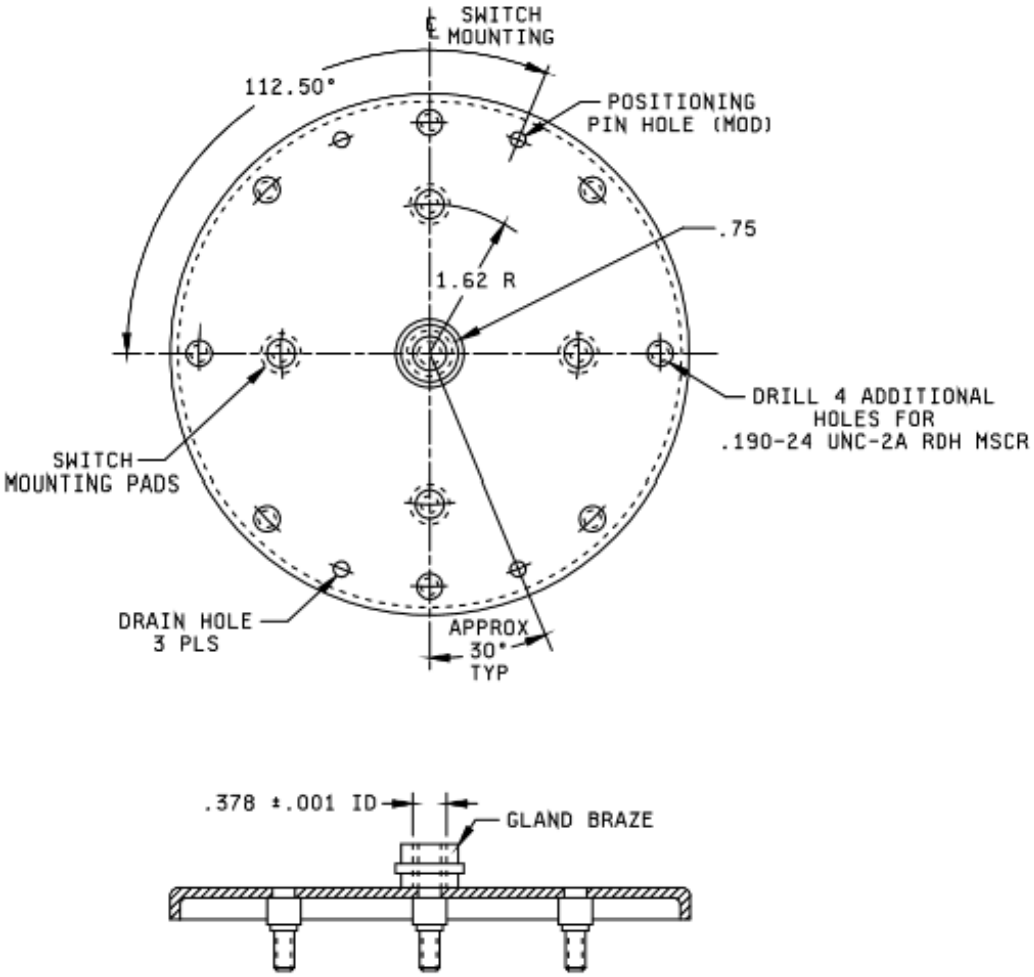



FIGURE 3. Cover assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

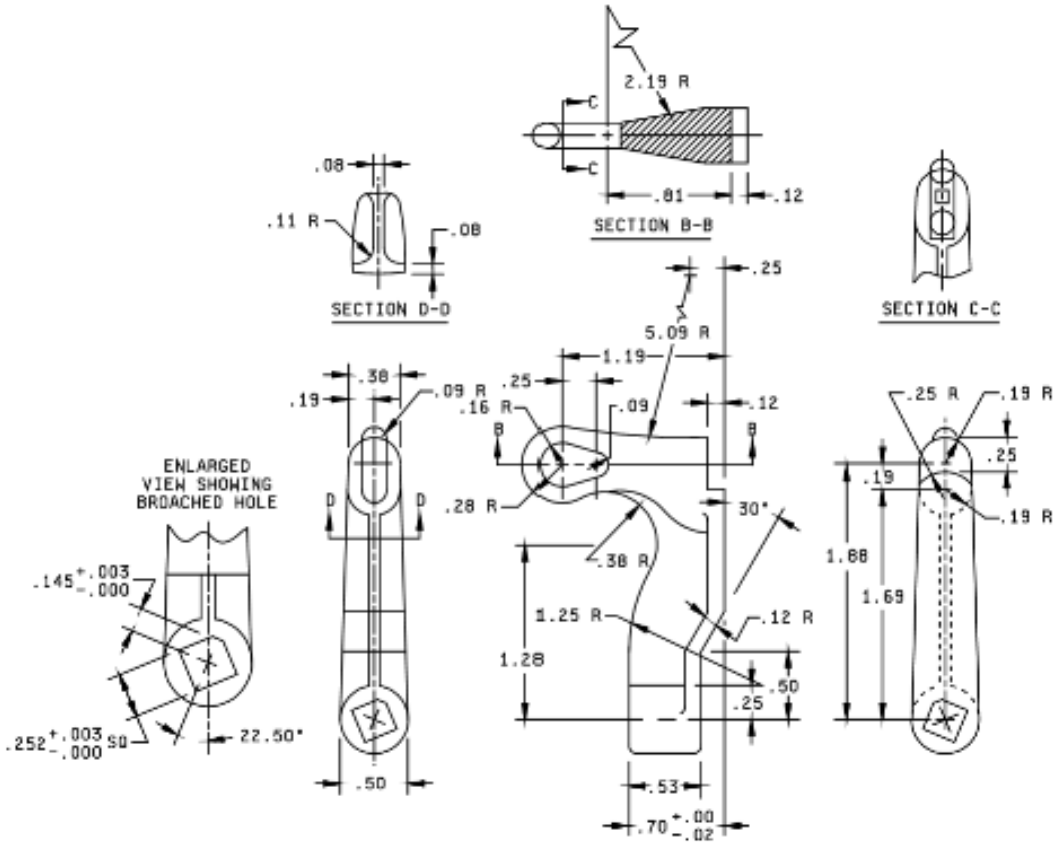

SH 131301


FIGURE 4. Handle. 04

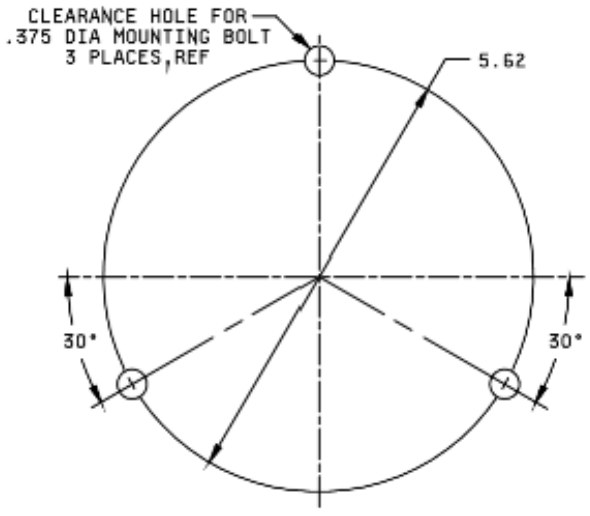

SH 131302

FIGURE 5. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

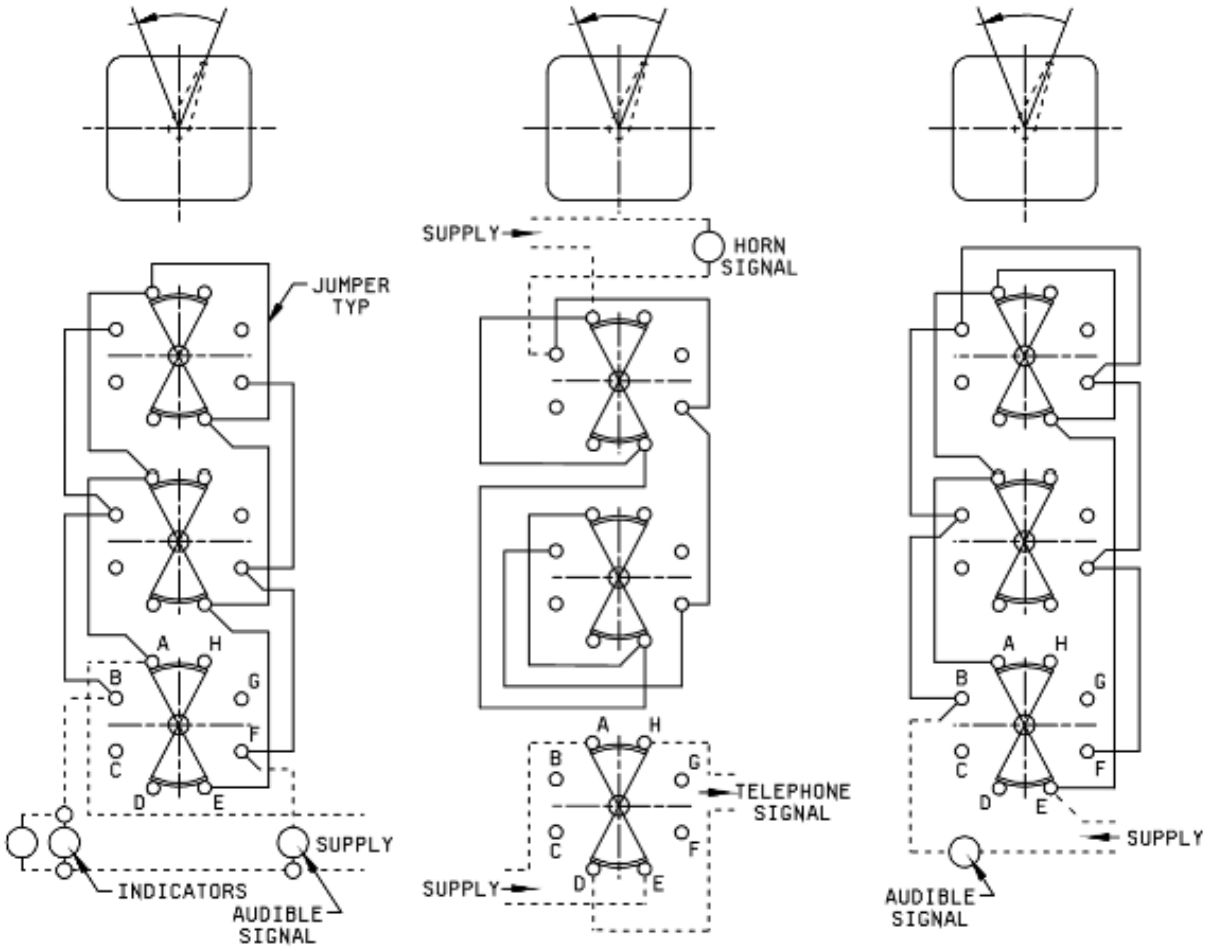


A. (See table I) 05 B. (See table I) 06 C. (See table I) 07

NOTE: Wiring diagrams are rear view of switch; handle moves “RIGHT ON” (as viewed from front of switch).

SH 131303

FIGURE 6. Wiring diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

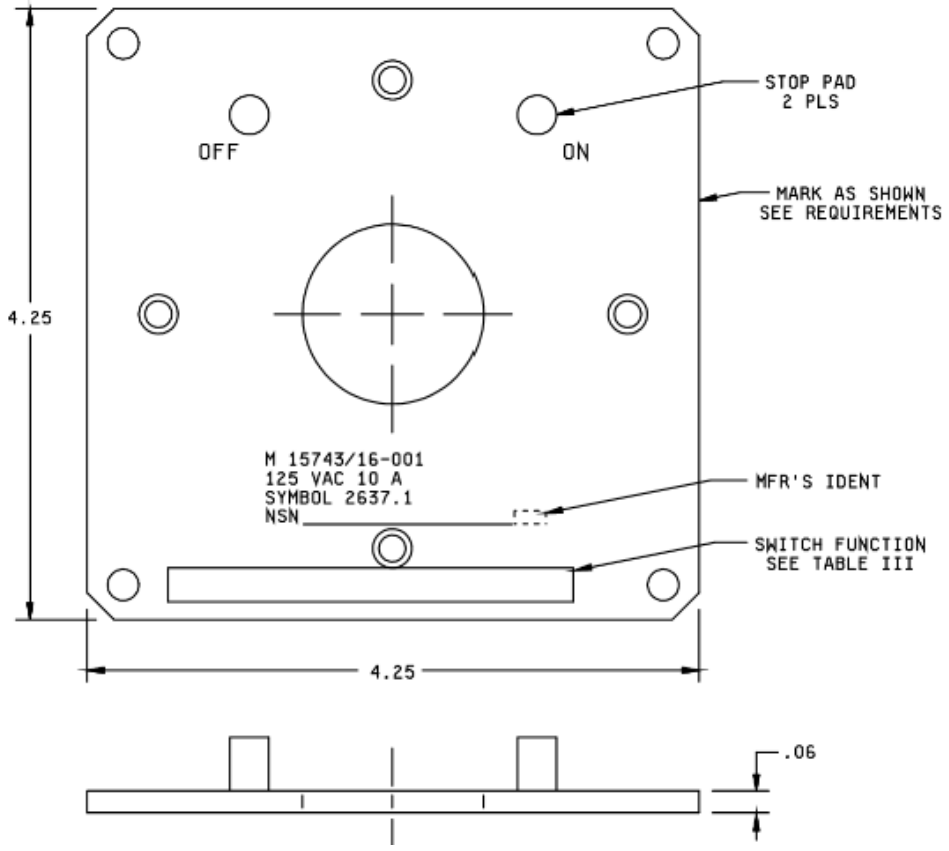

SH 131304

FIGURE 7. Identification plate. (09) through (16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 V ac, 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 5.
Wiring diagram: See figure 6.
Mounting dimensions: See figure 5.
Degree of enclosure: Submersible (15 feet).
Weight: 4 pounds maximum.
Designation and marking: See figures 7.
Identification data shall be blank as shown on figure 7. Unless otherwise specified in the ordering data, switch action marking shall be as shown on figure 7. Switch function marking shall be as shown in table III.
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	Supersedes 1/		
		Type	Revision	Date
M15743/16-001	2637.1	S2JRM3-2	H	7/10/80

1/ From NAVSEA Drawing 803-74055.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/16-001	Material / specification	Remarks
01	Switch, enclosed (sym 2637.1)	-	----	See figure 1
02	Enclosure	1	MIL-E-24142/5	M24142/5-002 Mod 2/
03	O ring seal	1	SAE-AS28775-012 4/	----
04	Handle	1	Copper alloy 854 or equivalent	See figure 4
05	Wiring diagram	3/ 1	MIL-DTL-2036	See figure 6a
06	Wiring diagram	3/ 1	MIL-DTL-2036	See figure 6b
07	Wiring diagram	3/ 1	MIL-DTL-2036	See figure 6c
08	Switch (type JRM 300)	1	MIL-DTL-21604/7	----
09 - 16	Identification plate	3/ 1 ea.	ASTM-B36/B36M, ASTM-B121/B121M	See figure 7

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure to change location of positioning pin and hole (see figures 2 and 3).
3/ See table III for switch-function marking and parts selection.
4/ SAE-AS28775-010 details are found in SAE-AS28775.

TABLE III. Switch function and parts selection data.

Switch function 1/ (see figure 7)	Parts selection	
	Identification plate item no.	Wiring diagram item no.
Blank	09	None
Whistle switch	10	07
Cease firing	11	06
More feed	12	05
Feed started	13	05
Emergency feed started	14	05
Start emergency feed	15	05
Aircraft contact	16	2/

1/ Switch function shall be as specified in the ordering data. When not specified, or when enclosed switches are being ordered for stock in the supply system, the switch function shall be blank (item 09).
2/ Wiring diagram shall be as specified in the ordering data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

Referenced documents, In addition to MIL-DTL-15743, this document references the following:
MIL-DTL-21604/7
MIL-DTL-2036
MIL-E-24142/5
ASTM-B36/B36M
ASTM-B121/B121M
NAVSEA DWG 803-74055
SAE-AS28775

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2023-052)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.