
MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), CONTACT MAKER, SIX-POLE, TWO-POSITION, SPRING-RETURN, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOL 2638.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-15743(SH).

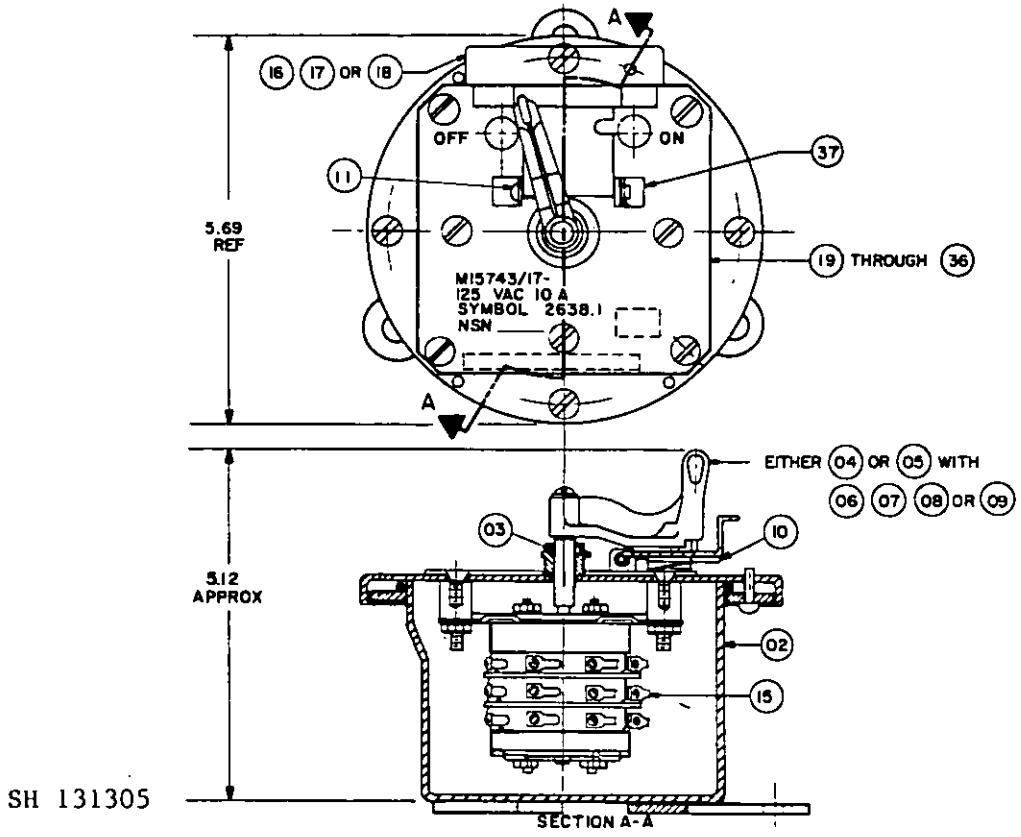


SH 131305

FIGURE 1. Switch, enclosed. (01)
(-001 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

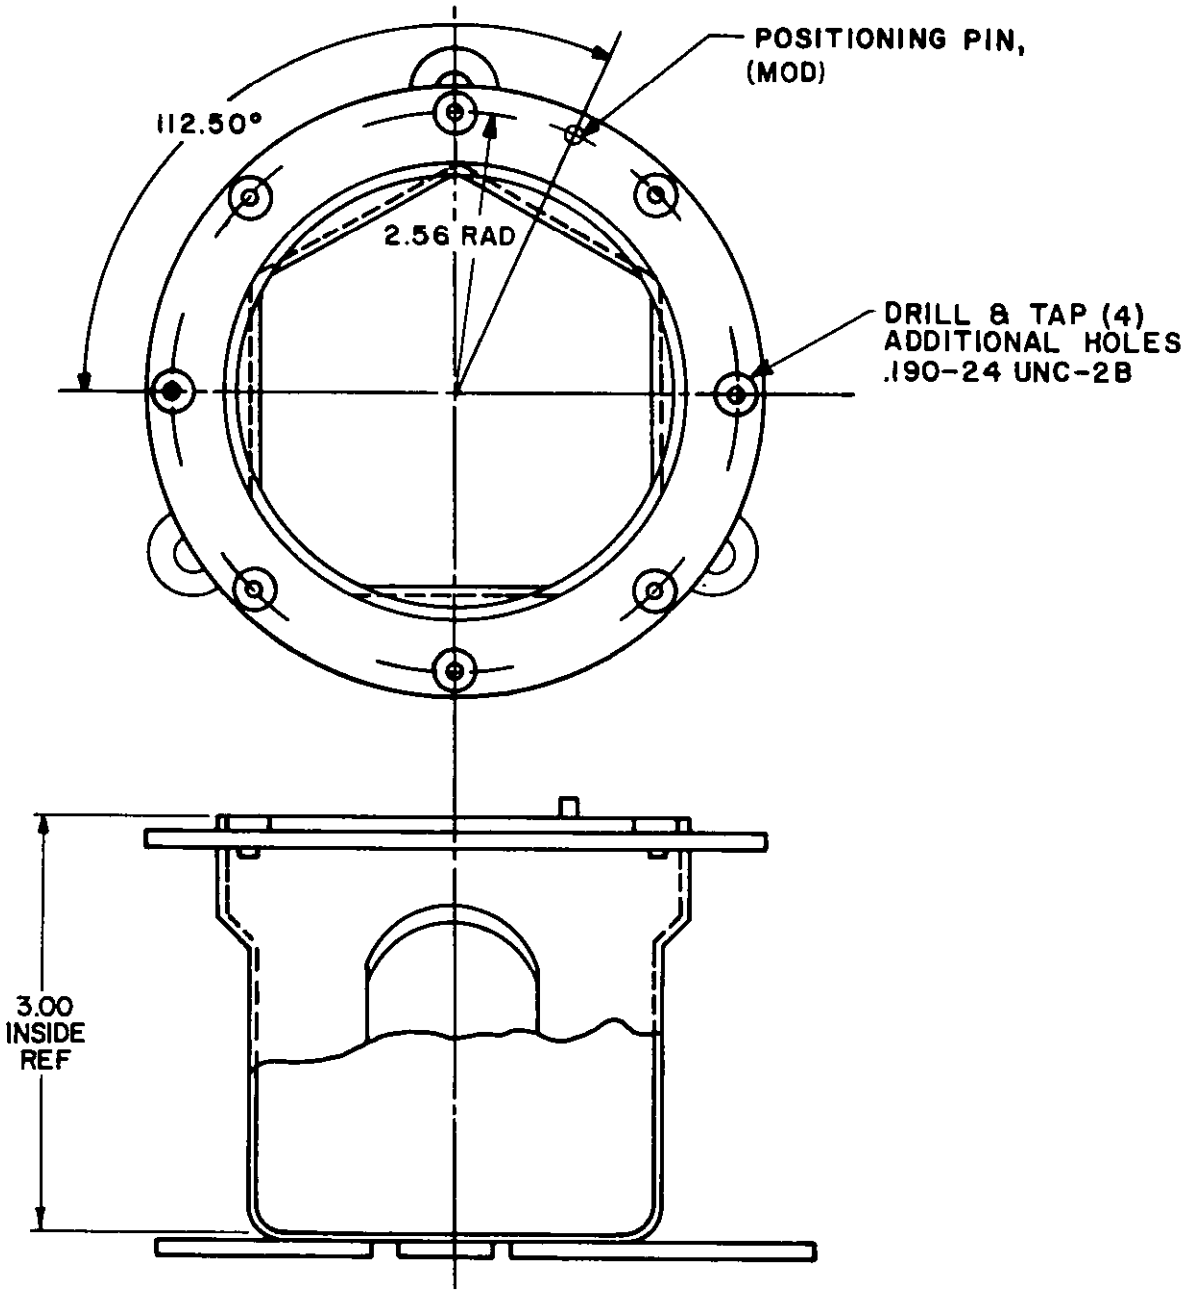

SH 131306

FIGURE 2. Box assembly (modified).


Source: https://assist.dla.mil -- Downloaded: 202610-18T08:01Z
Check the source to verify that this is the current version before use.

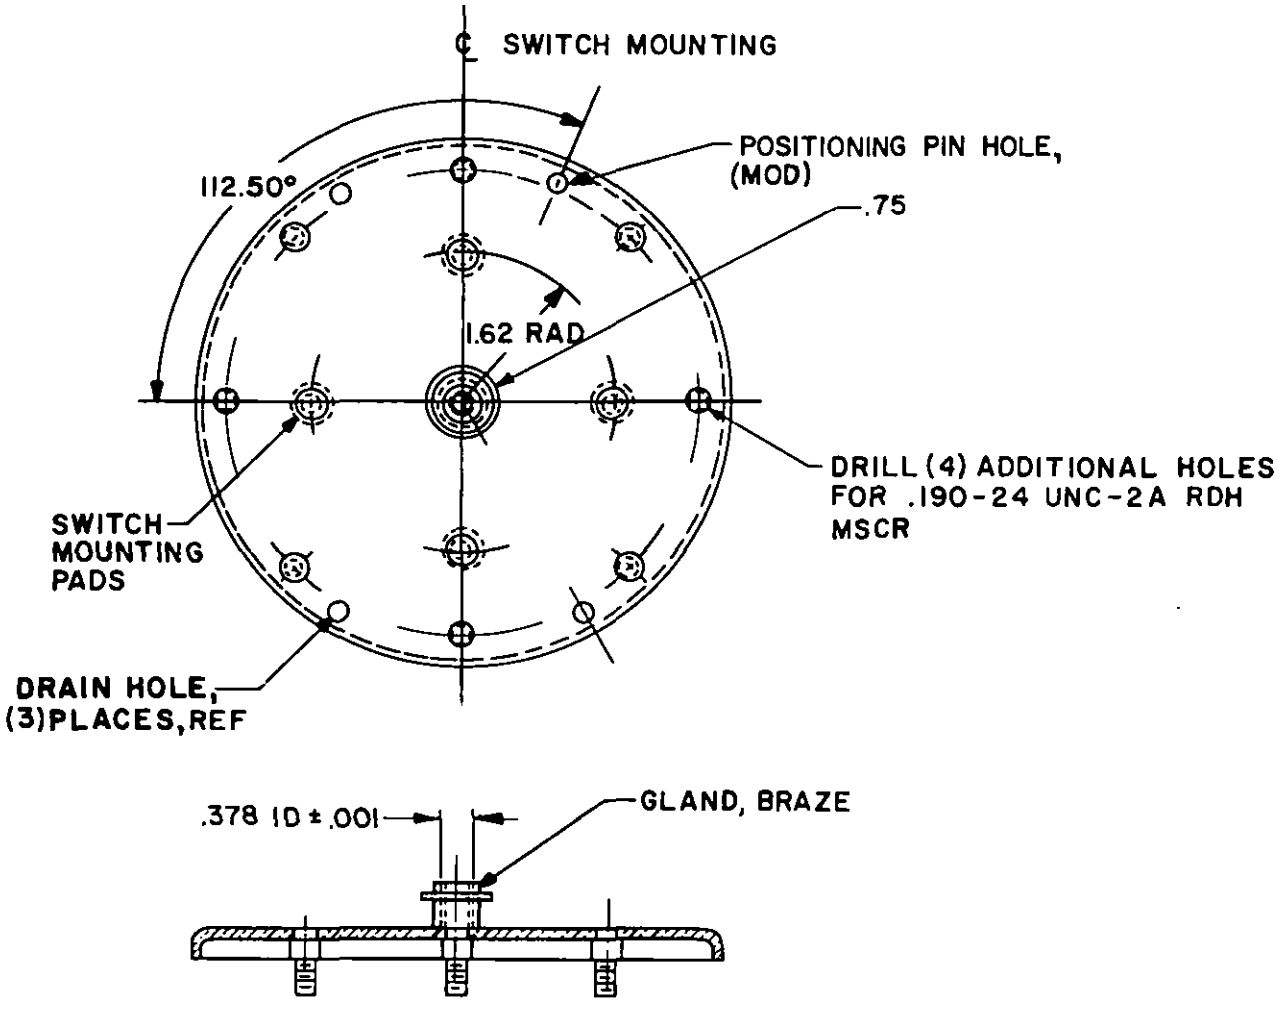

SH 131307


FIGURE 3. Cover assembly, (modified).

Source: https://assist.dla.mil - Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

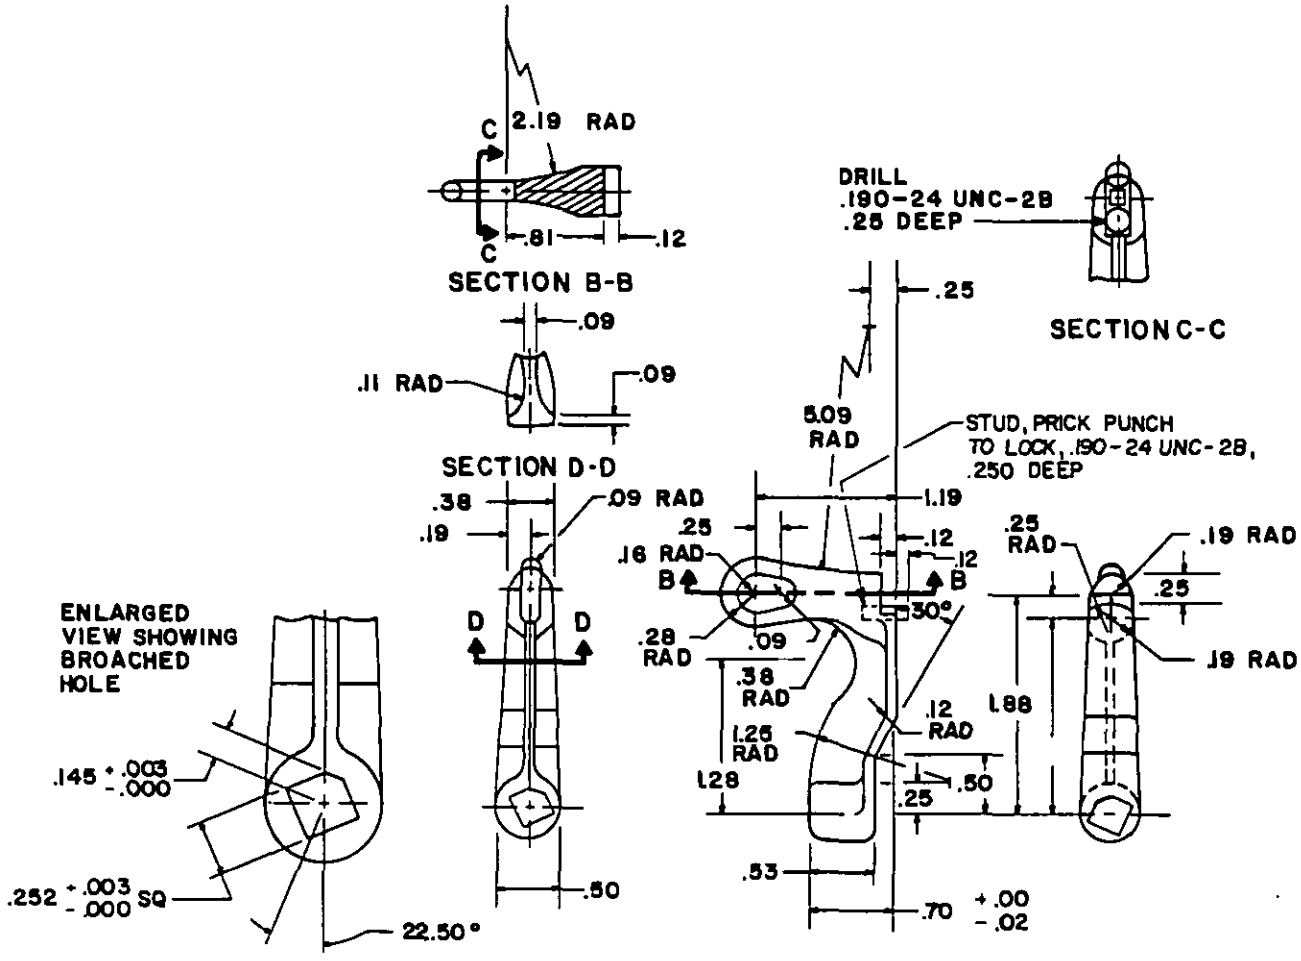

SH 131308


FIGURE 4. Handle. (04)

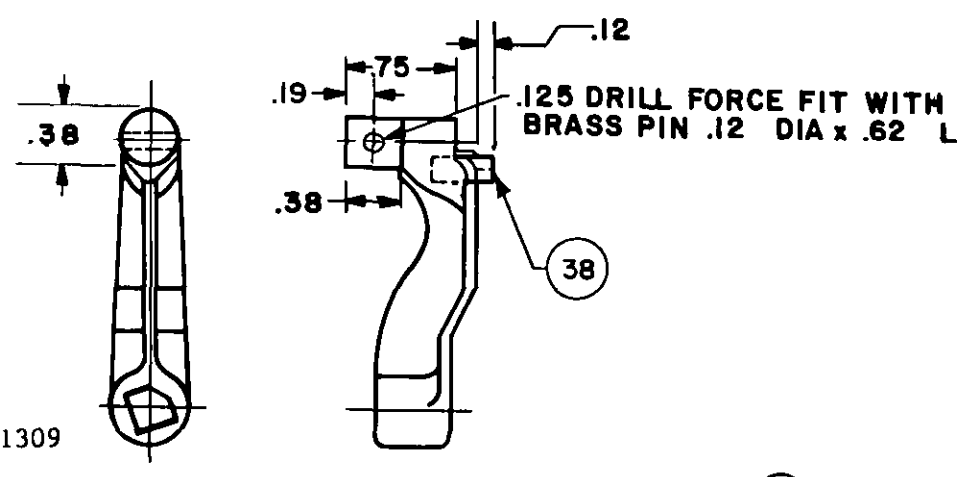


SH 131309

FIGURE 5. Handle body (for knobs). (05)
(same as item 04 except as shown)


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

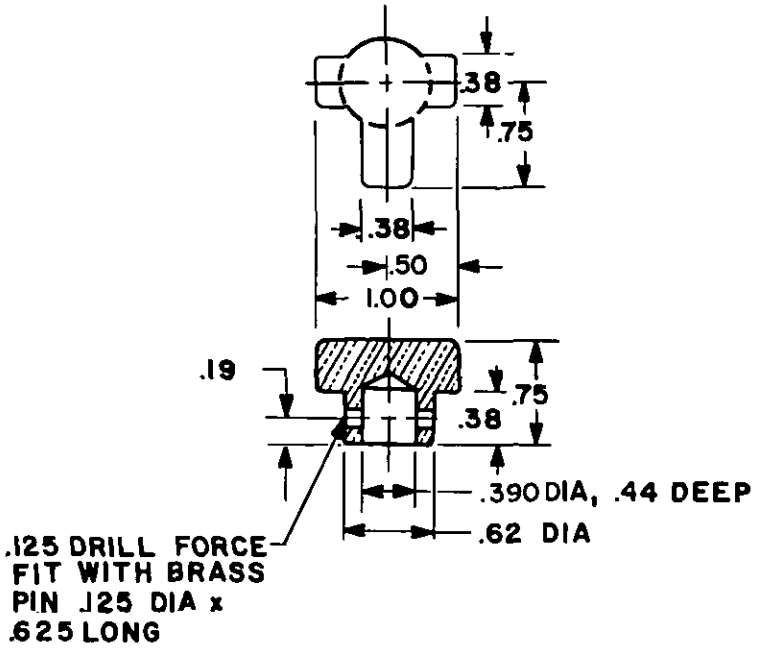


A. T Knob. (06)

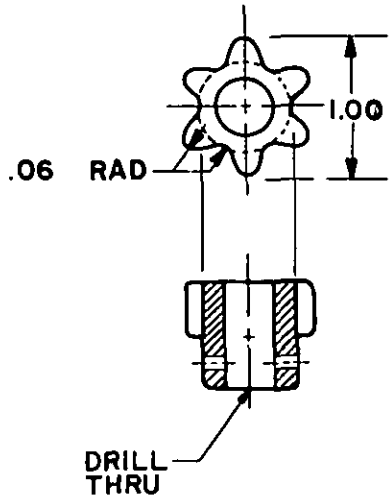

B. Star Knob. (07)
(same as 06, except as shown)

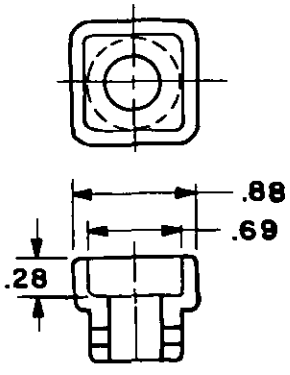

C. Square Knob. (08)
(same as 06, except as shown)

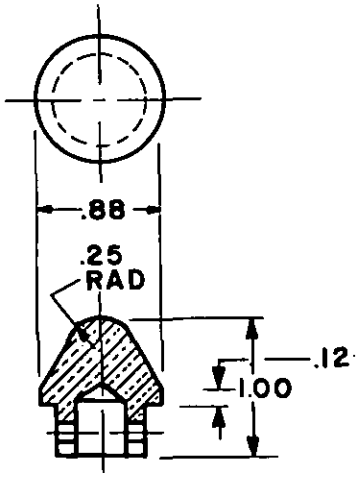


D. Crown Knob. (09)
(same as 06, except as shown)

SH .31310


FIGURE 6. Knobs.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:01Z
Check the source to verify that this is the current version before use.

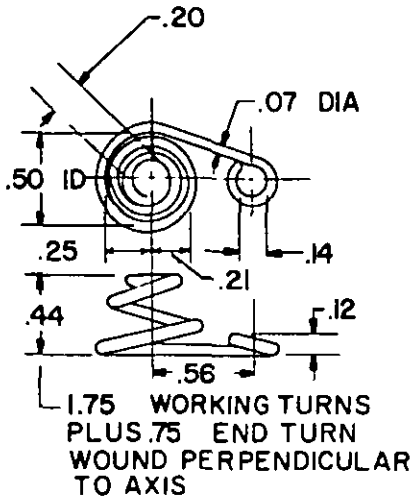

SH 131311

FIGURE 7. Spring. (10)

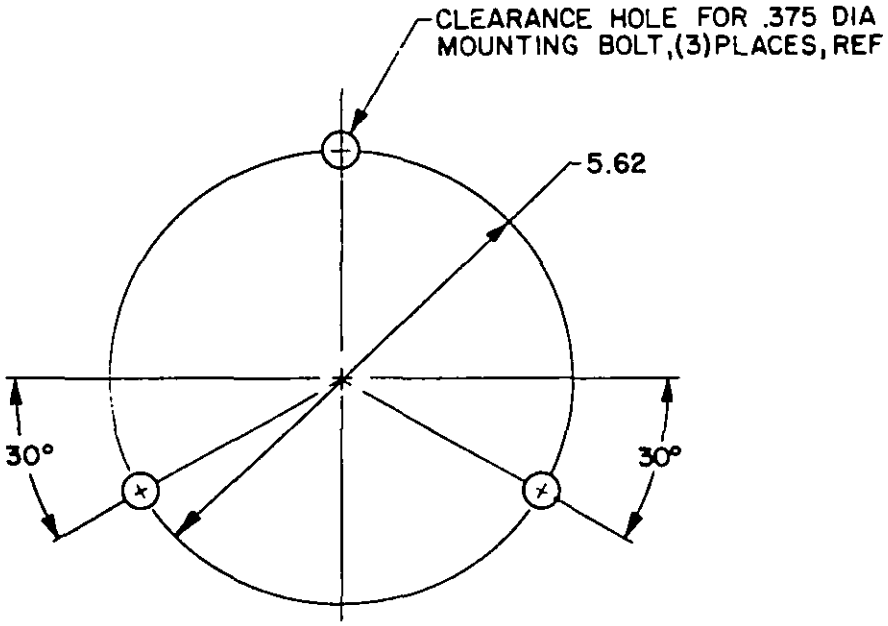


SH 131312

FIGURE 8. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

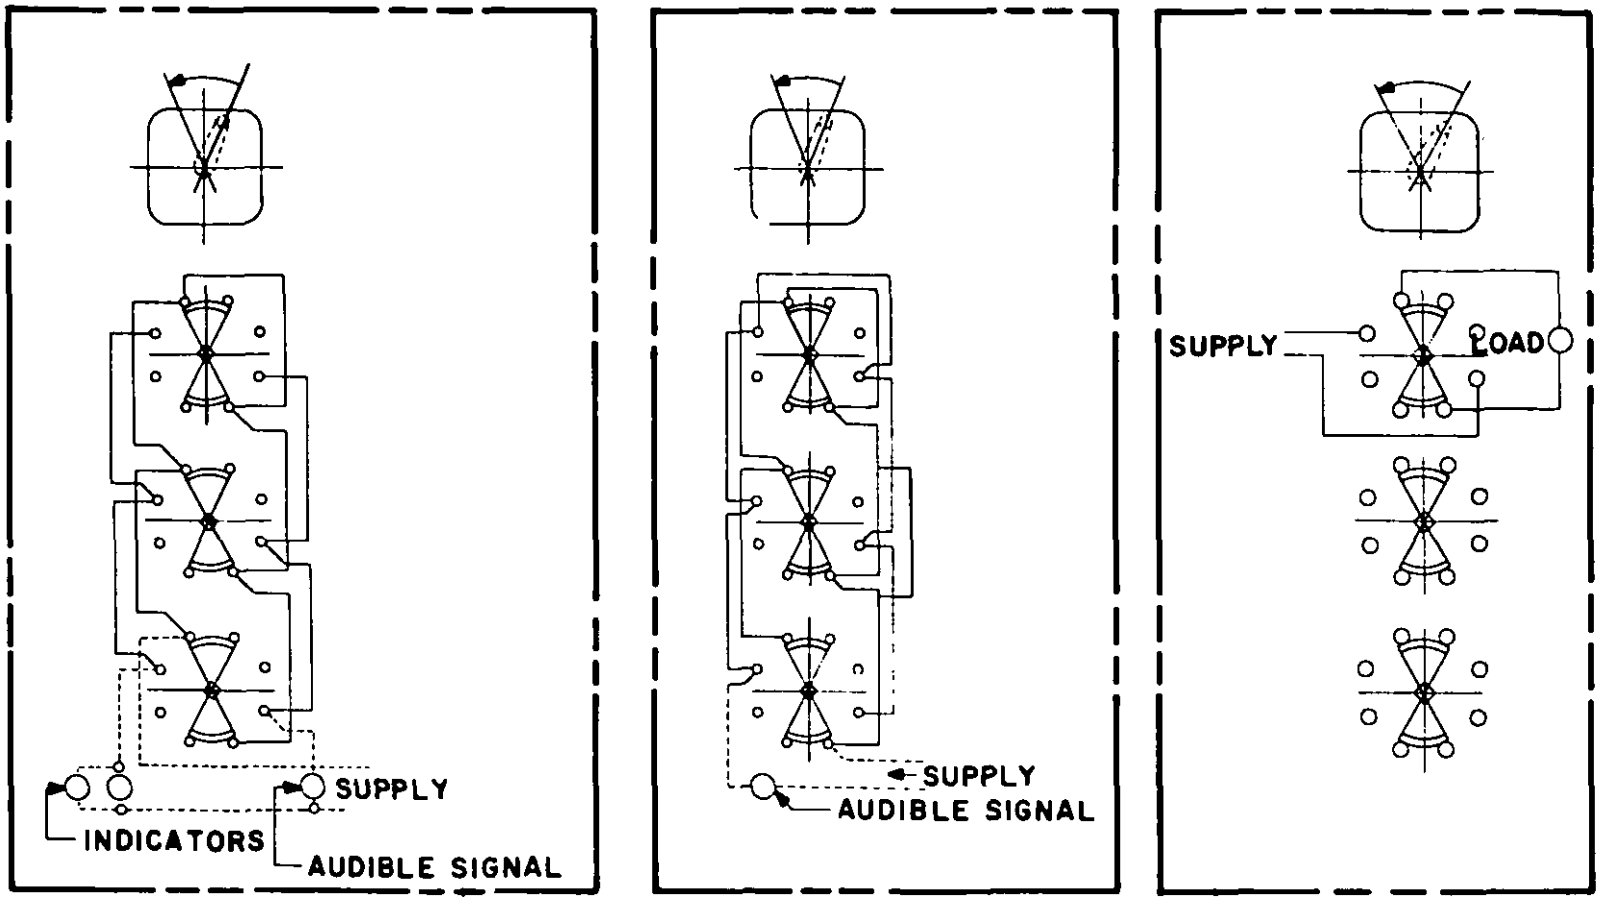


A. (see table III) (12) B. (see table III) (13) C. (see table III) (14)


NOTE: Wiring diagrams are rear view of switch, handle moves "RIGHT ON" (as viewed from front of switch).

SH 131313

FIGURE 9. Wiring diagrams.

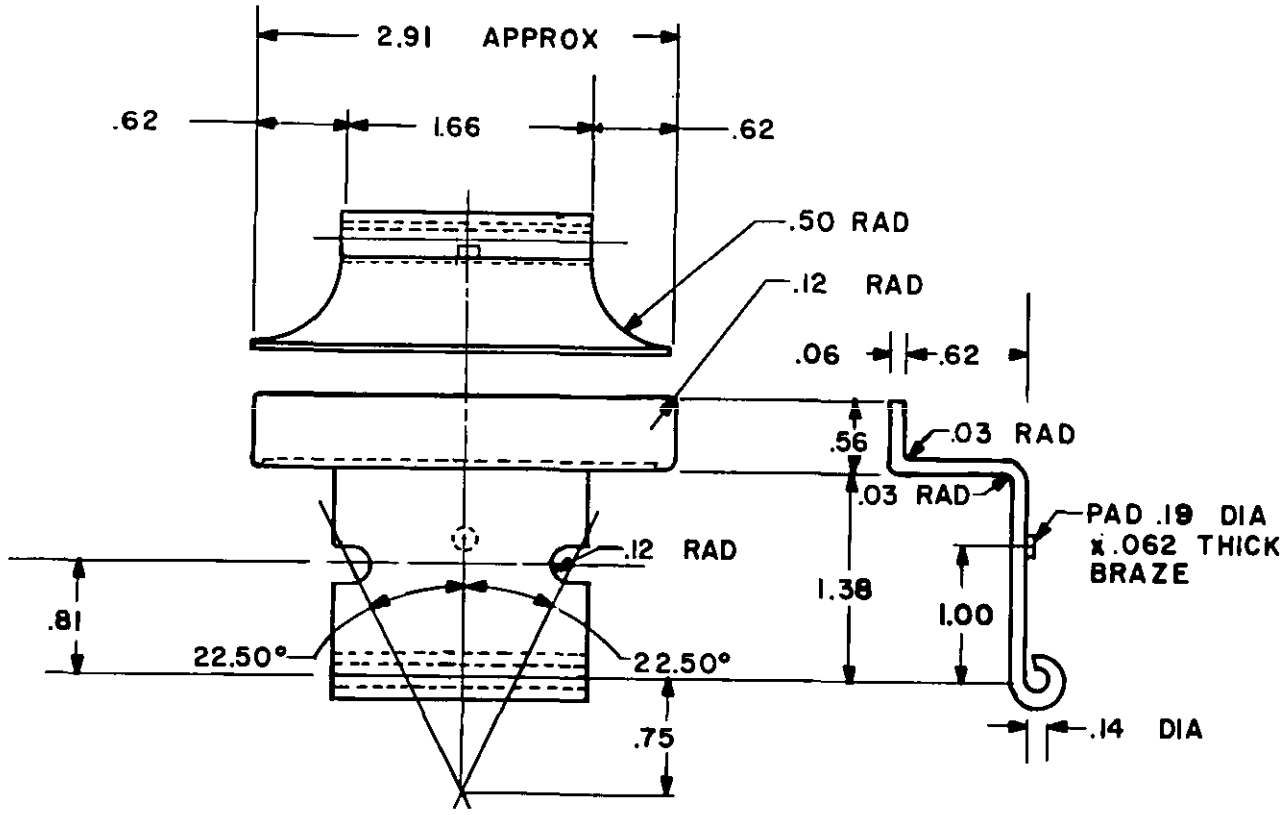


A. Left or right position (16)

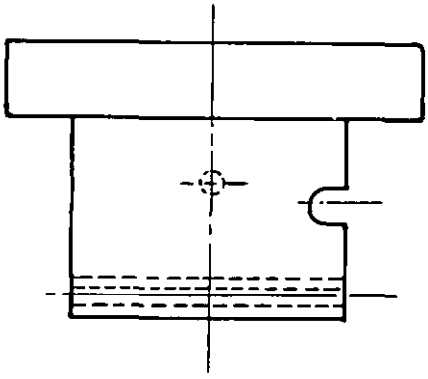

B. Right position (only) (17)

(same as item 16, except as shown)

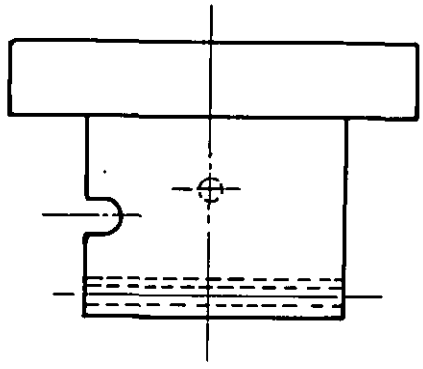


C. Left position (only) (18)

(same as item 16, except as shown)

SH 131314

FIGURE 10. Locking plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

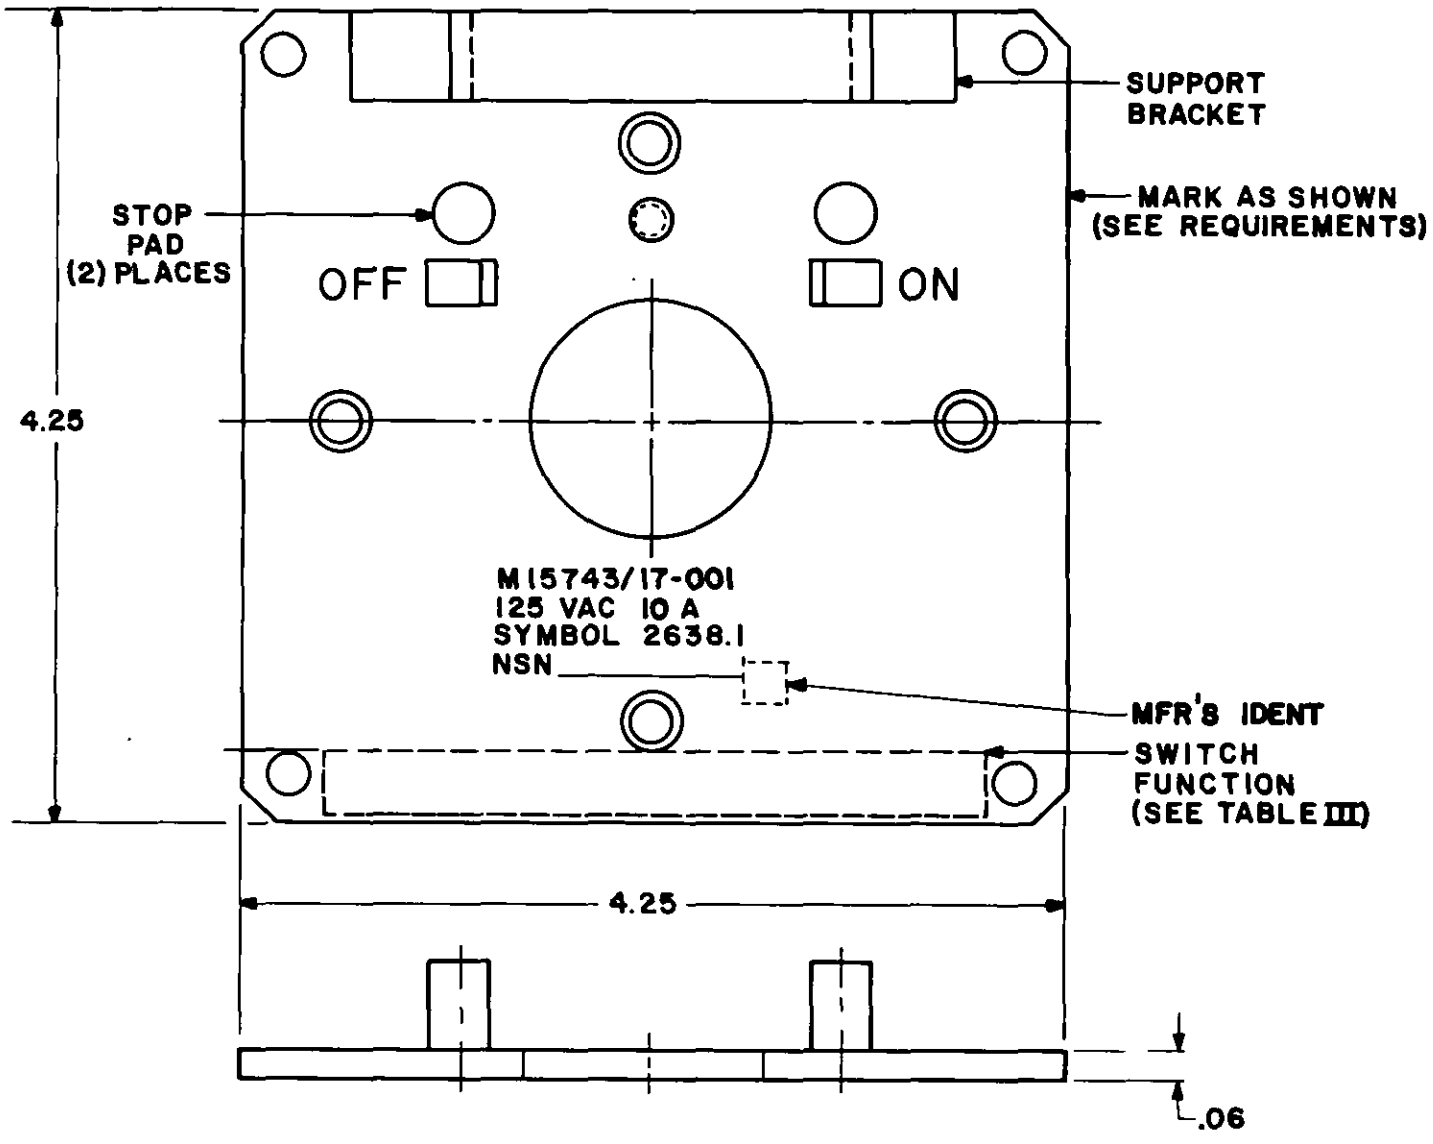

SH 131315

FIGURE 11. Identification plate. (19) through (36)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 10.
Wiring diagrams: See figure 9.
Mounting dimensions: See figure 8.
Degree of enclosure: Submersible (15 feet).
Weight: 4 pounds maximum.
Designation and marking: See figure 10. Unless otherwise specified in the ordering data, switch action and identification marking shall be as shown on figure 11. Switch function marking shall be as shown in table III.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switches specified herein. Parts selection for applicable switch function is given in table III.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	Supersedes 1/			
		Type	Sheets	Revision	Date
M15743/17-001	2638.1	S2JRM3A-2	1-4	H	2/10/80

1/ NAVSEA Drawing 803-74055, in part.

ORDERING DATA:

Acquisition documents should specify the following:

(a) Switch action marking, if other than shown, (see requirements).
(b) Switch function marking required (identification plate item no.). (see table III).
(c) Wiring diagram for identification plate item numbers 19 through 36 (see table III).

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/17-001	Material/specification	Remarks
01	Switch, enclosed (sym 2638.1)	-	-----	See figure 1
02	Enclosure	1	MIL-E-24142/5-002	M24142/5-002 Mod 2/
03	Seal	1		-----
04	Handle	4/ 1	Brass, QQ-B-613	See figure 4
05	Handle body for knobs	4/ 1	Brass, coml	See figure 5

See footnotes at end of table.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no. 1/	Description	Quantity M15743/17-001	Material/specification	Remarks
06	T knob	4/ 1	Brass, coml	See figure 6a
07	Star knob	4/ 1	Brass, coml	See figure 6b
08	Square knob	4/ 1	Brass, coml	See figure 6c
09	Crown knob	4/ 1	Brass, coml	See figure 6d
10	Spring	1	Phosphor bronze, coml	See figure 7
11	Hinge pin	1	Brass, coml	Size as reqd.
12	Wiring diagram	4/ 1	MIL-E-2036	See figure 9a
13	Wiring diagram	4/ 1	MIL-E-2036	See figure 9b
14	Wiring diagram	4/ 1	MIL-E-2036	See figure 9c
15	Switch (type JRM 300)	1	MIL-S-21604/7	----
16	Locking plate (left and right position) 3/	4/ 1	Brass, coml	See figure 10a
17	Locking plate (right position) 3/	4/ 1	Brass, coml	See figure 10b
18	Locking plate (left position) 3/	4/ 1	Brass, coml	See figure 10c
19 thru 36	Identification plate	4/ 1 ea.	Brass, QQ-B-613	See figure 11
37	Hinge angle	2	Brass, coml	See figure 1
38	Stud	1	CRES, Class 306 or 315 of QQ-S-766	

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure to change location of positioning pin and hole (see figures 2 and 3).
3/ Supporting hardware for locking plates shall be brass (commercial) with phosphor bronze (commercial) lockwashers.
4/ See table III for switch function and parts selection.

TABLE III. Switch function and parts selection data.

Switch function 1/ (see figure 11)	Parts selection					
	Color cover & ident plate 2/	Ident plate item no.	Lkg plate item no.	Hdle item no.	Knob item no.	Wrg diag item no.
Blank	-	19	17	04	-	None
Fire room emergency	-	20	18	04	-	12
General alarm	Red #21105 (Surf SH) Yel #23655 (subs)	21	17	04	-	13

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:01Z
Check the source to verify that this is the current version before use.

TABLE III. Switch function and parts selection data. - Continued

Switch function 1/ (see figure 11)	Parts selection					
	Color cover & ident plate 2/	Ident plate item no.	Lkg plate item no.	Hdle item no.	Knob item no.	Wrg diag item no.
Intraturret alarm	-	22	18	04	-	13
Steering emergency	-	23	17	04	-	13
Flight crash	-	24	17	04	-	13
Flight deck warning	-	25	17	04	-	13
Chemical attack	GRN #24260 (Surf SH)	26	16	04	-	13
Heavy machine gun cease firing circuit 4U	-	27	17	04	-	3/
Light machine gun cease Firing circuit 5U	-	28	17	04	-	3/
Collision alarm	Yel #23655 (Surf SH) Red #21105 (Sub)	29	17	05	07	13
Diving alarm	Grn #24260 (Sub)	30	17	05	08	13
Sonar alarm	Yel #23655 (Surf SH)	31	17	04	-	13
Rocker and torpedo warning	-	32	17	04	-	13
Power plant alarm	Wht #27875 (Surf SH) Pink #21668 (Sub)	33	17	05	06	13
Missile jettison alarm	Blu #25102	34	17	05	09	13
Missile emergency alarm	Orn #27246	35	17	05	09	13
Danger I.F.F. destruct	-	36	17	04	-	14

1/ Switch function shall be specified in the ordering data. When not specified, or when enclosed switches are being ordered for stocking in the supply system, the switch function shall be blank (item 19).
2/ Where colors are specified, switch enclosure covers and identification plates shall be painted the color standard number of FED-STD-595.
3/ Wiring diagrams shall be as specified in the ordering data.

Preparing activity:
Navy - SH
(Project 5930-N584-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.