INCH-POUND

MIL-DTL-15743/18A
26 November 2002

SUPERSEDING
MIL-S-15743/18
27 August 1984

DETAIL SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, SIX-POLE, TWO-POSITION, POSITIVE DETENT, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOL 2639.1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-15743.

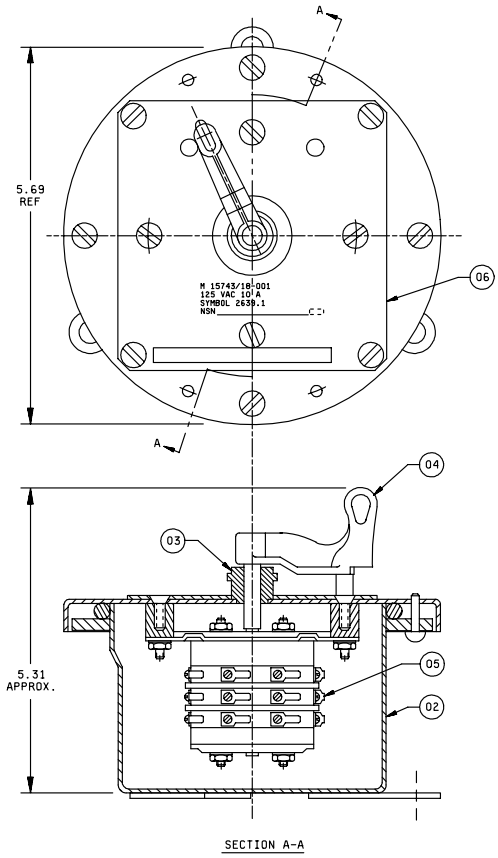


FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

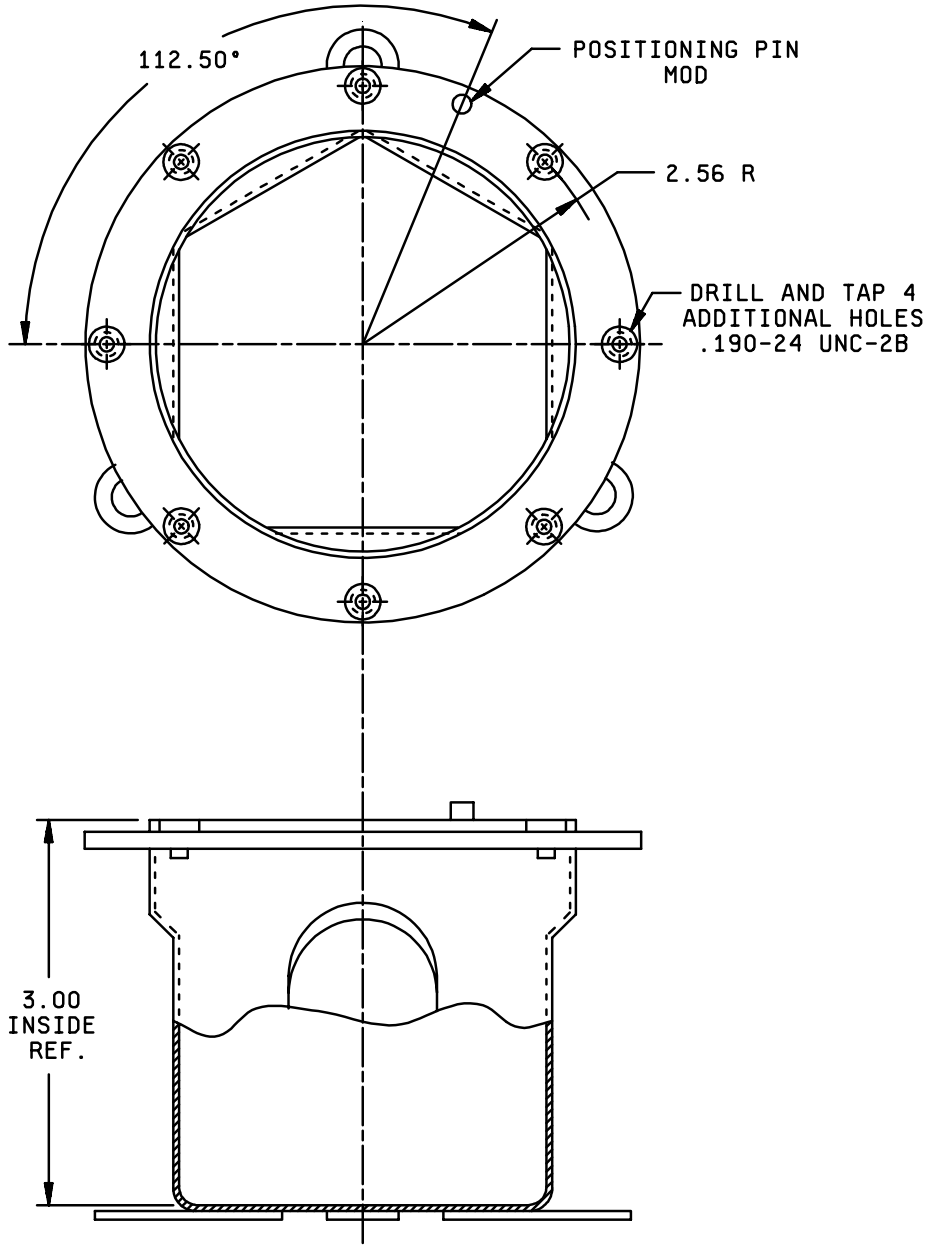


FIGURE 2. Box assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

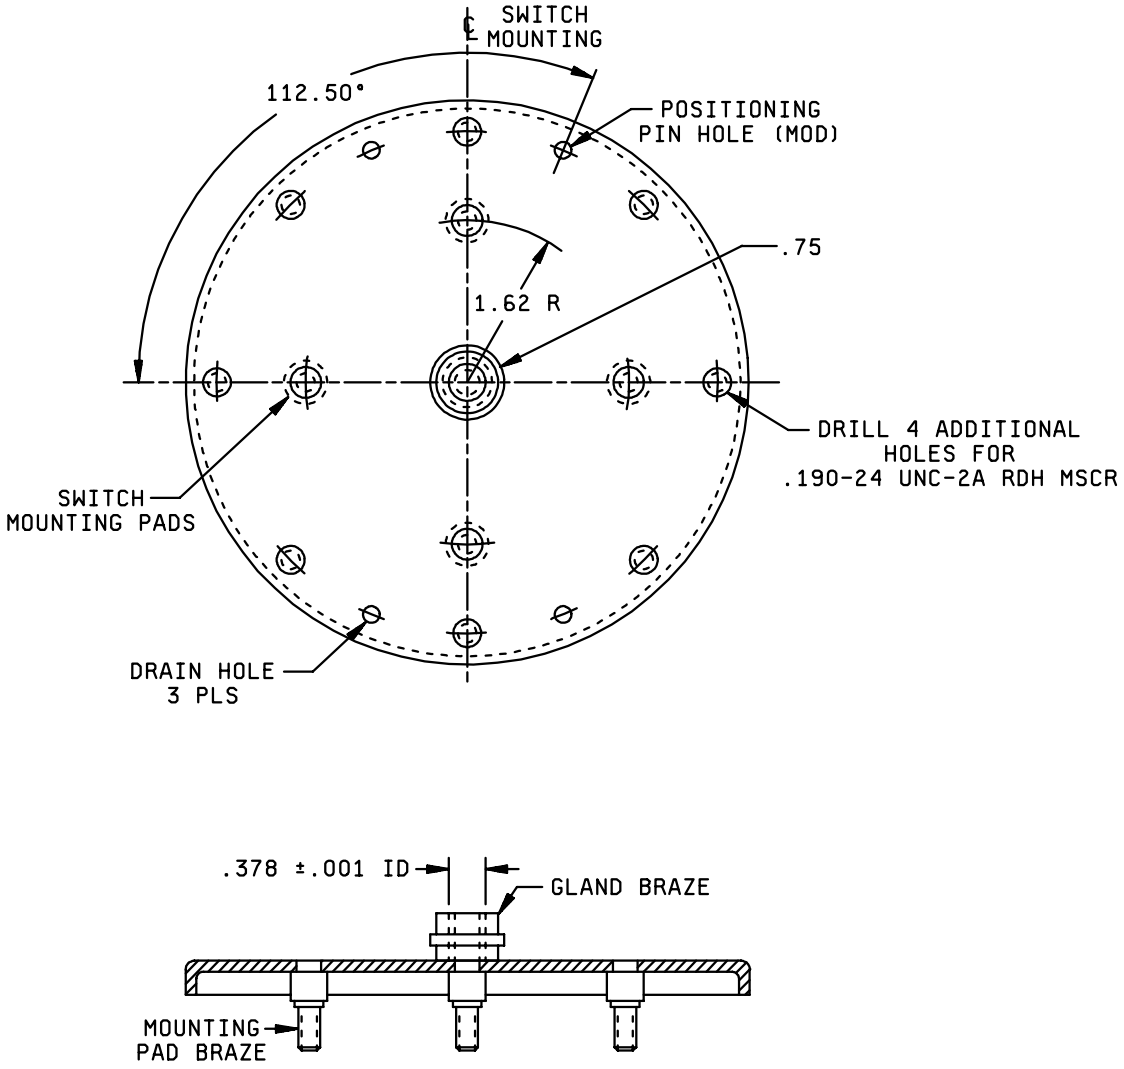


FIGURE 3. Cover assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

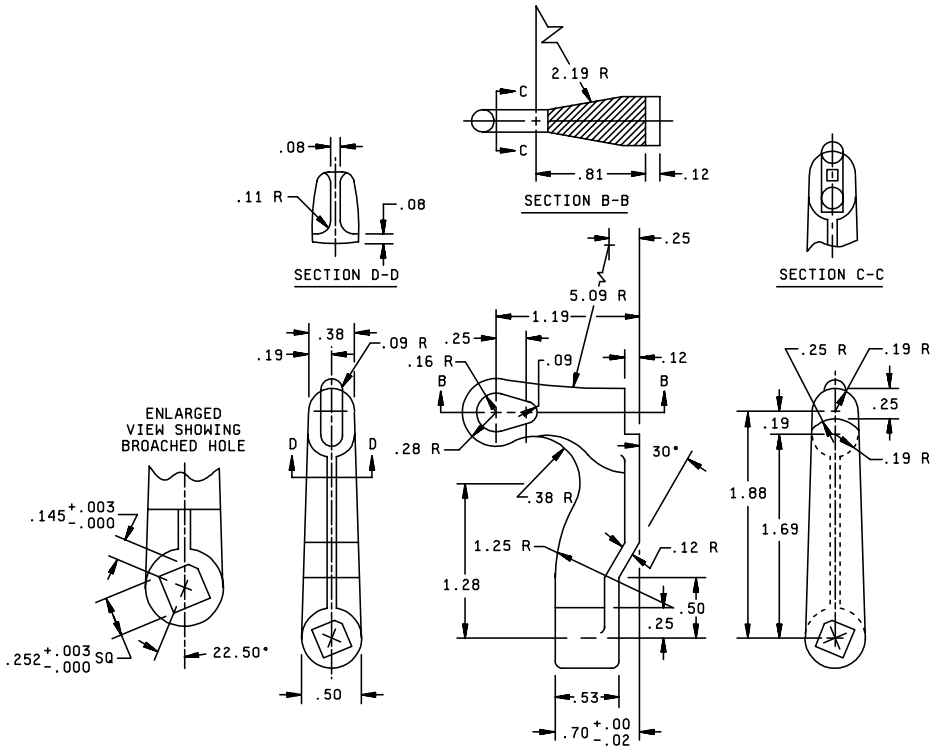


FIGURE 4. Handle. 04

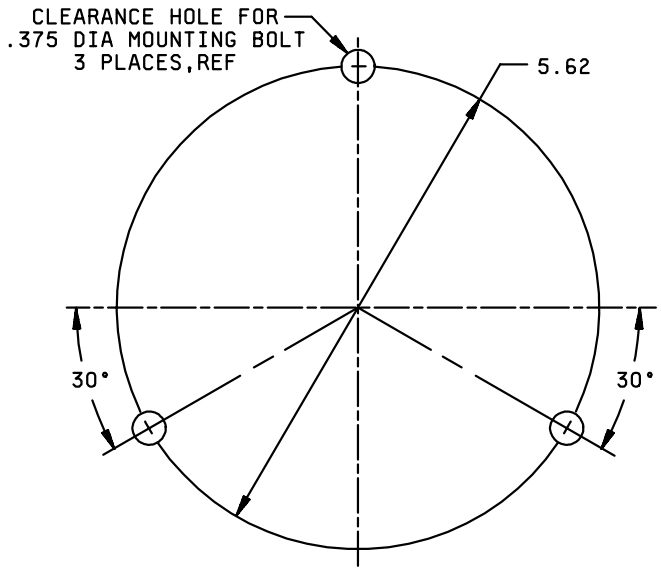


FIGURE 5. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

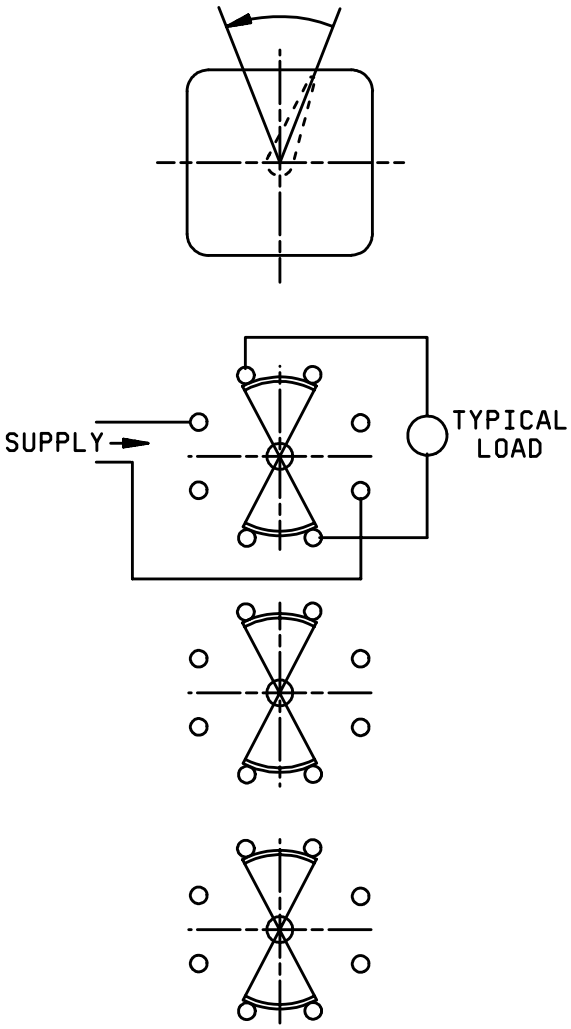


FIGURE 6. Wiring diagram. (05)

(as viewed from back of switch)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

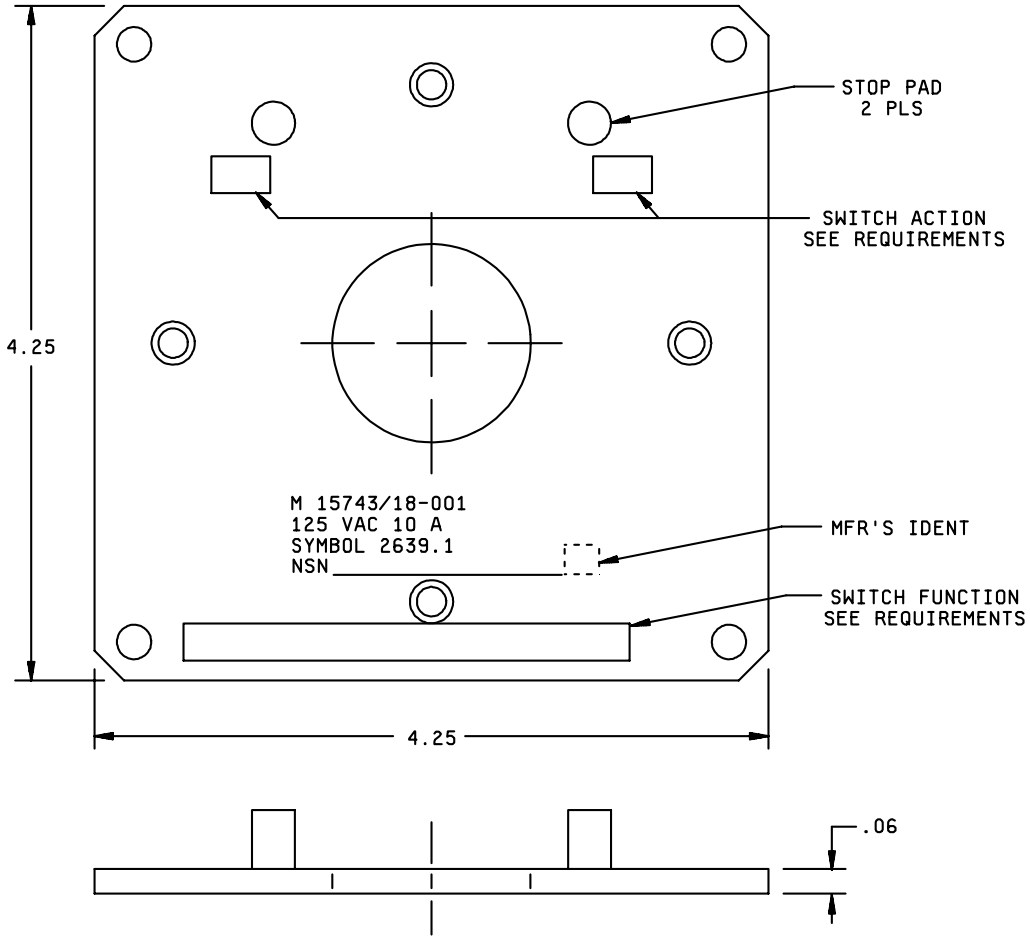


FIGURE 7. Identification plate. 06

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 V ac, 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 4.
Wiring diagram: See figure 6.
Mounting dimensions: See figure 5.
Degree of enclosure: Submersible (15 feet).
Weight: 4 pounds maximum.
Designation and marking: See figures 7.
Identification data shall be as shown on figure 7. Unless otherwise specified in the ordering data, switch action and function marking shall be blank.
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/				
			Type	Unit	Sheet	Revision	Date
M15743/18-001	2639.1	Six-pole, 2 position	S2JR3-2	-	-	H	7/10/80

1/ NAVSEA Drawing 803-74055, in part.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action and function marking, if required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/18-001	Material/ specification	Remarks
01	Switch, enclosed (sym 2639.1)	-	----	See figure 1
02	Enclosure	1	Brass, MIL-E-24142/5	M24142/5-002 Mod 2/
03	O ring seal	1	SAE-AS28775-012	----
04	Handle	1	Brass, ASTM B 36 and ASTM B 121	See figure 4
05	Switch (type JR 304)	1	MIL-S-21604/7	----
06	Identification	1	Brass, ASTM B 36 and ASTM B 121	See figure 7

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure positioning pin and positioning hole location (see figures 2 and 3).

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1742-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.