INCH-POUND
MIL-DTL-15743/18C
27 August 2018
SUPERSEDING
MIL-DTL-15743/18B
12 March 2007

DETAIL SPECIFICATION SHEET

# SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, SIX-POLE, TWO-POSITION, POSITIVE DETENT, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOL 2639.1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification and MIL-DTL-15743.

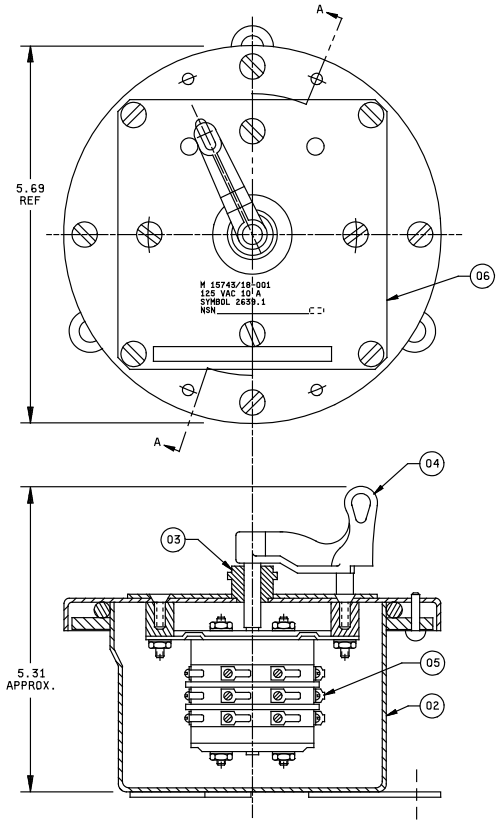



FIGURE 1. Switch, enclosed. 01

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

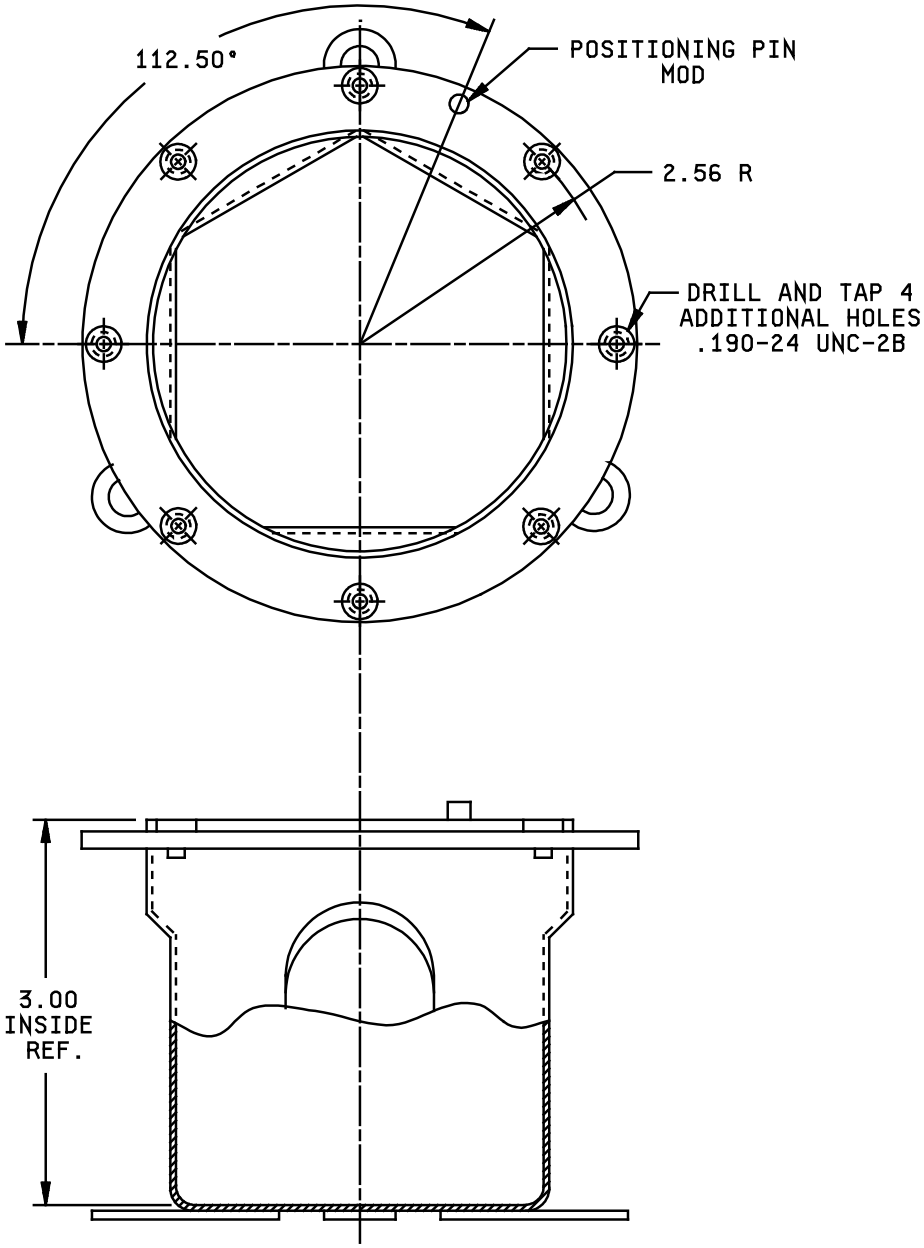



FIGURE 2. Box assembly, (modified).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

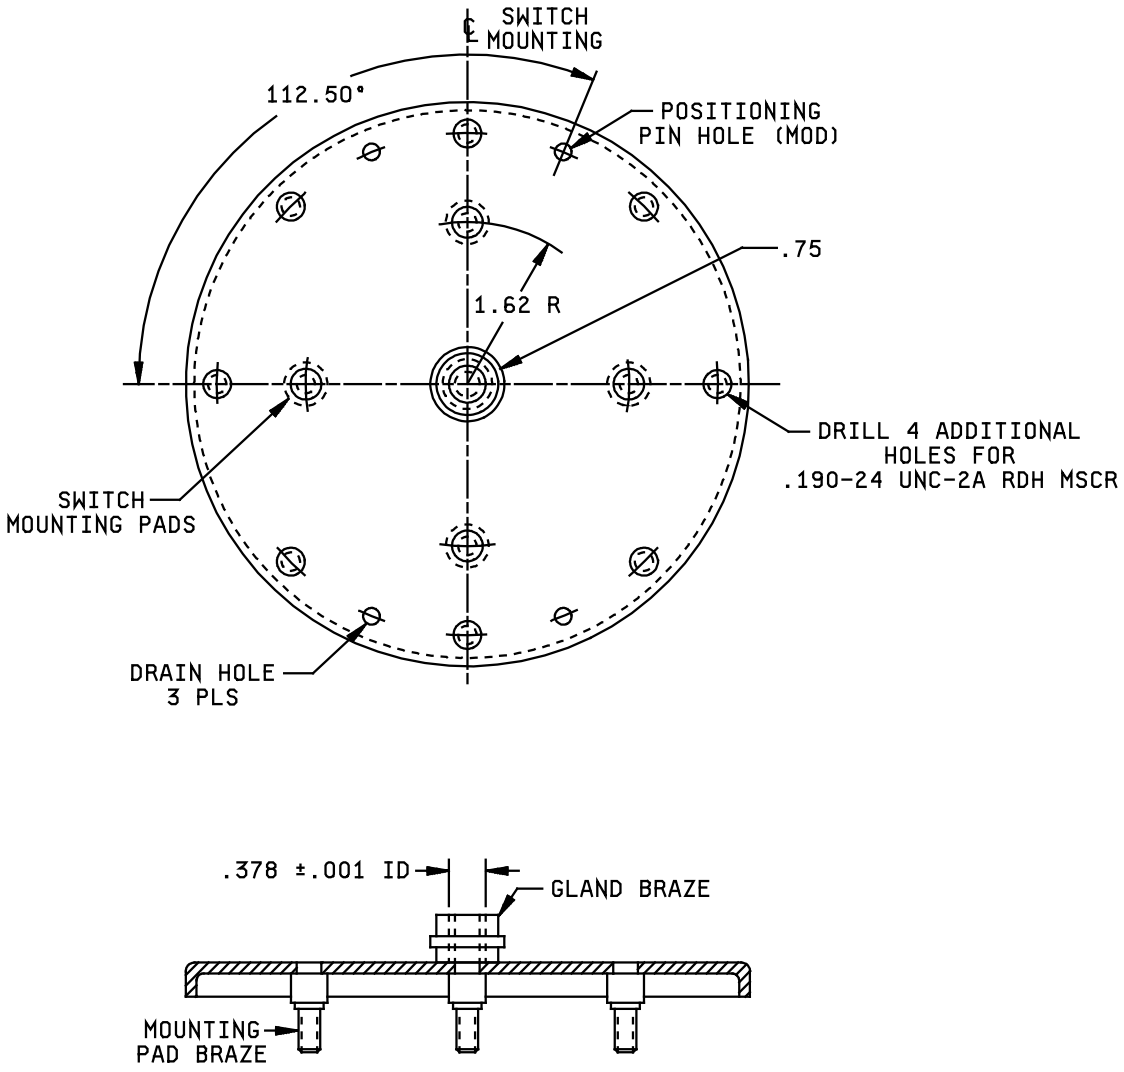



FIGURE 3. Cover assembly, (modified).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

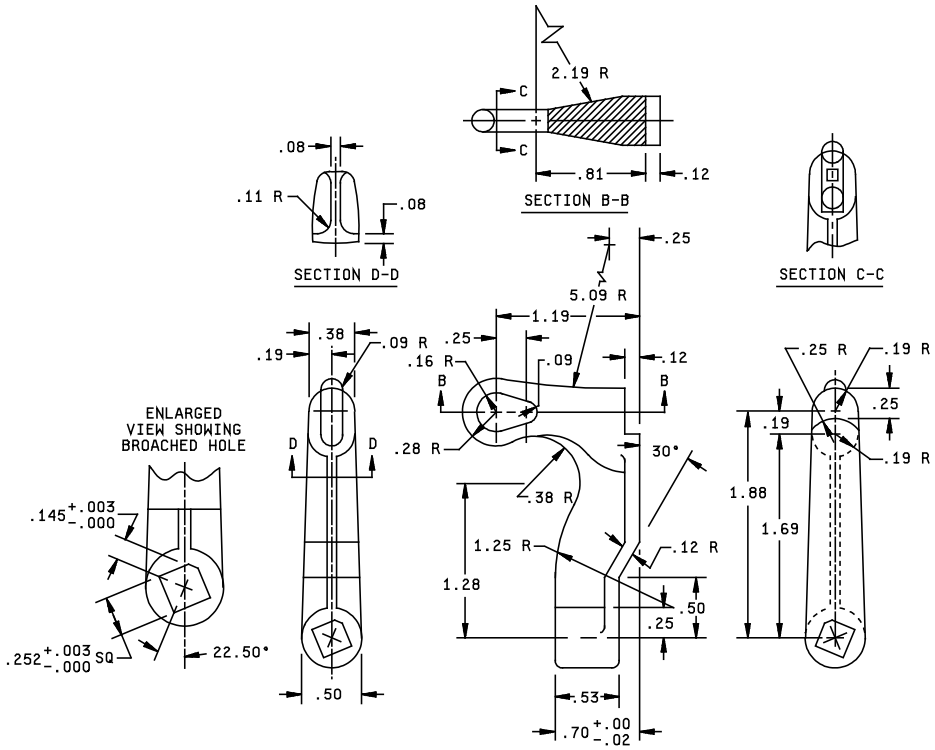



FIGURE 4. Handle. 04

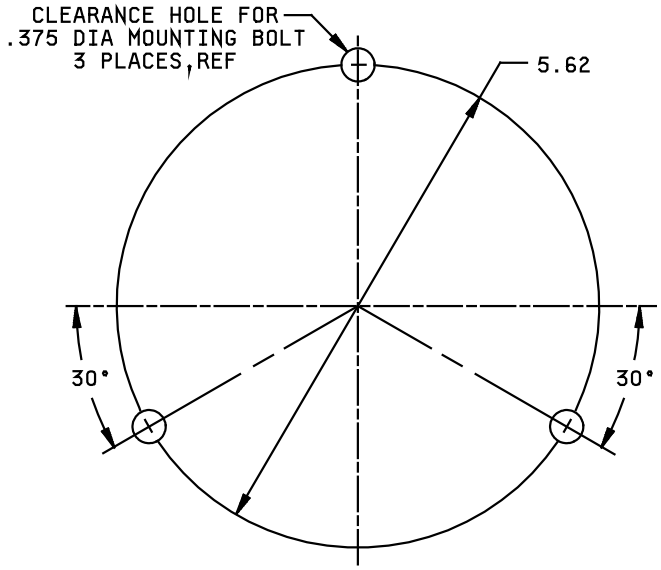



FIGURE 5. Mounting dimensions, ref.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

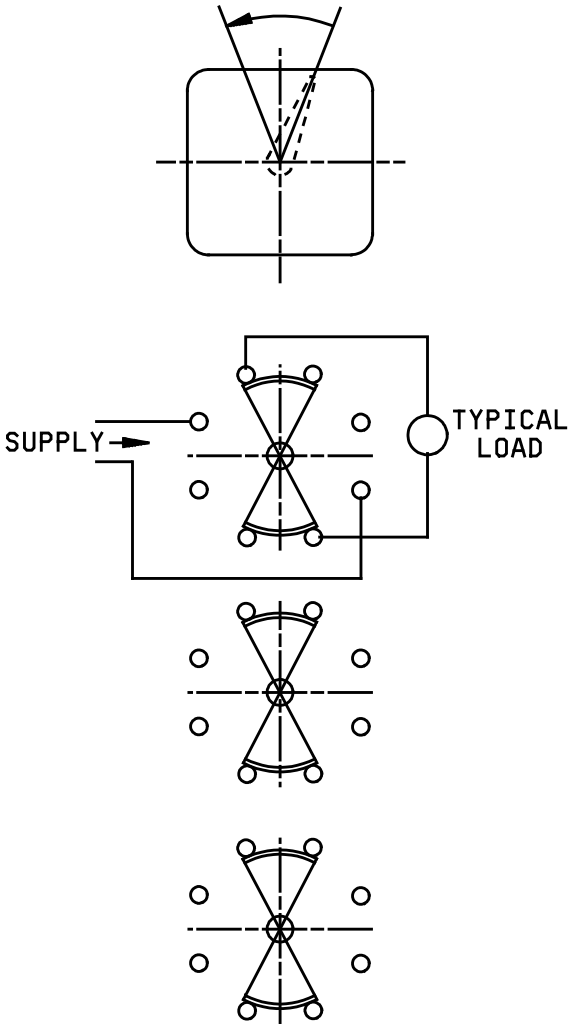



FIGURE 6. Wiring diagram. 05

(as viewed from back of switch)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

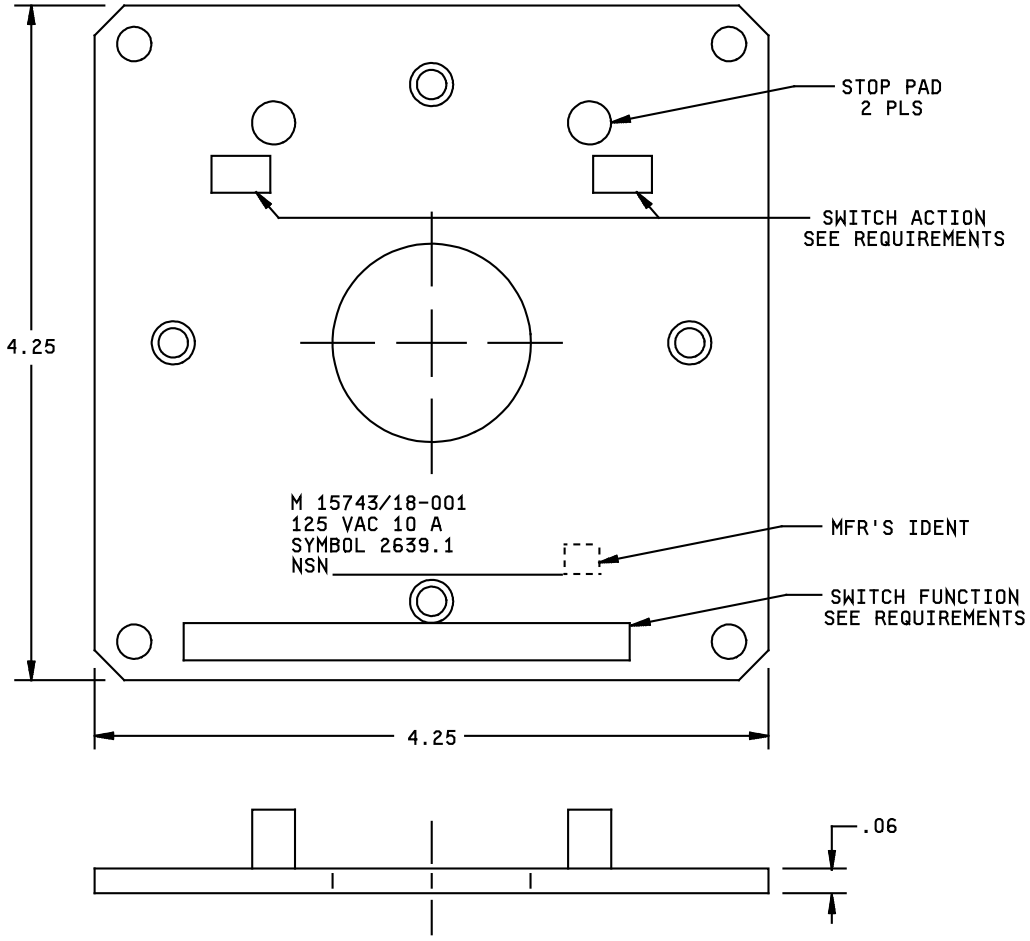



FIGURE 7. Identification plate 06



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 V ac, 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 4.
Wiring diagram: See figure 6.
Mounting dimensions: See figure 5.
Degree of enclosure: Submersible (15 feet).
Weight: 4 pounds maximum.
Designation and marking: See figures 7.
Identification data shall be as shown on figure 7. Unless otherwise specified in the ordering data, switch action and function marking shall be blank.
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

| Military part no. | Symbol no. | No. of poles and switching characteristics | Supersedes 1/ | | |
|---|---|---|---|---|---|
| | | | Type | Revision | Date |
| M15743/18-001 | 2639.1 | Six-pole, 2 position | S2JR3-2 | H | 7/10/80 |

1/ From NAVSEA Drawing 803-74055.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action and function marking, if required.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

| Item no. 1/ | Description | Quantity M15743/ 18-001 | Material/ specification | Remarks |
|---|---|---|---|---|
| 01 | Switch, enclosed (sym 2639.1) | - | ---- | See figure 1 |
| 02 | Enclosure | 1 | Brass, MIL-E-24142/5 | M24142/5-002 Mod 2/ |
| 03 | O ring seal | 1 | SAE-AS28775-012 3/ | ---- |
| 04 | Handle | 1 | Brass, ASTM-B36/B36M and ASTM-B121/B121M | See figure 4 |
| 05 | Switch (type JR 304) | 1 | MIL-DTL-21604/7 | ---- |
| 06 | Identification | 1 | Brass, ASTM-B36/B36M and ASTM-B121/B121M | See figure 7 |

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure positioning pin and positioning hole location (see figures 2 and 3).
3/ SAE-AS28775-010 details are found in SAE-AS28775.

Referenced documents. In addition to MIL-DTL-15743, this document references the following:

| | | |
|---|---|---|
| MIL-DTL-21604/7 | ASTM-B36/B36M | NAVSEA DWG 803-74055 |
| MIL-E-24142/5 | ASTM-B121/B121M | SAE-AS28775 |

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2018-029)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.