INCH-POUND
MIL-S-15743/8A(SH)
22 November 1993
SUPERSEDING
MIL-S-15743/8(SH)
27 August 1984

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 500 VOLTS ALTERNATING CURRENT/250 VOLTS DIRECT CURRENT, 30 AMPERE, SYMBOLS 838.1 (DPDT), 840.1 (DPDT), AND 851 (TPST)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15743.

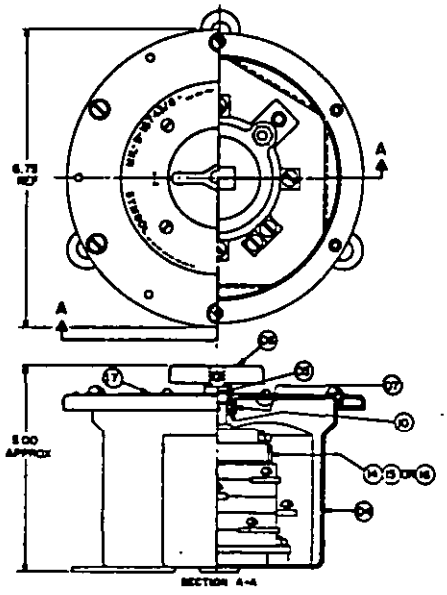


FIGURE 1. Switch, enclosed (typical). (01) (02) (03)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

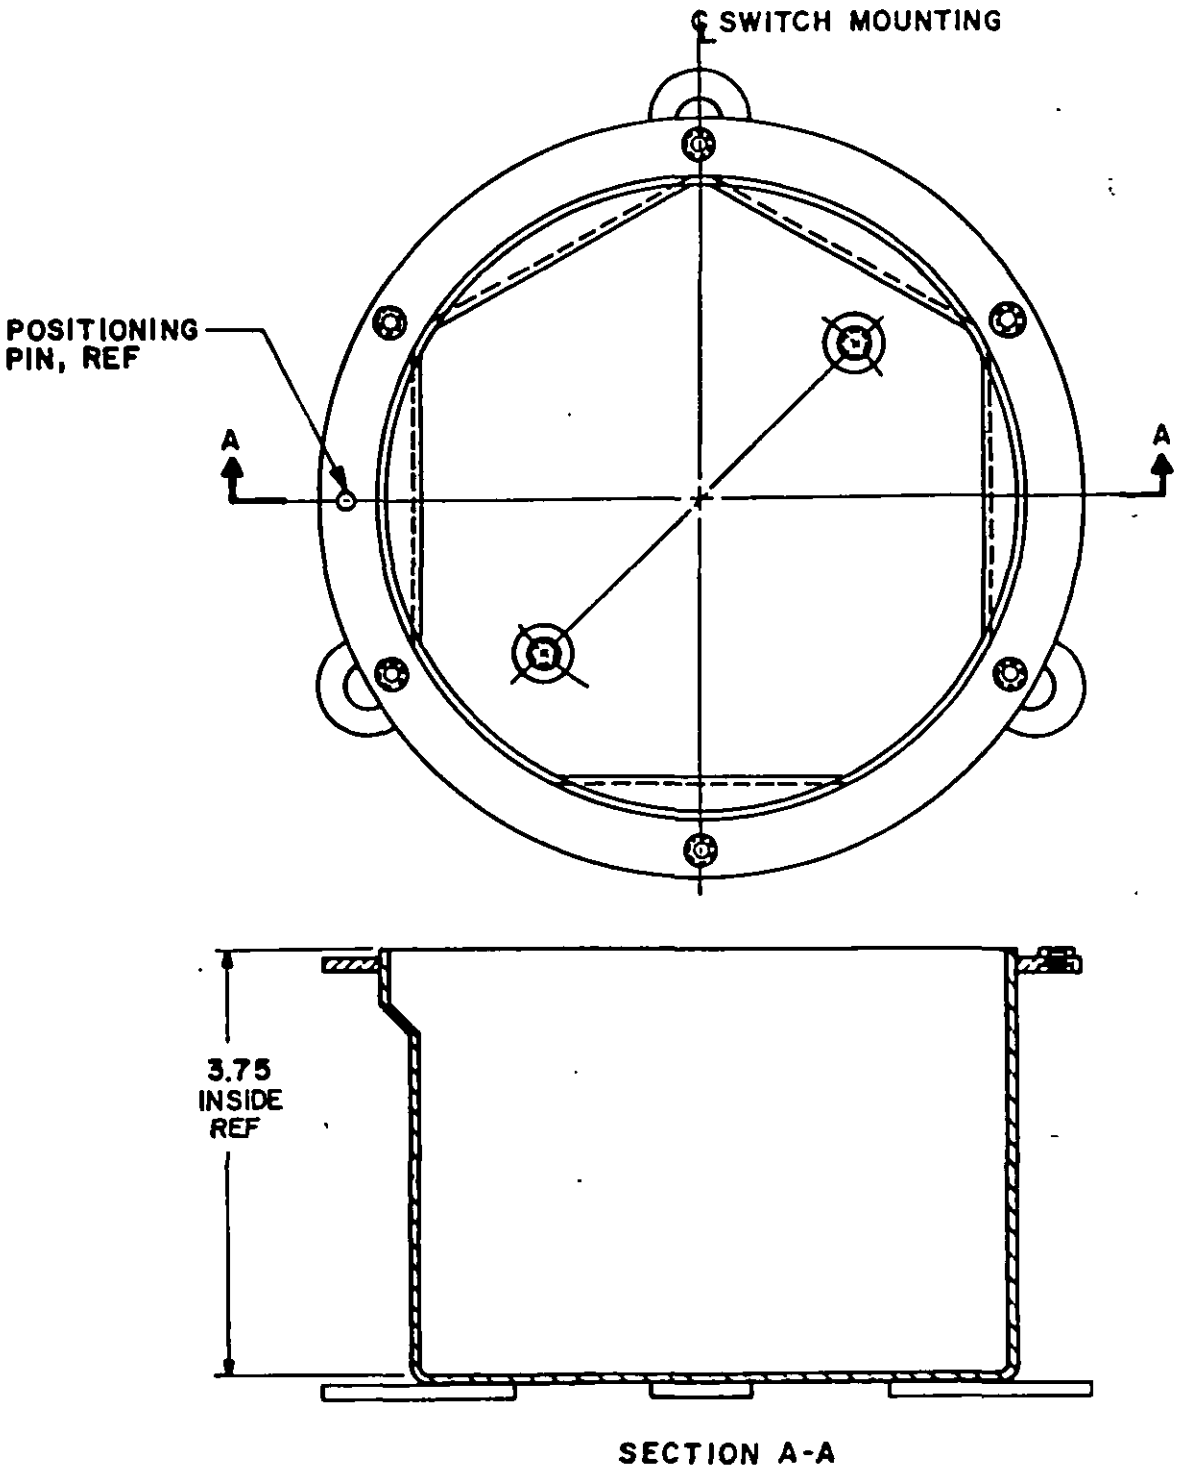


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

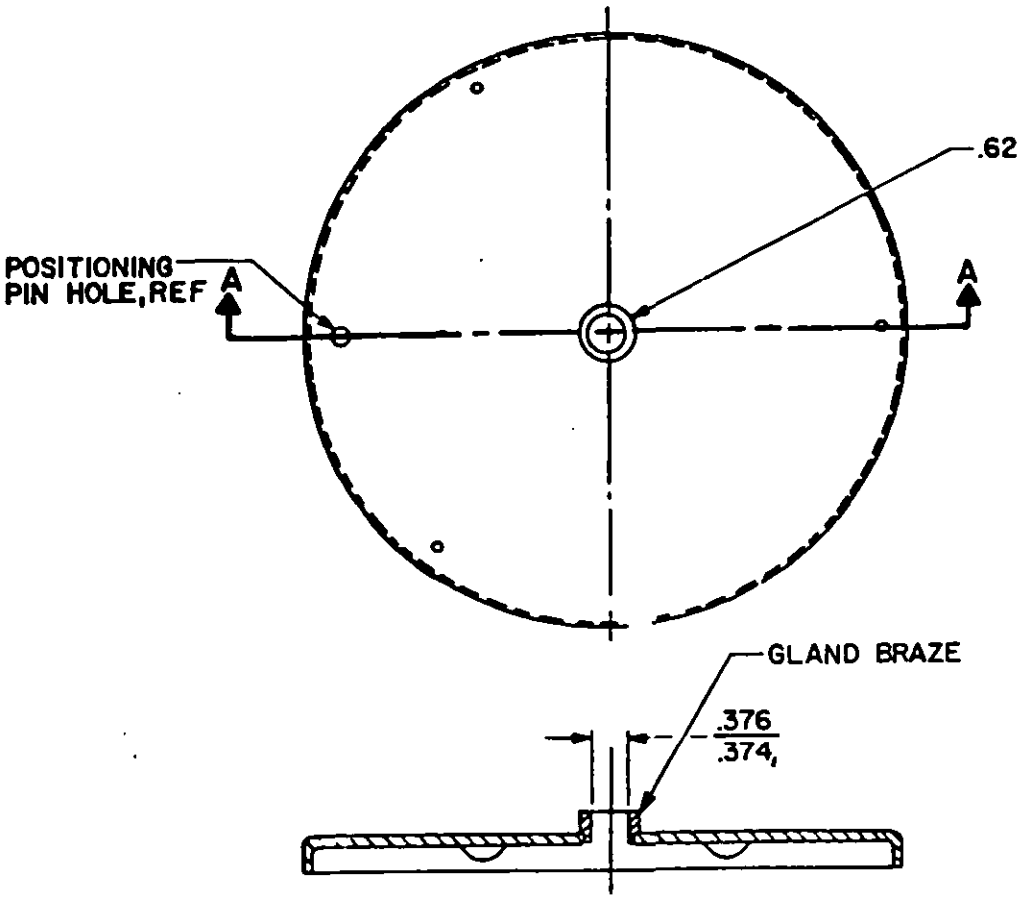


FIGURE 3. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

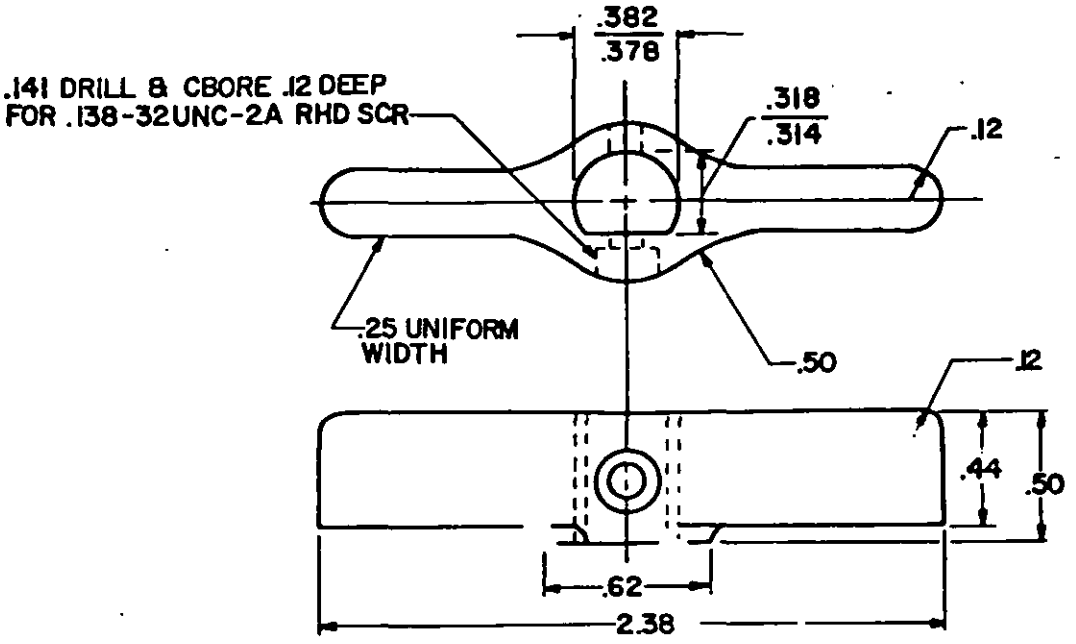


FIGURE 4. Handle. (06)

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:58Z
Check the source to verify that this is the current version before use.

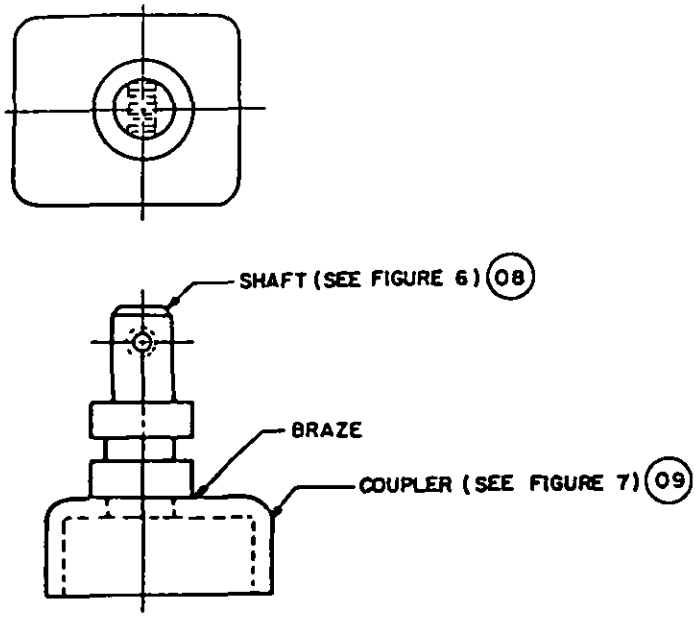


FIGURE 5. Shaft assembly. 07

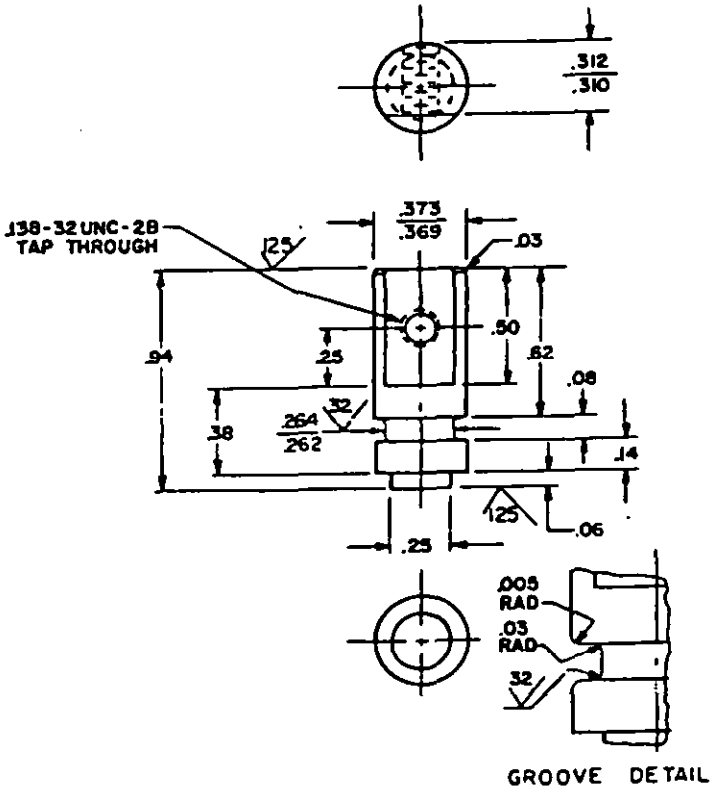


FIGURE 6. Shaft. 08

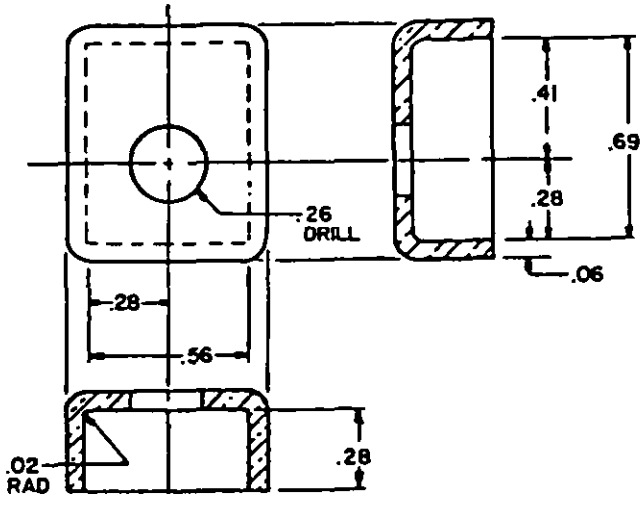


FIGURE 7. Coupler. 09

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

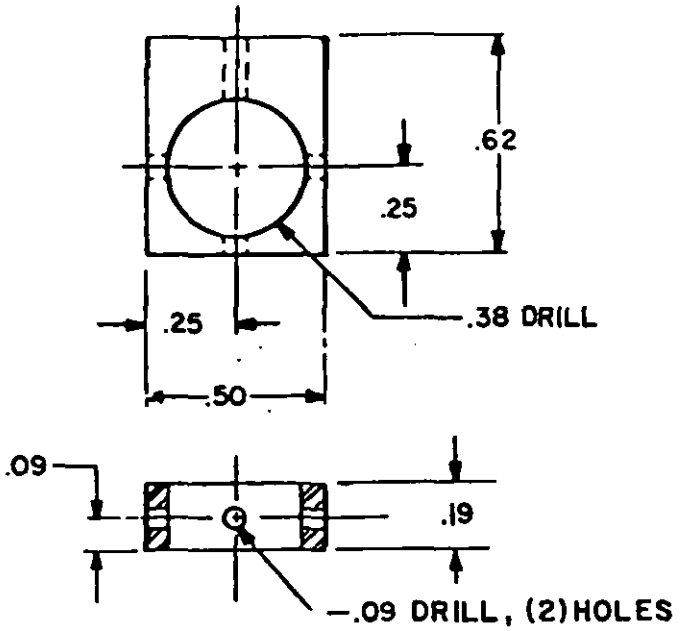


FIGURE 8. Coupler plate. (10)


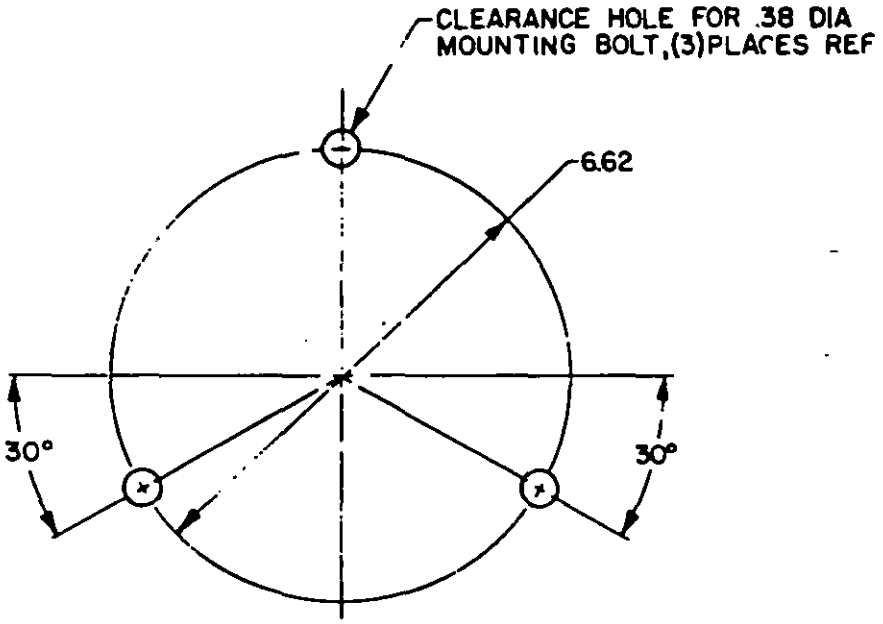


FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

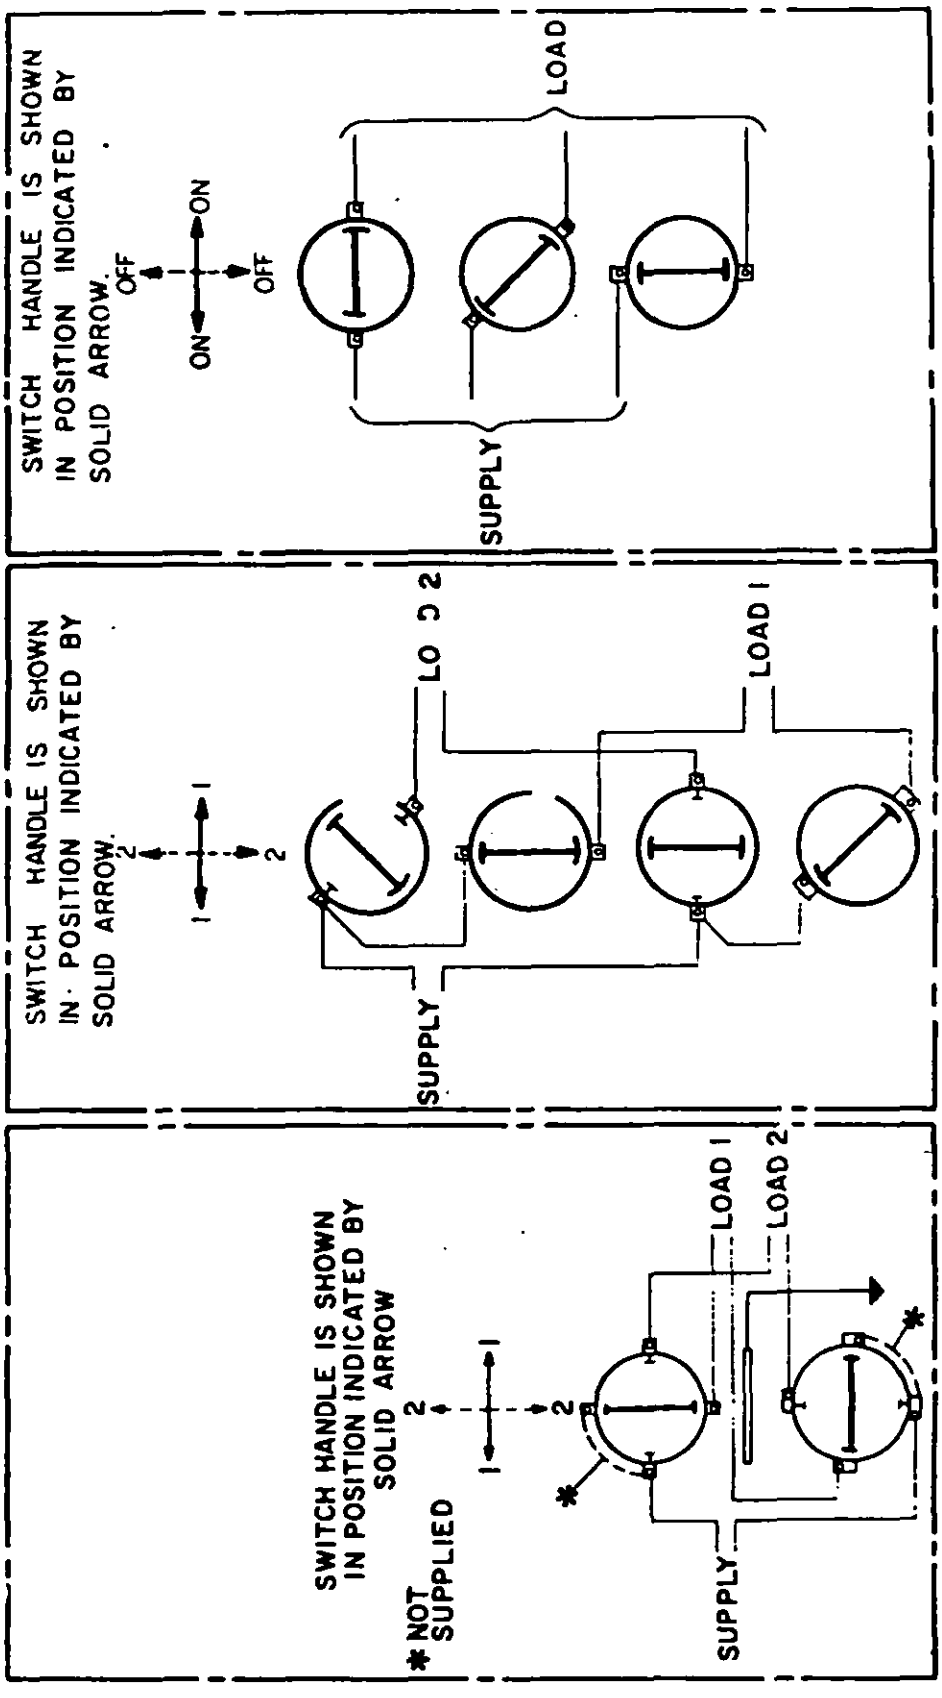

A. Symbol 838.1 (11) B. Symbol 840.1 (12) C. Symbol 851 (13)

FIGURE 10. Wiring diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

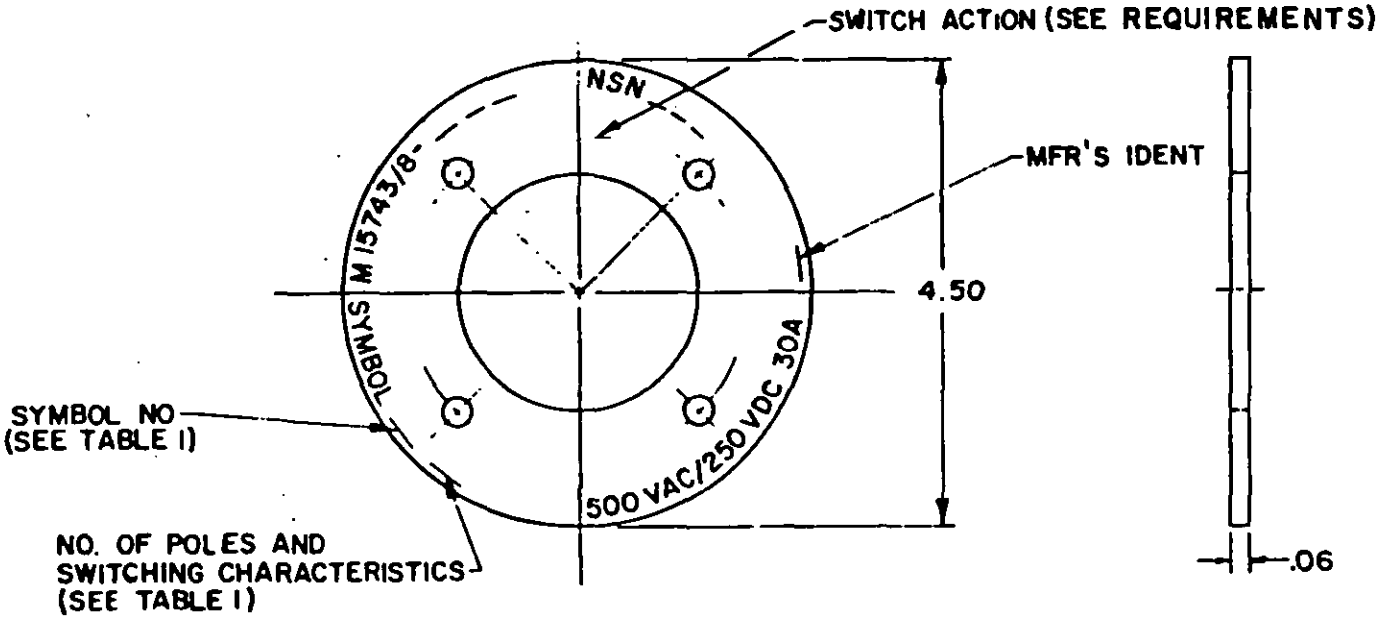


FIGURE 11. Identification plate. (17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:
Electrical rating: 500 Va.c., 60 Hz, 250 Vd.c., 0-30 ampere.
Dimensions and configuration: See figures 1 through 9.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Submersible (15 feet).
Weight: 5 pounds maximum.
Designation and marking: See figure 10 and 11.
Identification data shall be as shown on figure 11. Unless otherwise specified in the ordering data, switch action marking shall be blank.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:
Military part numbers and general information are as shown in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/8-001	838.1	DPDT	3SR2C4A-2	2	3
M15743/8-002	840.1	DPDT	3SR2C4-2	2	2
M15743/8-003	851	TPST	3SR3A4-2	6	7

1/ NAVSEA Drawing 9000-S6202-74207, in part.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action marking, if different from that shown, (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/8-			Material/specification	Remarks
		001	002	003		
01	Switch, enclosed (sym 838.1)	-				See figure 1
02	Switch, enclosed (sym 840.1)		-			See figure 1
03	Switch, enclosed (sym 851)			-		See figure 1
04	Enclosure	1	1	1	MIL-E-24142/5 (modified)	See figure 2 & 3 M24142/5-003
05	O-ring	1	1	1	MS28775-010	----
06	Handle	1	1	1	Copper alloy ASTM B 584	See figure 4
07	Shaft assembly	1	1	1	----	See figure 5
08	Shaft	1	1	1	Ni-Cu alloy of QQ-N-281	See figure 6
09	Coupler	1	1	1	Brass, ASTM B 36, ASTM B 121	See figure 7
10	Coupler plate	1	1	1	CRES, class 304 or 316 of QQ-S-766	See figure 8
11	Wiring diagram	1			MIL-E-2036	See figure 10a
12	Wiring diagram		1		MIL-E-2036	See figure 10b
13	Wiring diagram			1	MIL-E-2036	See figure 10c
14	Switch (type 3SR2C4A)	1			MIL-S-15291/7	M15291/7-013
15	Switch (type 3SR2C4)		1		MIL-S-15291/7	M15291/7-012
16	Switch (type 3SR3A4)			1	MIL-S-15291/7	M15291/7-005
17	Identification plate	1	1	1	ASTM B 36, ASTM B 121	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5930-N746-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.