INCH-POUND
MIL-DTL-15743/8E
6 November 2023
SUPERSEDING
MIL-DTL-15743/8D
27 August 2018

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 500 VOLTS ALTERNATING CURRENT/250 VOLTS DIRECT CURRENT, 30 AMPERE, SYMBOLS 838.1 (DPDT), 840.1 (DPDT), AND 851 (TPST)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-15743.

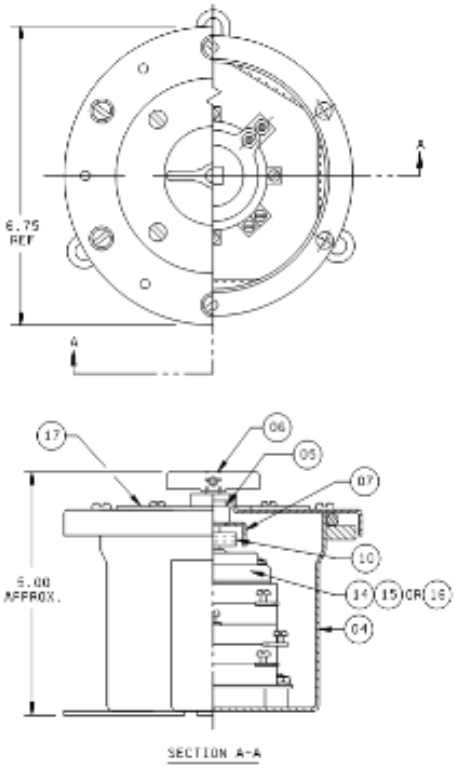


FIGURE 1. Switch, enclosed (typical). 01 02 03

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.


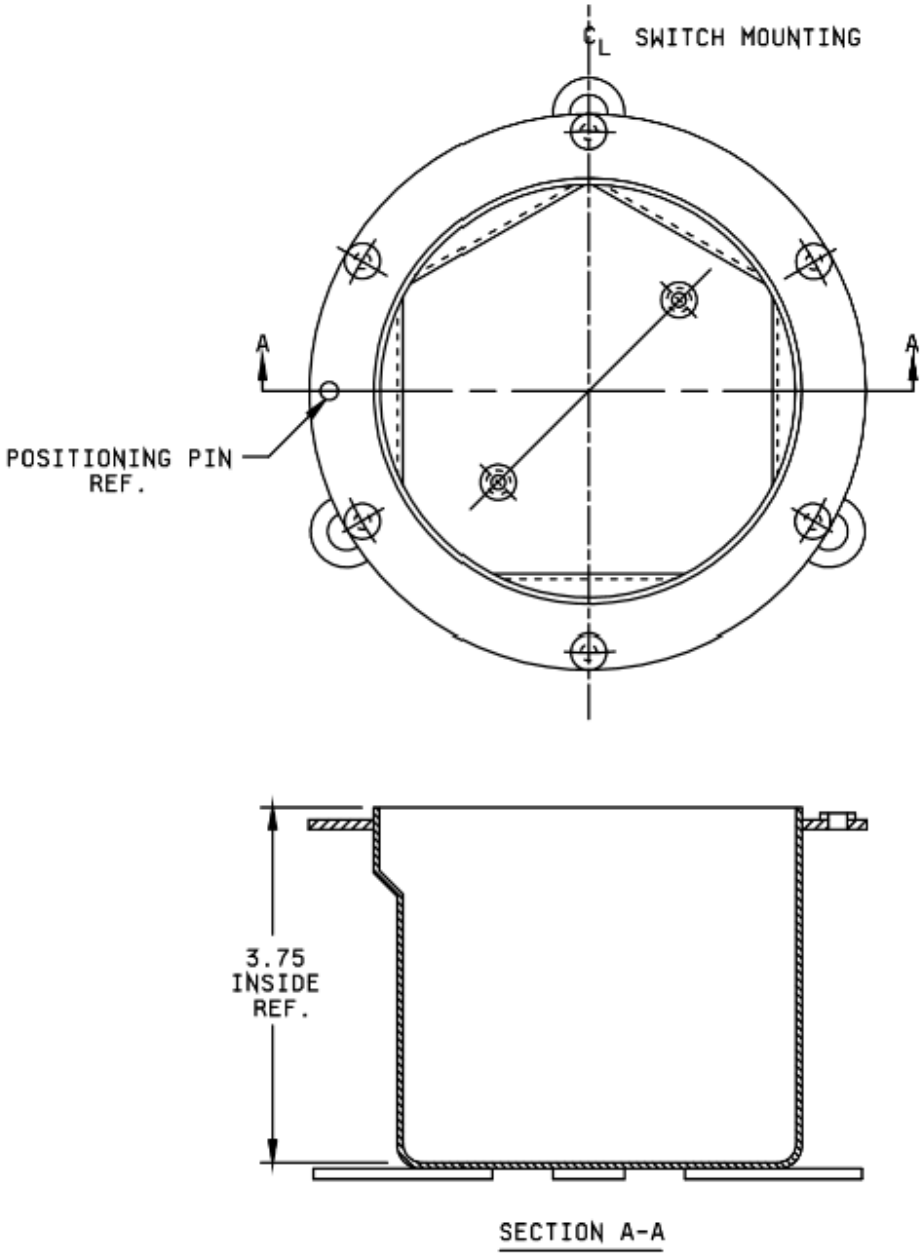


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

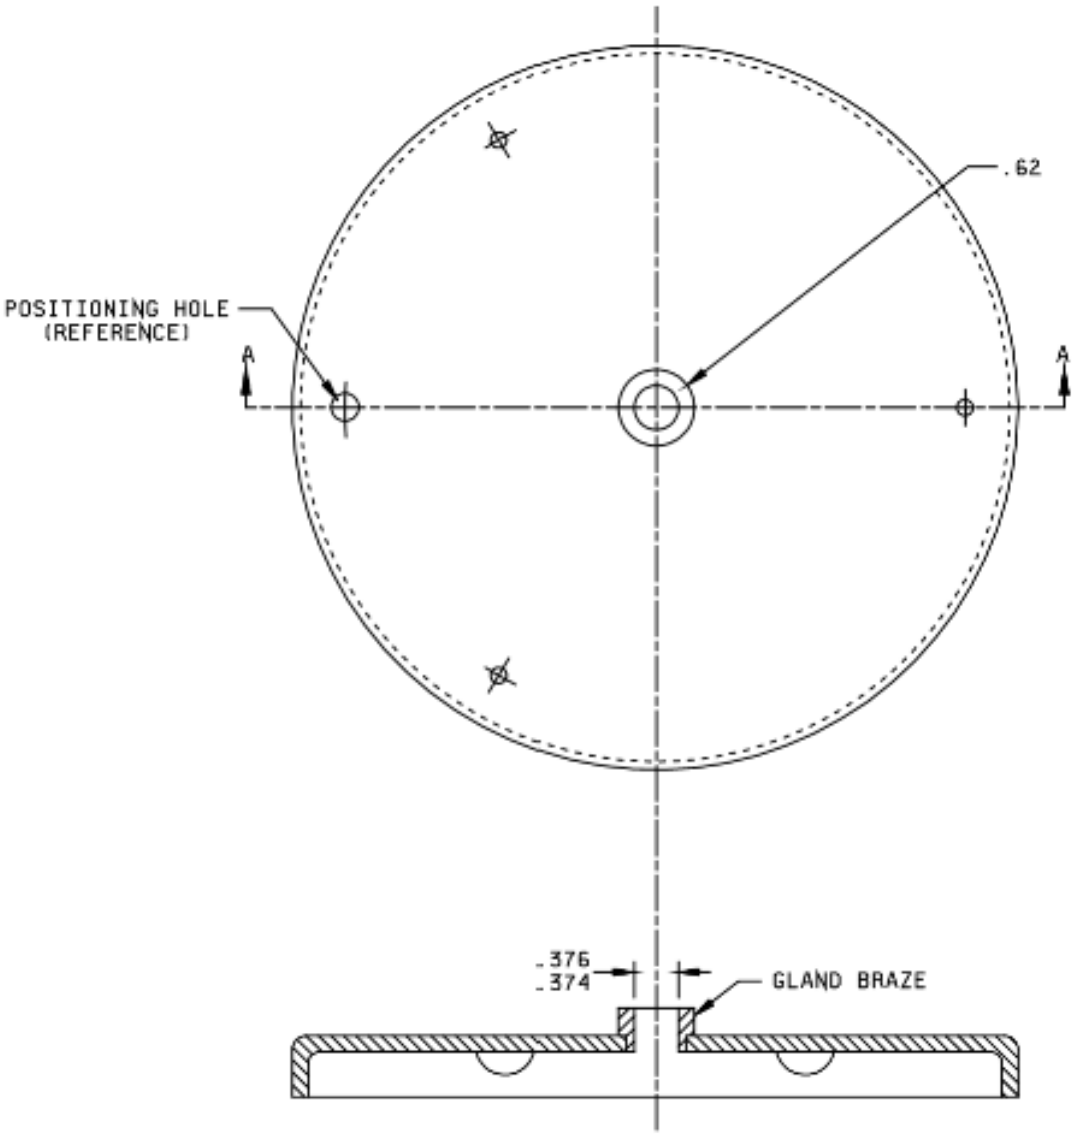

SECTION A-A

FIGURE 3. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

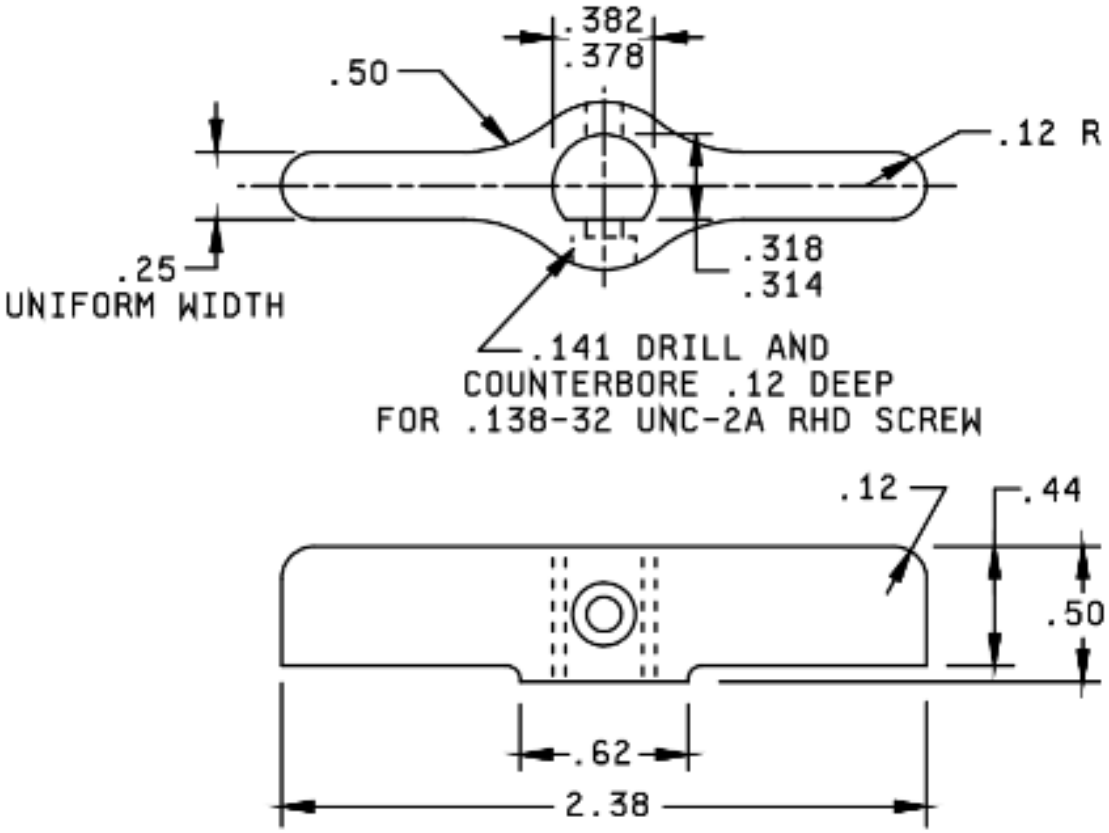


FIGURE 4. Handle. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

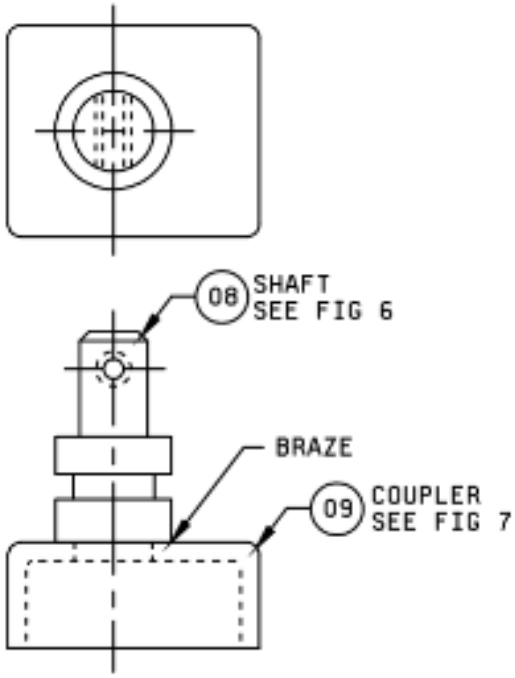


FIGURE 5. Shaft assembly. 07

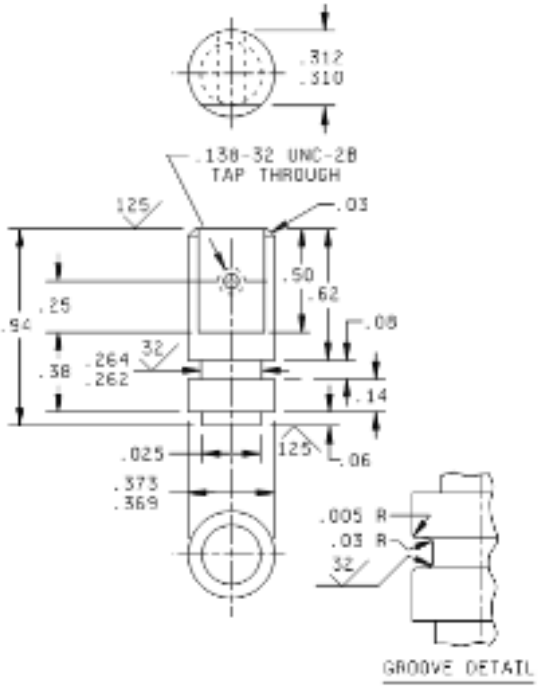


FIGURE 6. Shaft. 08

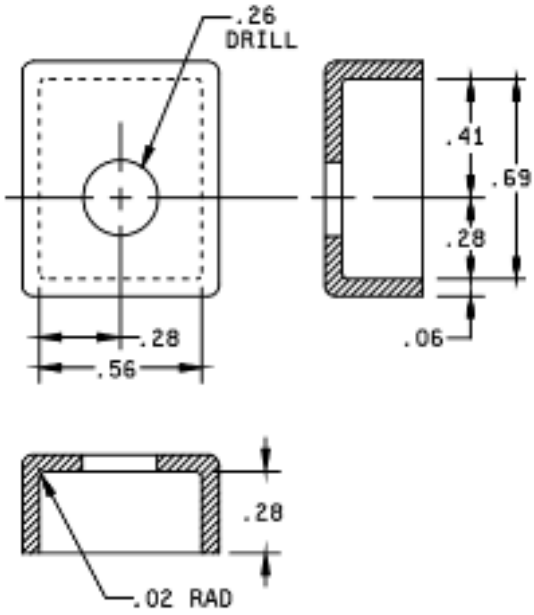


FIGURE 7 Coupler. 09

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

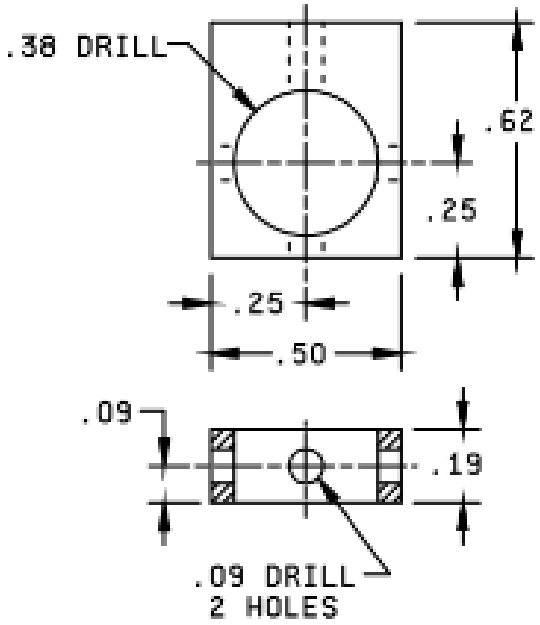


FIGURE 8. Coupler plate. 10


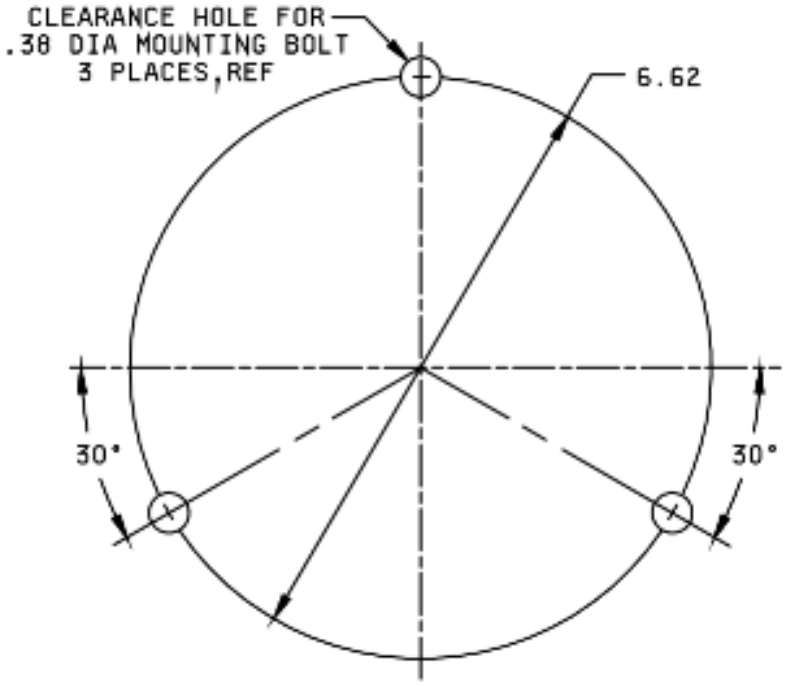


FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

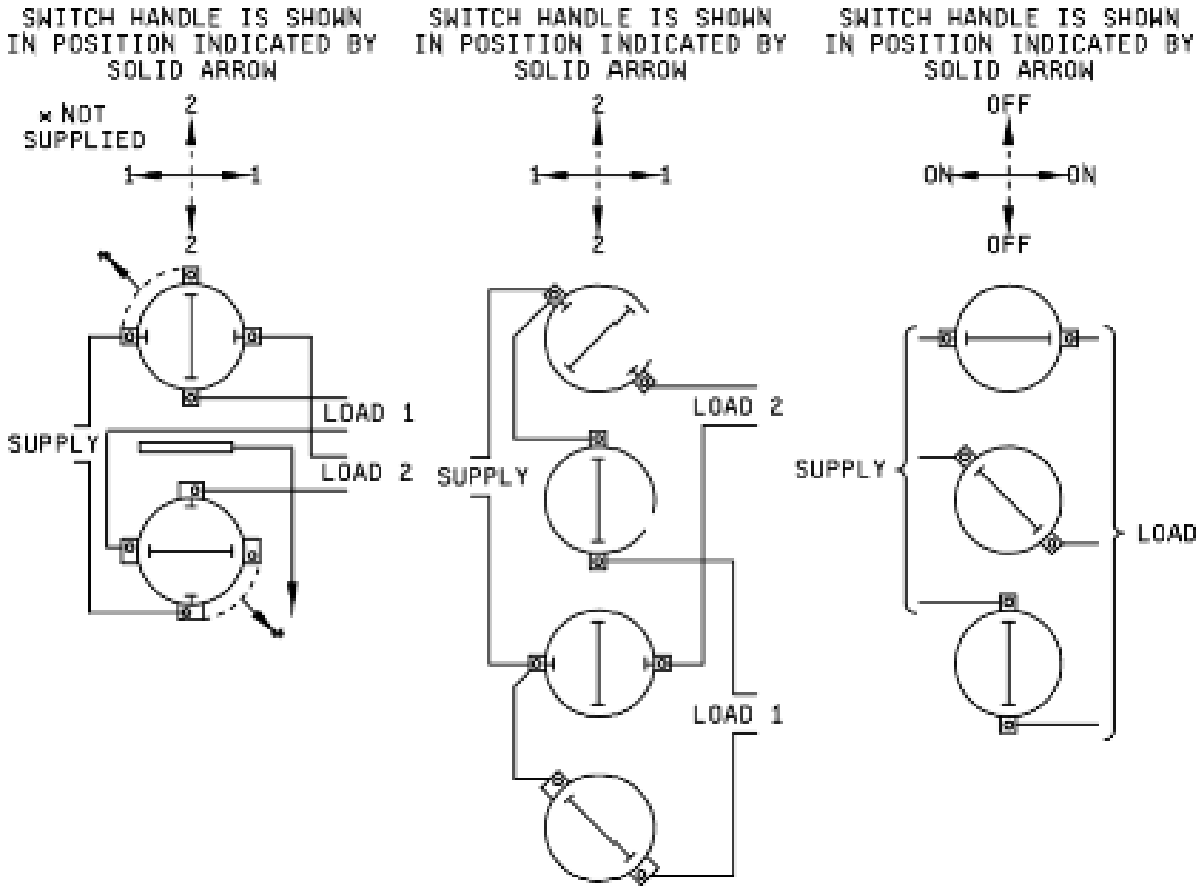

A. Symbol 838.1 B. Symbol 840.1 C. Symbol 851

FIGURE 10. Wiring diagrams. (11) (12) (13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

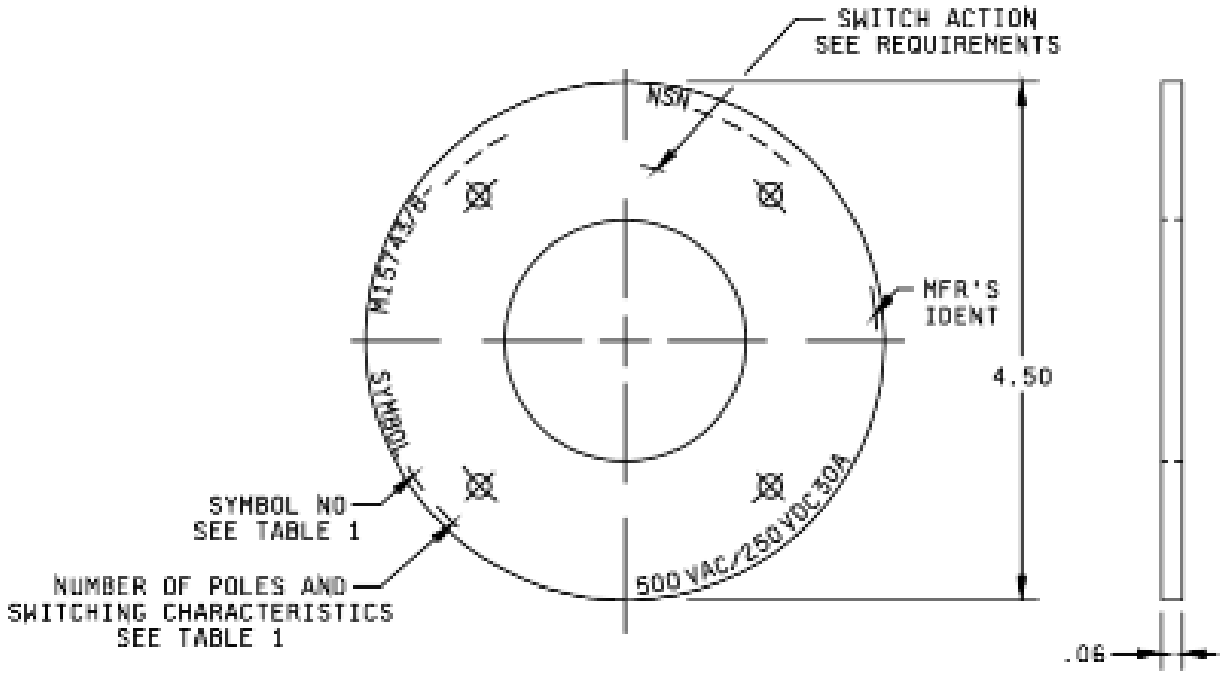


FIGURE 11. Identification plate. (17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 500 V ac, 60 Hz, 250 V dc, 0-30 ampere.
Dimensions and configuration: See figures 1 through 9.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Submersible (15 feet).
Weight: 5 pounds maximum.
Designation and marking: See figure 10 and 11.
Identification data shall be blank. as shown on figure 11. Unless otherwise specified in the ordering data, switch action marking shall be blank
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/8-001	838.1	DPDT	3SR2C4A-2	2	3
M15743/8-002	840.1	DPDT	3SR2C4-2	1	2
M15743/8-003	851	TPST	3SR3A4-2	6	7

1/ NAVSEA Drawing 9000-S6202-74276, in part.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/8-			Material / specification	Remarks
		001	002	003		
01	Switch, enclosed (sym 838.1)	-				See figure 1
02	Switch, enclosed (sym 840.1)		-			See figure 1
03	Switch, enclosed (sym 851)			-		See figure 1
04	Enclosure	1	1	1	MIL-E-24142/5 (modified)	See figure 2 & 3 M24142/5-003
05	O-ring	1	1	1	SAE-AS28775-010 2/	----
06	Handle	1	1	1	Copper alloy ASTM-B-584	See figure 4
07	Shaft assembly	1	1	1	----	See figure 5
08	Shaft	1	1	1	Ni-Cu alloy of QQ-N-281, Stainless Steel, or Brass	See figure 6
09	Coupler	1	1	1	Brass, ASTM-B36/B36M ASTM-B121/B121M	See figure 7
10	Coupler plate	1	1		CRES, or equivalent	See figure 8
11	Wiring diagram	1			MIL-DTL-2036	See figure 10a
12	Wiring diagram		1		MIL-DTL-2036	See figure 10b
13	Wiring diagram			1	MIL-DTL-2036	See figure 10c
14	Switch (type 3SR2C4A)	1			MIL-DTL-15291/7	MIL-S-15291/7-013
15	Switch (type 3SR2C4)		1		MIL-DTL-15291/7	M15291/7-012
16	Switch (type 3SR3A4)			1	MIL-DTL-15291/7	M15291/7-005
17	Identification plate	1	1	1	ASTM-B36/B36M ASTM-B121/B121M	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ SAE-AS28775-010 details are found in SAE-AS28775.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-DTL-15743, this document references the following:

MIL-DTL-2036	QQ-N-281	ASTM-B584
MIL-DTL-15291/7	ASTM-B36/B36M	SAE-AS28775
MIL-E-24142/5	ASTM-B121/B121M	NAVSEA DWG 9000-S6202-74276

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2023-047)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:57Z
Check the source to verify that this is the current version before use.