INCH-POUND
MIL-DTL-15743/9E
6 November 2023
SUPERSEDING
MIL-DTL-15743/9D
27 August 2018

DETAIL SPECIFICATION

# SWITCHES, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, 500 VOLTS ALTERNATING CURRENT/250 VOLTS DIRECT CURRENT, 30 AMPERE, SYMBOLS 839.1 (4PDT), 848.1 (TPDT), AND 2752.1 (SPECIAL)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification MIL-DTL-15743.

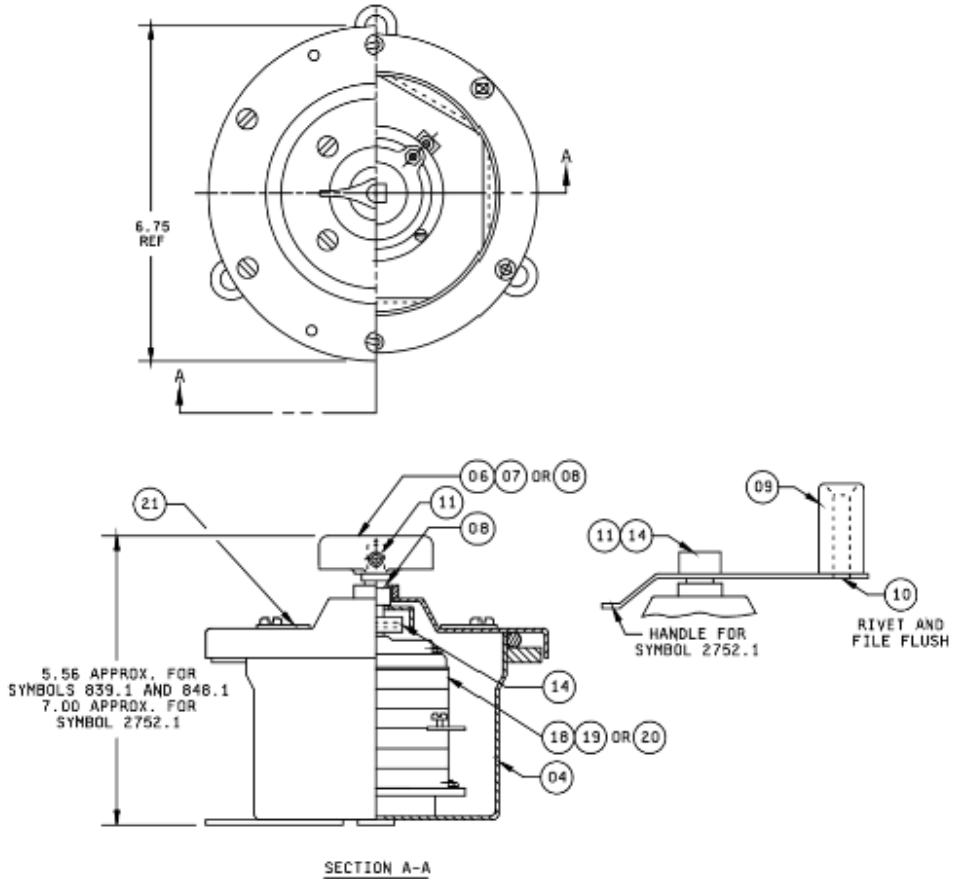



FIGURE 1. Switch, enclosed (typical). (01) (02) (03)
(-001 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.


DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

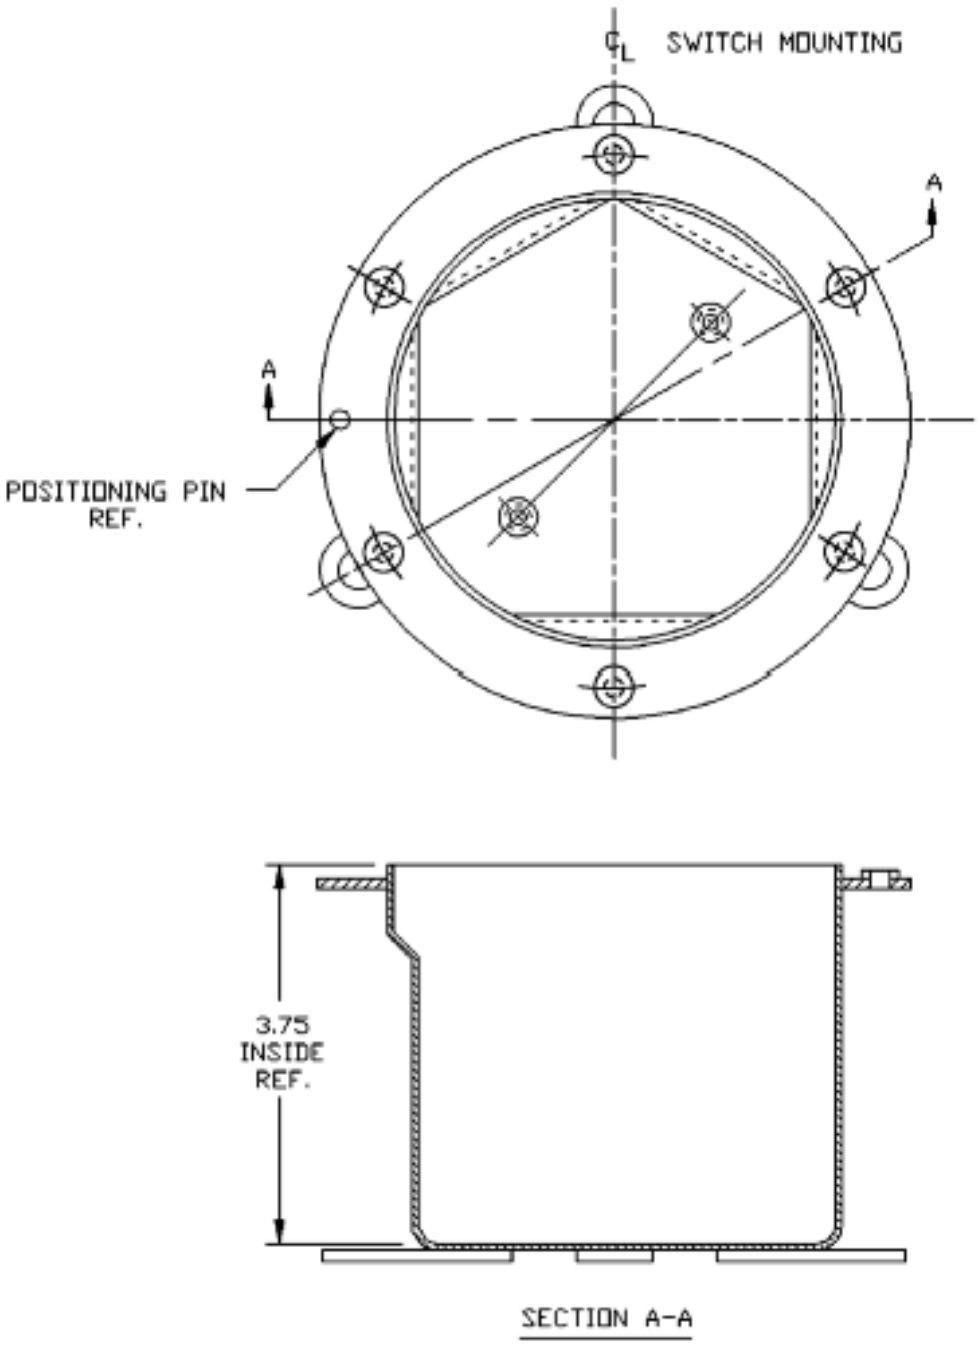



FIGURE 2. Box assembly.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.


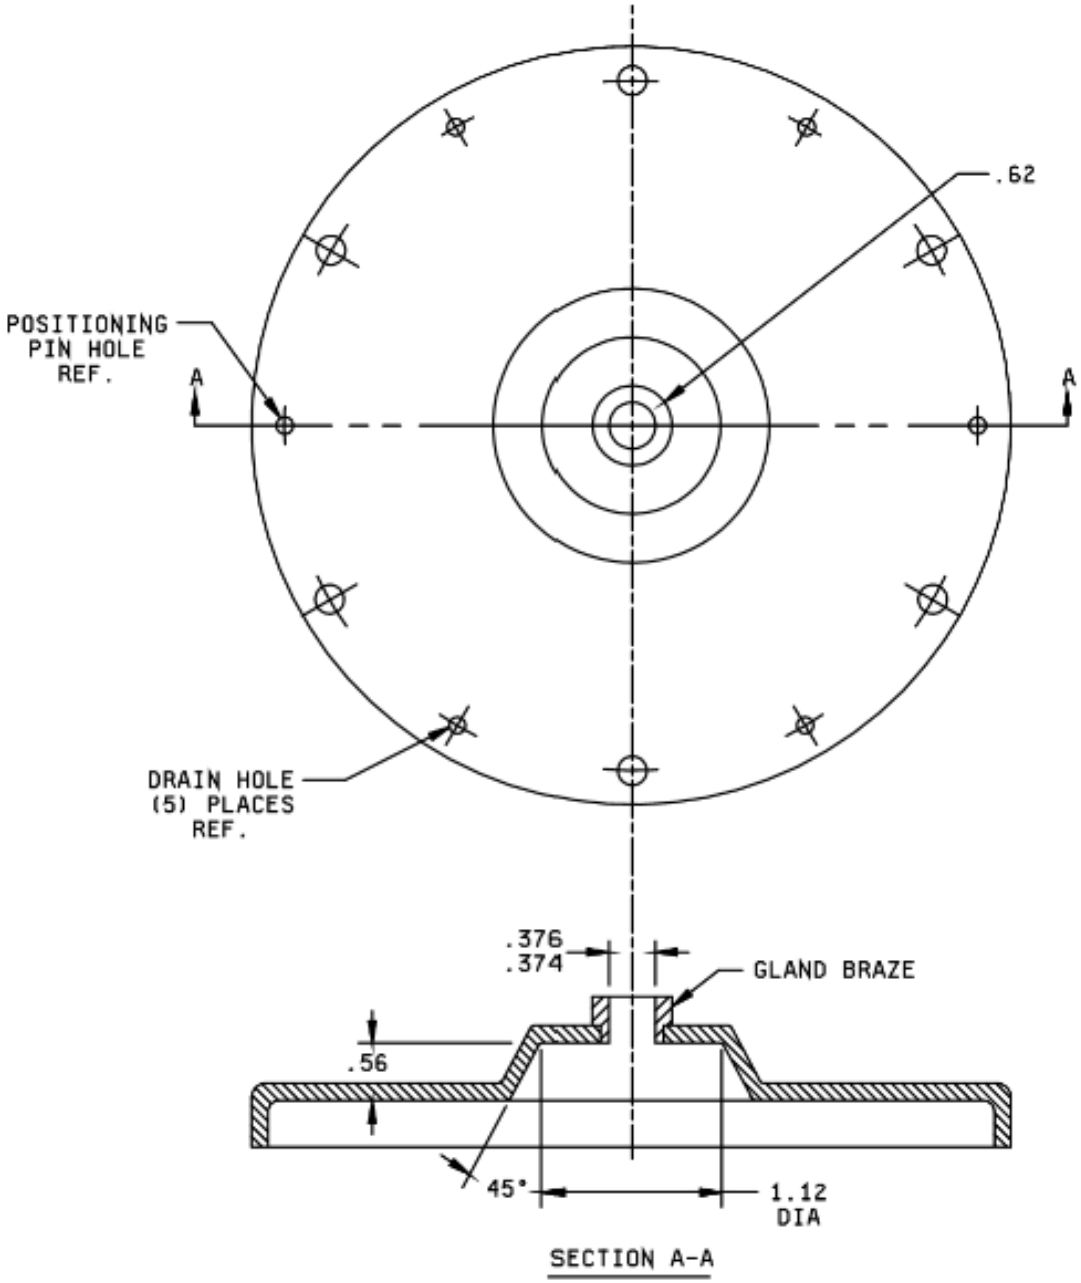




FIGURE 3. Cover assembly (modified).




Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

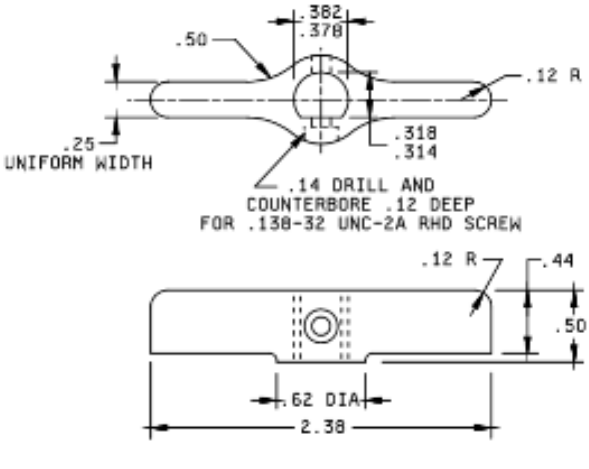


A. symbol 839.1 (06)

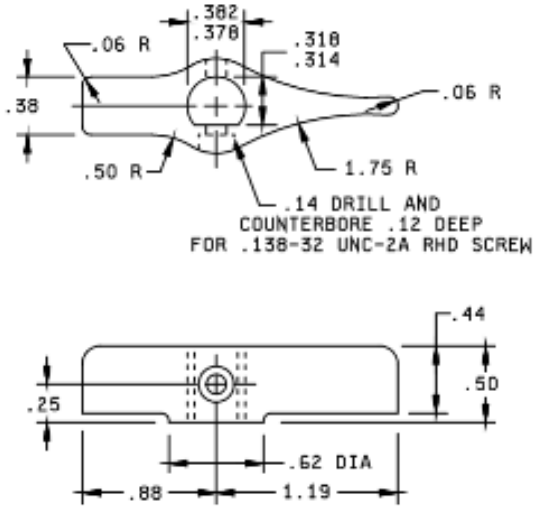


B. Symbol 848.1 (07)

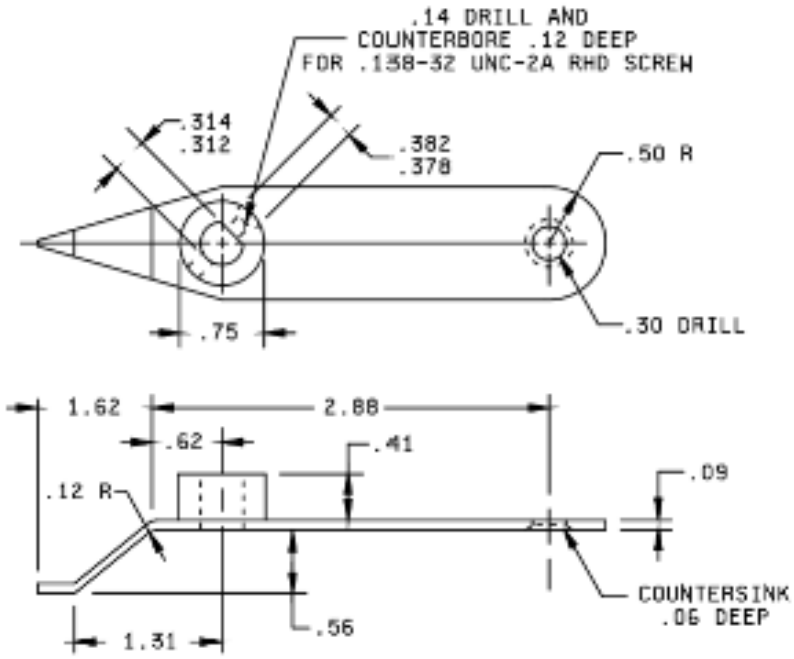


C. Symbol 2752.1. (08)

FIGURE 4. Handles.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

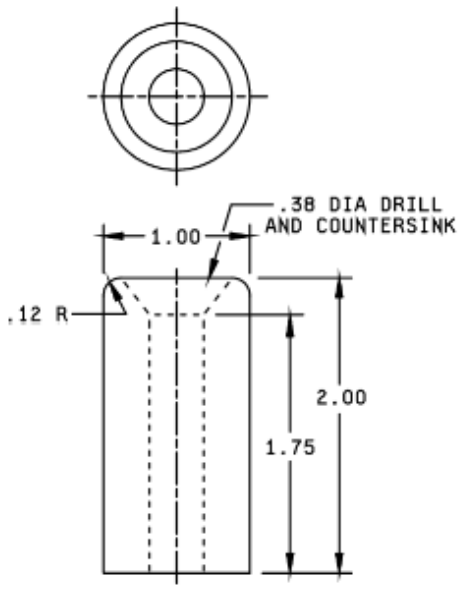



FIGURE 5. Handle knob. 09

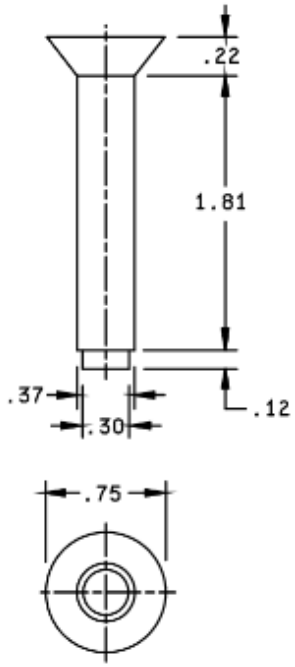



FIGURE 6. Knob pin. 10

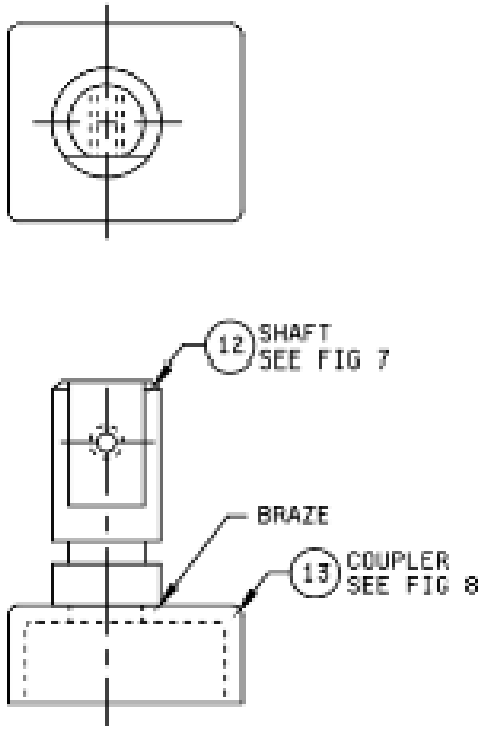



FIGURE 7. Shaft assembly. 11, 12, 13



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

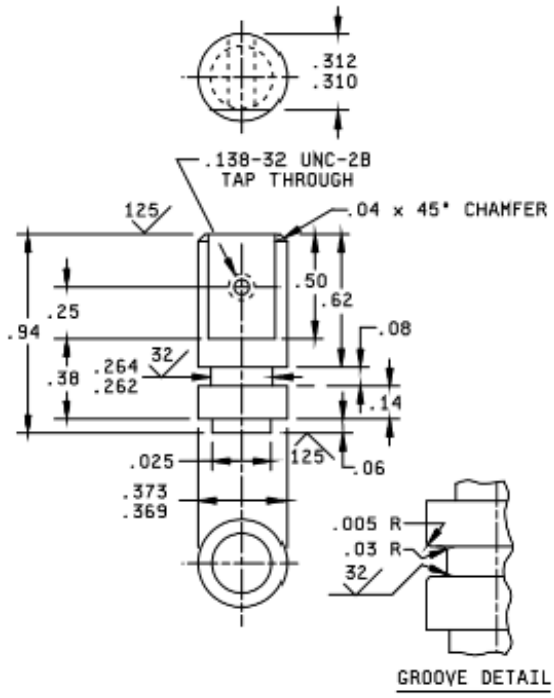



FIGURE 8. Shaft. (12)

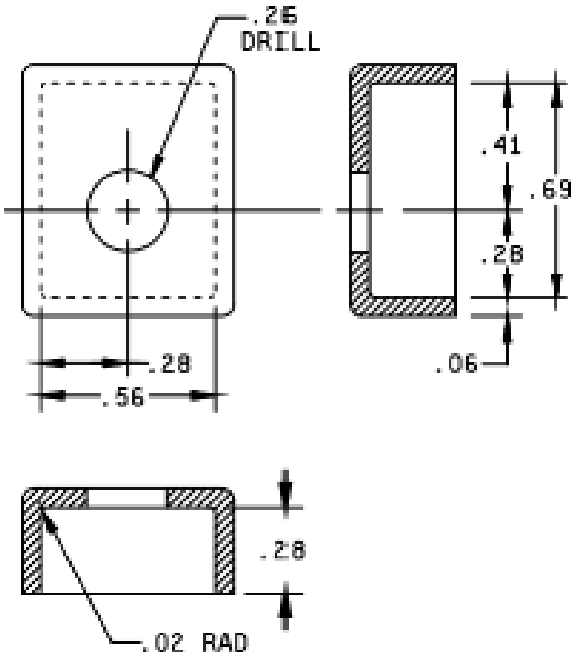



FIGURE 9. Coupler. (13)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

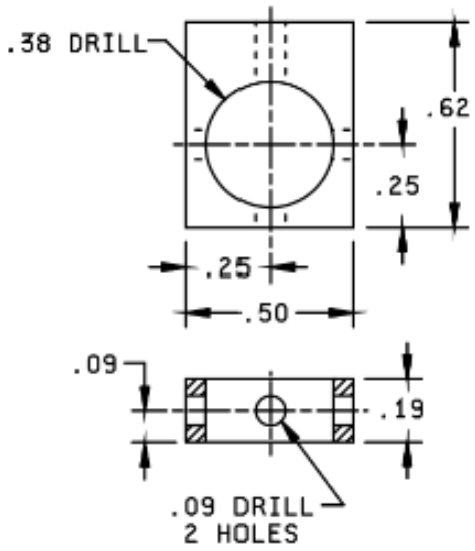



FIGURE 10. Coupler plate. (14)


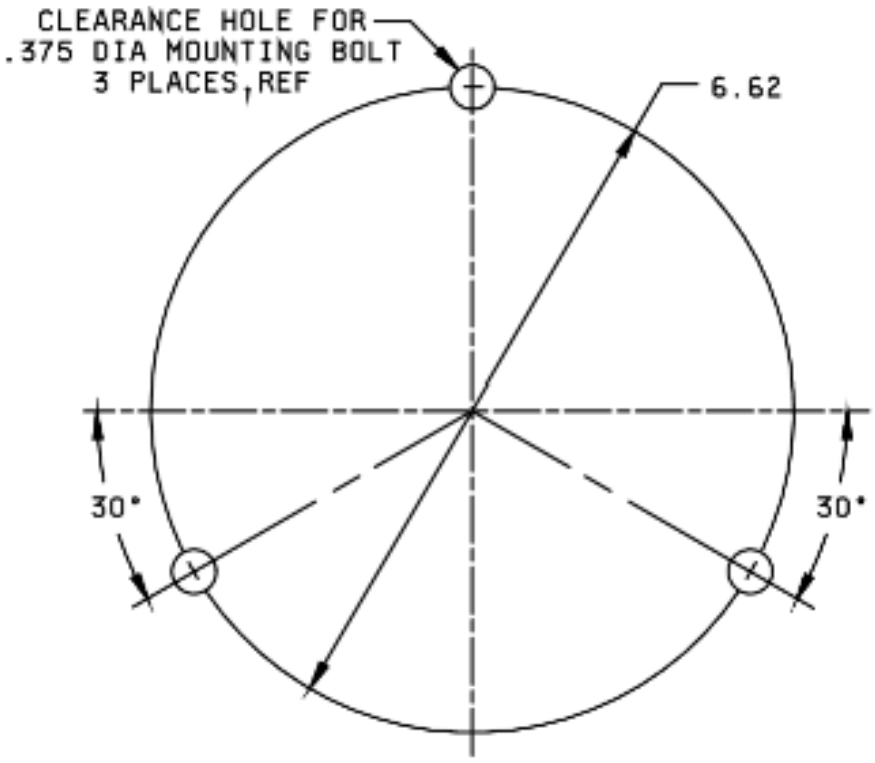



FIGURE 11. Mounting dimensions, ref.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

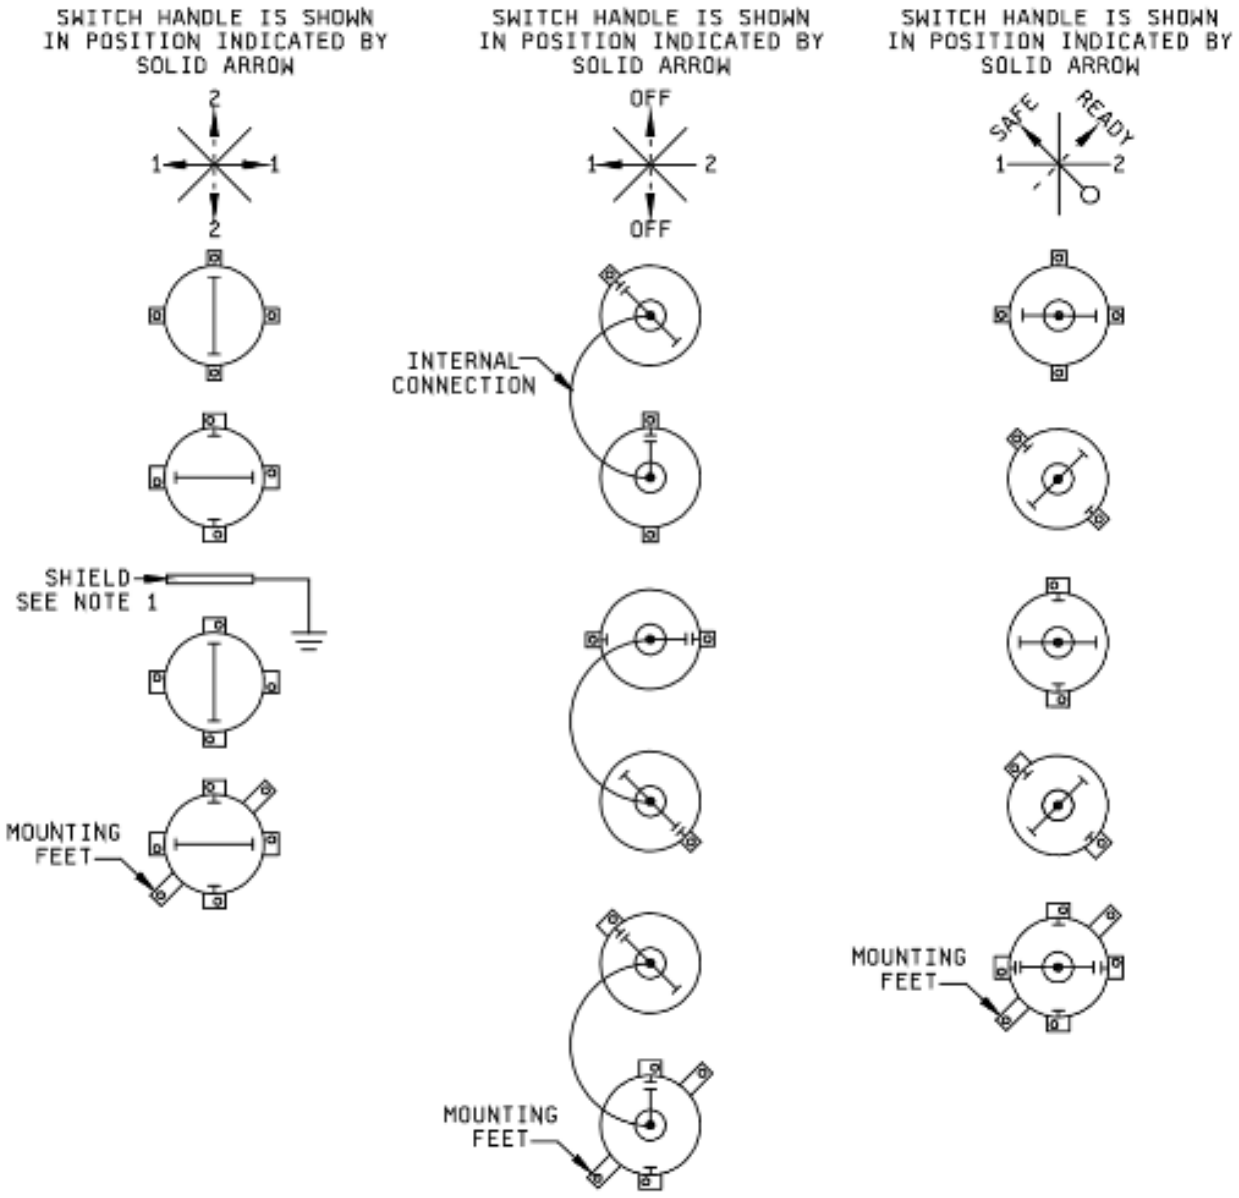


A. Symbol 839.1 B. Symbol 848.1. C. Symbol 2752.1.

NOTE:
1. NAVSEA DWG SHIPS 9000-S6202-74089-25.

FIGURE 12. Wiring diagrams. 15, 16, 17



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

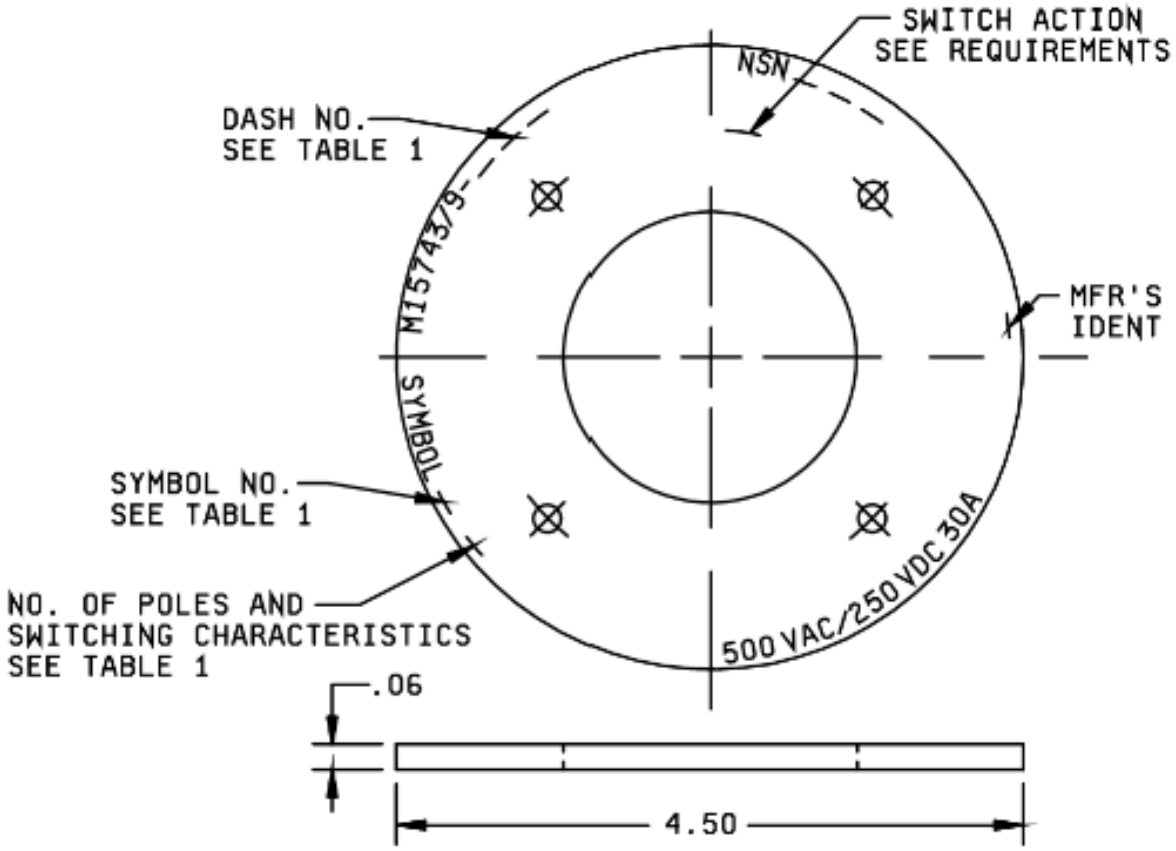



FIGURE 13. Identification plate. (21)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 500 V ac, 60 Hz, 250 V dc, 0-30 ampere.
Dimensions and configuration: See figures 1 through 10.
Wiring diagram: See figure 12 a, b, and c.
Mounting dimensions: See figure 11.
Degree of enclosure: Submersible (15 feet).
Weight:
(a) Symbol 839.1 6 pounds maximum.
(b) Symbol 848.1 6 pounds maximum.
(c) Symbol 2752.1 7 pounds maximum.
Designation and marking: See figure 12.
Identification data shall be blank. as shown on figure 13. Unless otherwise specified in the ordering data, switch action marking shall be blank
Parts: The parts shown in table II and as specified in MIL-DTL-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part numbers and general information.

| Military part no. | Symbol no. | No. of poles and switching characteristics | Supersedes 1/ | | |
|---|---|---|---|---|---|
| | | | Type | Unit | Sheet |
| M15743/9-001 | 839.1 | 4PDT | 3SR4C4-2 | 4 | 5 |
| M15743/9-002 | 848.1 | TPDT | 3SR3B4-2 | 3 | 4 |
| M15743/9-003 | 2752.1 | SPECIAL | 3SR7S4-2 | 5 | 6 |

1/ NAVSEA Drawing 9000-S6202-74276, in part.

ORDERING DATA:
Acquisition documents should specify the following:
Switch action marking, if required (see requirements).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

| Item no. 1/ | Description | Quantity M15743/9- 001 | 002 | 003 | Material / specification | Remarks |
|---|---|---|---|---|---|---|
| 01 | Switch, enclosed (sym 839.1) | - | | | | See figure 1 |
| 02 | Switch, enclosed (sym 848.1) | | - | | | See figure 1 |
| 03 | Switch, enclosed (sym 2752.1) | | | - | | See figure 1 |
| 04 | Enclosure | 1 | 1 | 1 | Brass, MIL-E-24142/5 (modified) | See figure 2 & 3 M24142/5-003 |
| 05 | O-ring | 1 | 1 | 1 | SAE-AS28775-010 2/ | ---- |
| 06 | Handle | 1 | | | Copper alloy ASTM-B-584 | See figure 4a |
| 07 | Handle | | 1 | | Brass, alloy ASTM-B584 | See figure 4b |
| 08 | Handle | | | 1 | CRES, or equivalent | See figure 4c |
| 09 | Handle knob | | | 1 | Plastic, type FBG of MIL-I-24768 | See figure 5 |
| 10 | Knob pin | | | 1 | CRES, or SAE-AMS-QQ-S-763 | See figure 6 |
| 11 | Shaft assembly | 1 | 1 | 1 | ---- | See figure 7 |
| 12 | Shaft | 1 | 1 | 1 | Ni-Cu alloy of QQ-N-281, Stainless Steel, or Brass | See figure 8 |
| 13 | Coupler | 1 | 1 | 1 | Brass, ASTM-B36/B36M ASTM-B121/B121M | See figure 9 |
| 14 | Coupler plate | 1 | 1 | 1 | CRES, or equivalent | See figure 10 |
| 15 | Wiring diagram | 1 | | | MIL-DTL-2036 | See figure 12a |
| 16 | Wiring diagram | | - | | MIL-DTL-2036 | See figure 12b |
| 17 | Wiring diagram | | | - | MIL-DTL-2036 | See figure 12c |
| 18 | Switch (type 3SR4C4) | 1 | | | MIL-DTL-15291/7 | M15291/7-015 |
| 19 | Switch (type 3SR3B4) | | 1 | | MIL-DTL-15291/7 | M15291/7-009 |
| 20 | Switch (type 3SR7S4) | | | 1 | MIL-DTL-15291/7 | M15291/7-018 |
| 21 | Identification plate | 1 | 1 | 1 | ASTM-B36/B36M ASTM-B121/B121M | See figure 13 |

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ SAE-AS28775-010 details are found in SAE-AS28775.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.

Referenced documents: in addition to MIL-DTL-15743, this document references the following:

| | | |
|---|---|---|
| MIL-DTL-2036 | QQ-N-281 | SAE-AMS-QQ-S-763 |
| MIL-DTL-15291/7 | ASTM-B36/B36M | SAE-AS28775 |
| MIL-E-24142/5 | ASTM-B121/B121M | NAVSEA DWG 9000-S6202-74276 |
| MIL-I-24768 | ASTM-B584 | |

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2023-048)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:58Z
Check the source to verify that this is the current version before use.