INCH-POUND
MIL-S-15743/12A(SH)
22 November 1993
SUPERSEDING
MIL-S-15743/12(SH)
27 August 1984

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), SNAP ACTION, TRANSFER, WITH INDICATION, 125 VOLTS ALTERNATING CURRENT, 30 AMPERE, SYMBOL 2763 (4PDT)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15743.

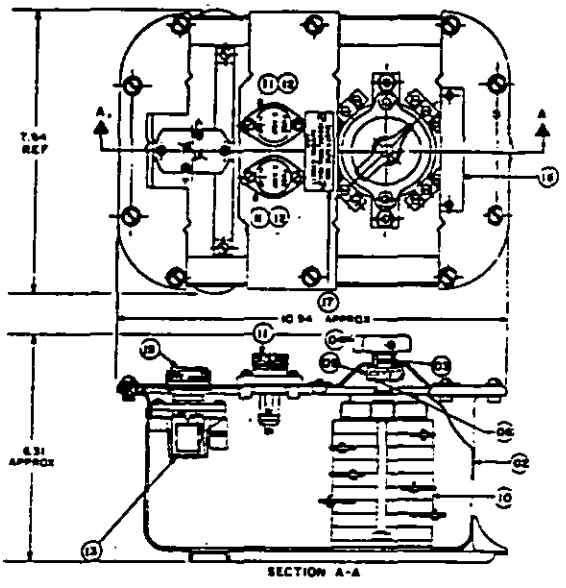


FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

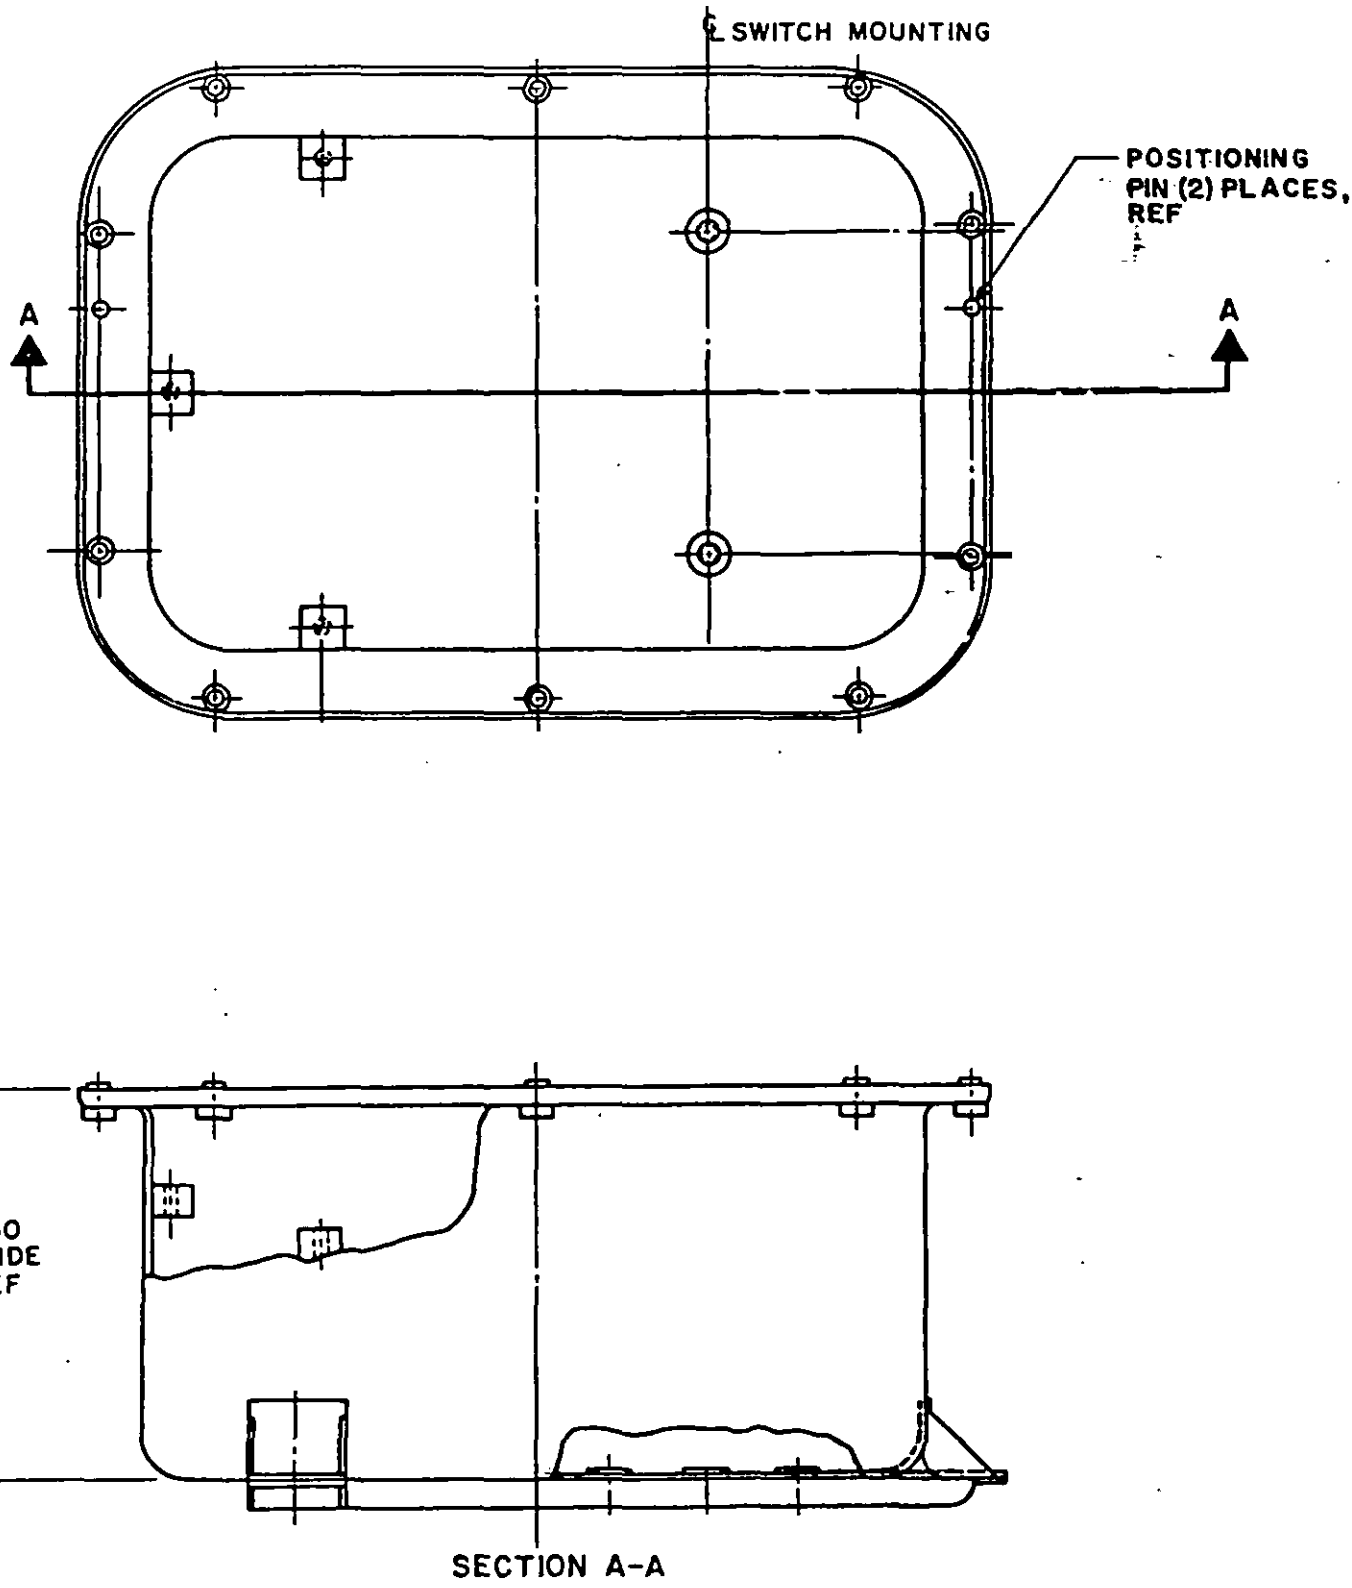


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

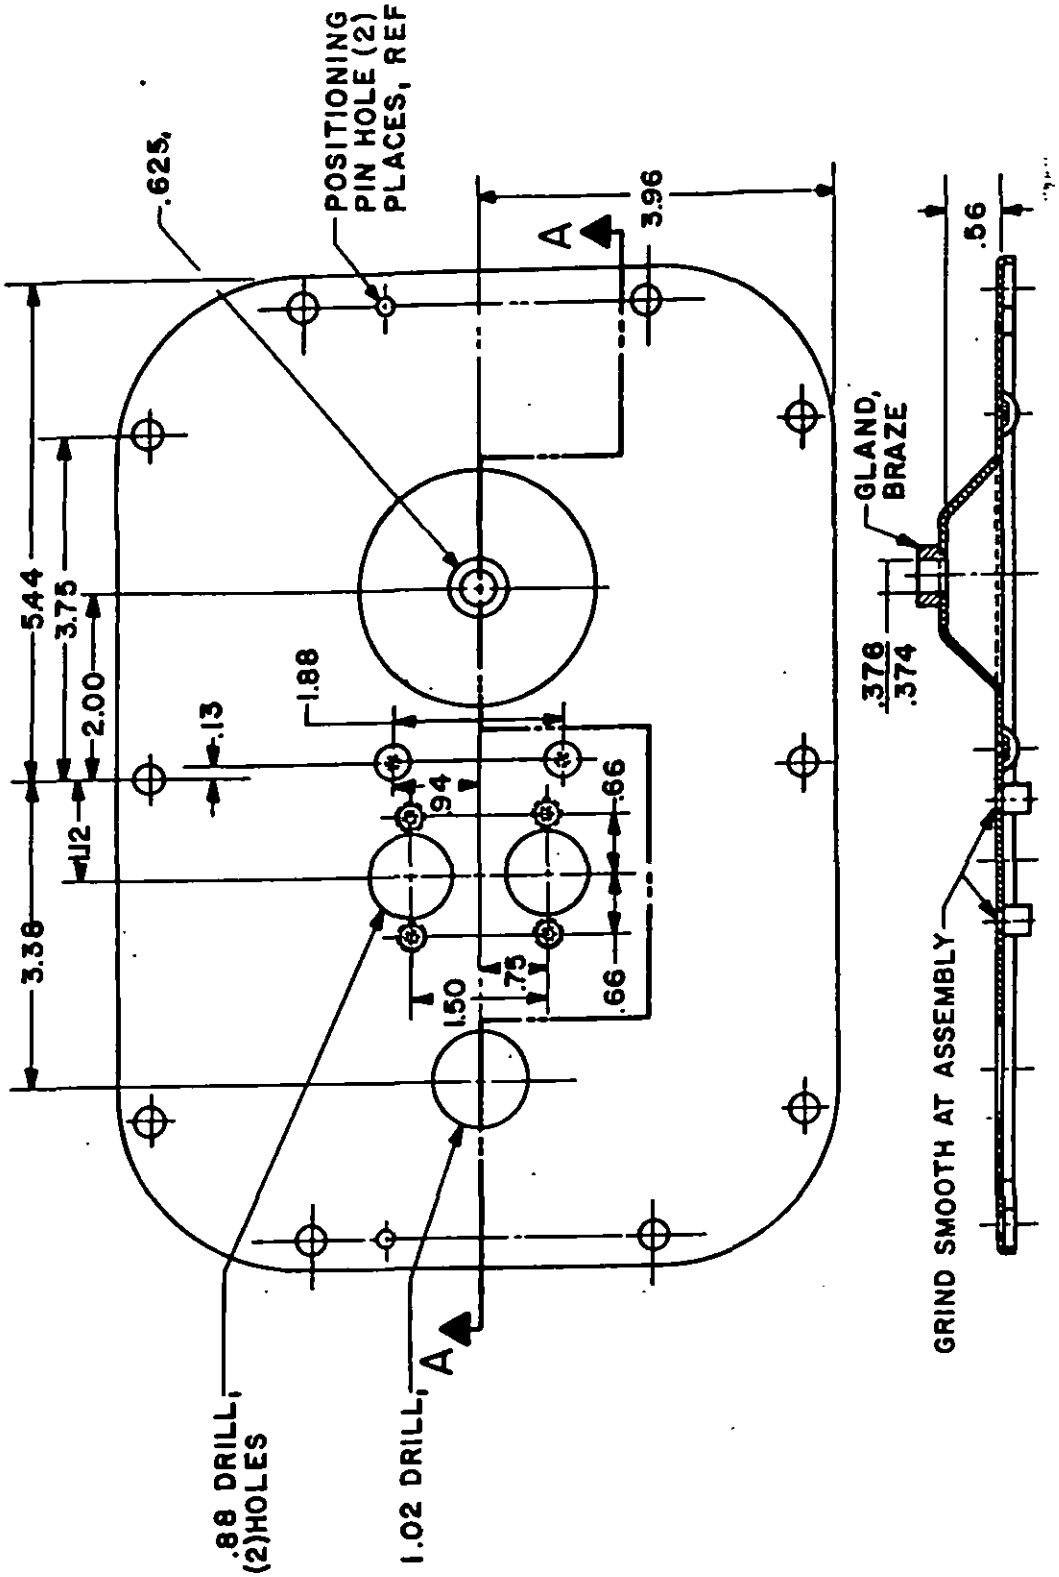


FIGURE 3. Cover assembly (modified). (01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

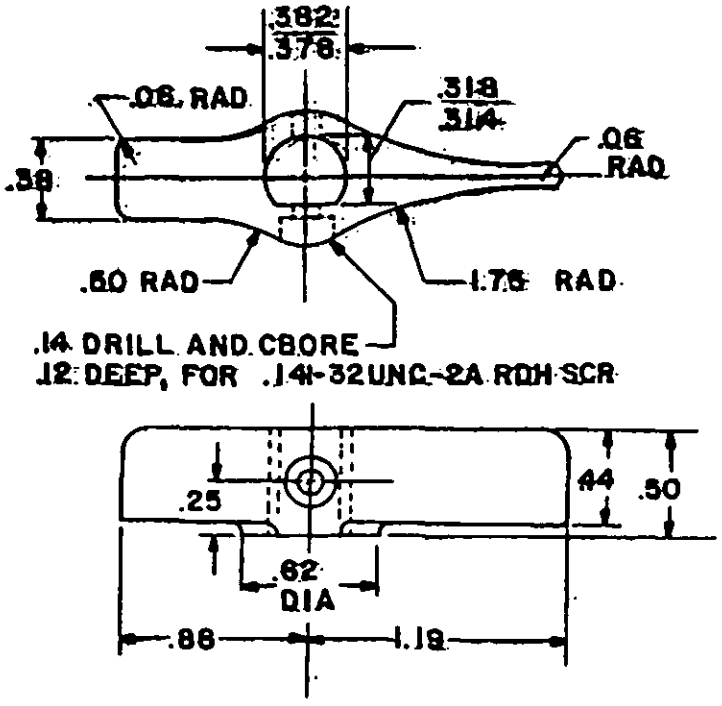


FIGURE 4. Handle. (04)

Source: https://assist.dla.mil -- Downloaded: 20261O-18T07:59Z
Check the source to verify that this is the current version before use.

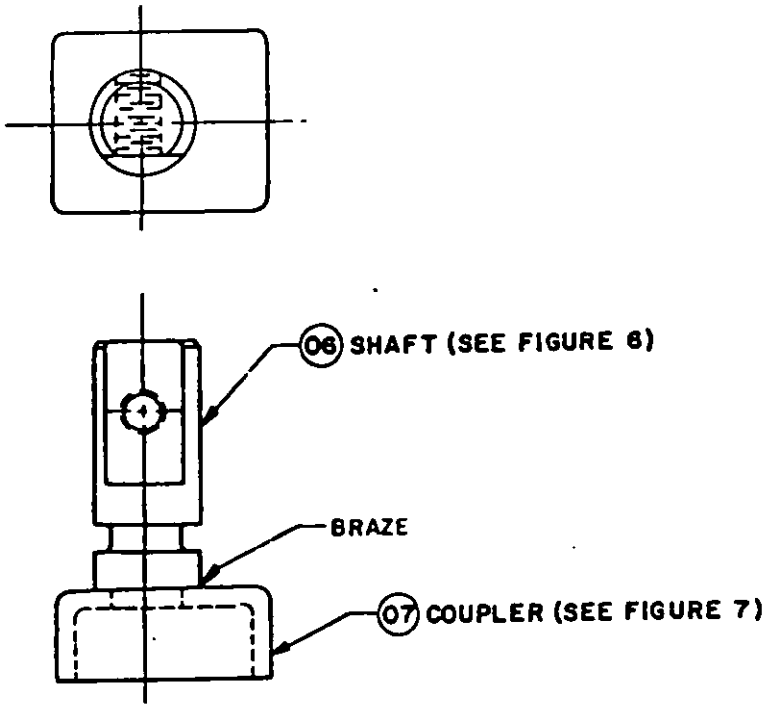


FIGURE 5. Shaft assembly. (05)

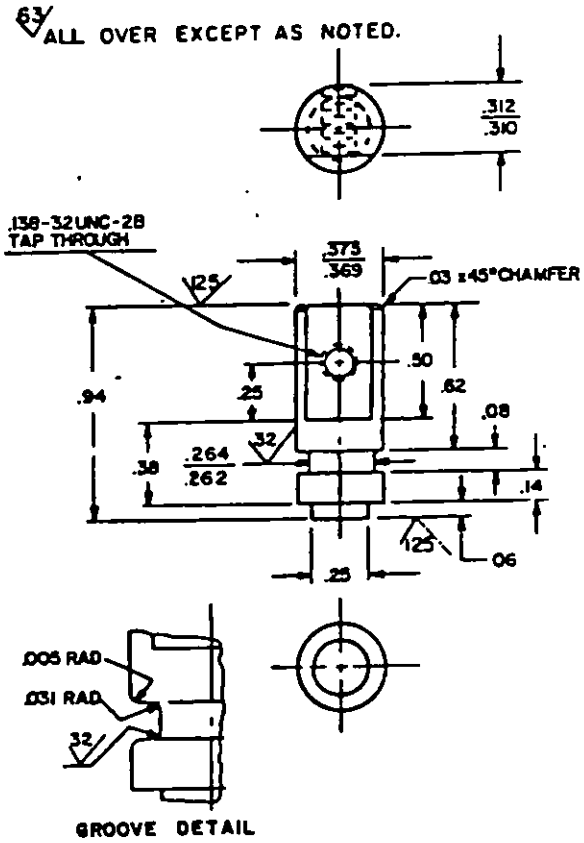


FIGURE 6. Shaft. (06)

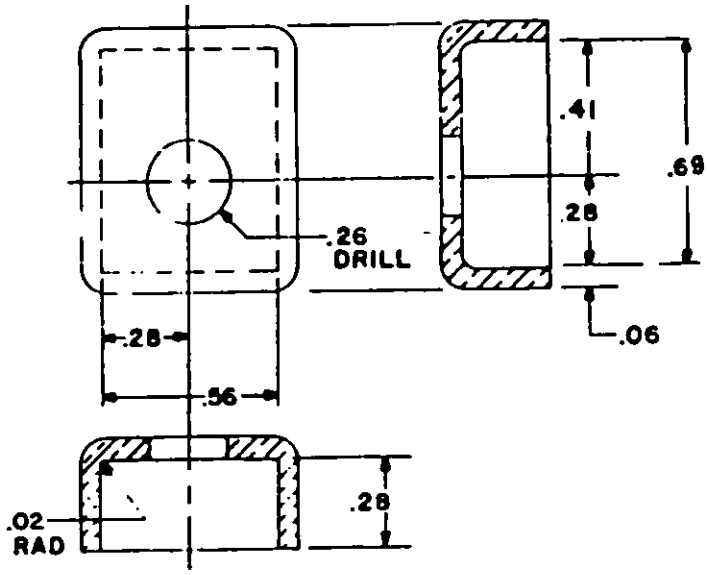


FIGURE 7. Coupler. (07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

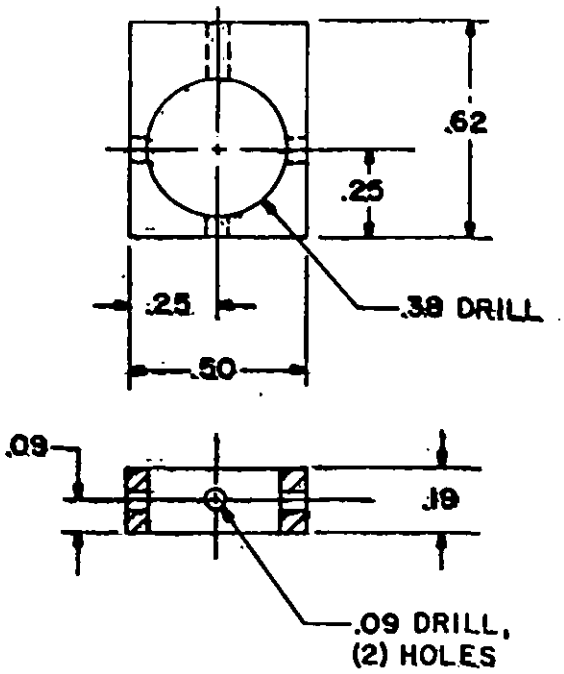


FIGURE 8. Coupler plate. (08)

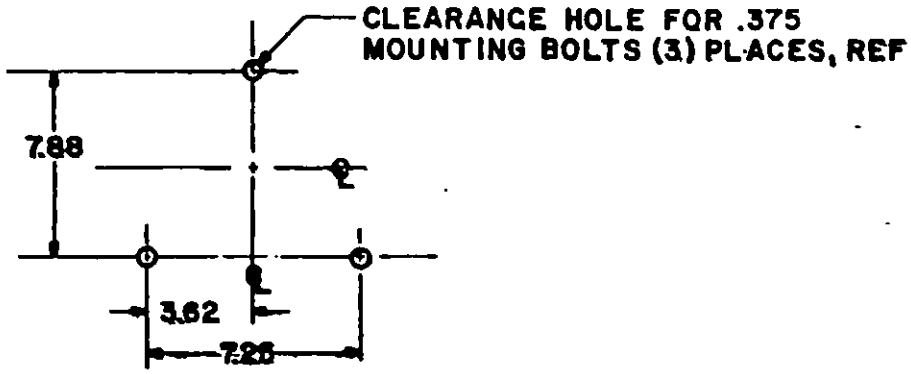


FIGURE 9. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

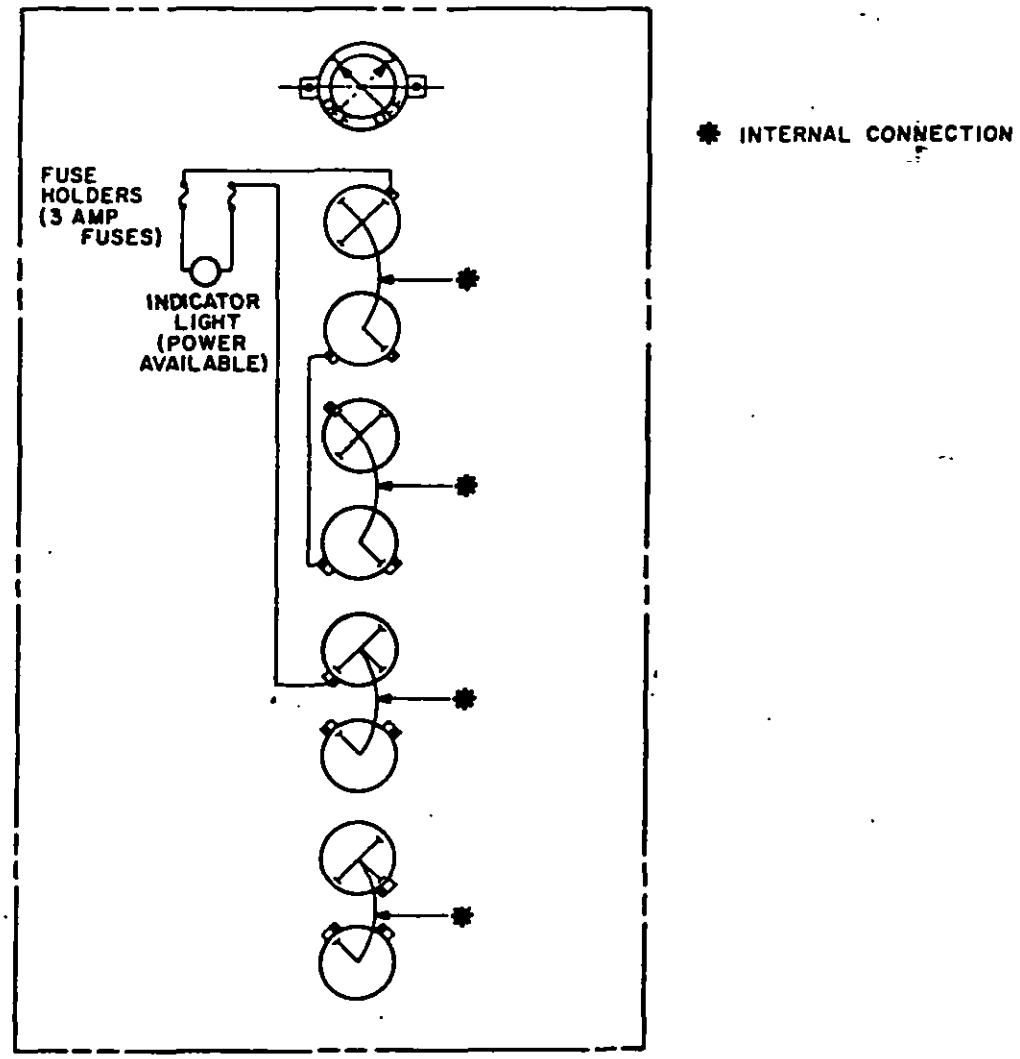


FIGURE 10. Wiring diagram. (09)

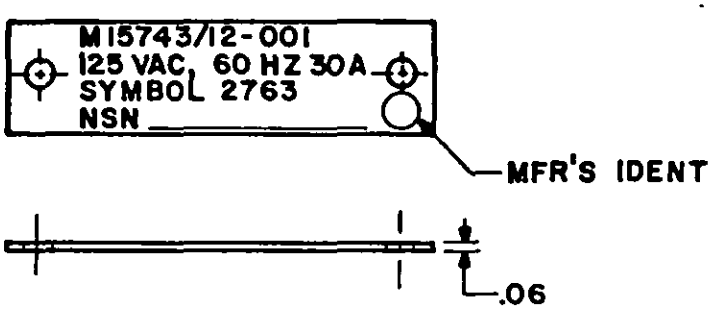


FIGURE 11. Identification plate. (17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-30 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 8.
Wiring diagram: See figure 10.
Mounting dimensions: See figure 9.
Degree of enclosure: Submersible (15 feet).
Weight: 32 pounds maximum.
Designation and marking: See figure 11.
Identification data shall be as shown on figure 11. Unless otherwise specified in the ordering data, switch action circuit identification plate shall be furnished blank.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/12-001	2763	4PDT	3SR4D4-3		

1/ NAVSEA Drawing 9000-S6202-74332.

ORDERING DATA:

Acquisition documents should specify the following:
Switch action/circuit identification marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no.1/	Description	Quantity M15743/12-001	Material/specification	Remarks
01	Switch, enclosed	1		See figure 1
02	Enclosure	1	Brass, MIL-E-24142/3 (modified)	See figure 2 & 3 M24142/3-001
03	O-ring	1	MS28775-010	----
04	Handle	1	Copper alloy ASTM B 584	See figure 4
05	Shaft assembly	1	----	See figure 5
06	Shaft	1	Ni-Cu alloy of QQ-N-281	See figure 6
07	Coupler	1	Brass, ASTM B 36, ASTM B 121	See figure 7
08	Coupler plate	1	CRES, class 304 or 316 of QQ-S-766	See figure 8
09	Wiring diagram	1	MIL-E-2036	See figure 10
10	Switch (type 3SR4D4)	1	MIL-S-15291/7	M15291/017
3/11	Fuseholder	2	MIL-F-19207/13, (type FHN23W)	----
12	Fuse	2	MIL-F-15160/19	Style FO9A 250 V 3A
13	Indicator light	1	MIL-S-3661/65, (type LH98/3)	----
14	Lamp, incandescent	2	MS15612-3	Industry no. TS-159
15	Target lens "PWR ON"	1	MIL-L-3661/52, (type LC38 TM IM)	----
16	Switch action/ circuit identi-fication plate	1	Brass, QQ-B-613	3.50 x .75 x .06
17	Identification plate	1	ASTM B 36, ASTM B 121	See figure 11

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ "3 AMP" shall be engraved on top of item 11 in 0.125 inch letters and filled with white enamel (see figure 1).

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5930-N746-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:59Z
Check the source to verify that this is the current version before use.