INCH-POUND
MIL-S-15743/14A(SH)
22 November 1993
SUPERSEDING
MIL-S-15743/14(SH)
27 August 1984

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, WATERTIGHT SNAP ACTION, TRANSFER, WITH INDICATION, SYMBOL 853 (TPDT), 500 VOLTS ALTERNATING CURRENT, 60 AMPERE, SYMBOL 854 (TPDT), 125 VOLTS ALTERNATING CURRENT, 60 AMPERE

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15743.

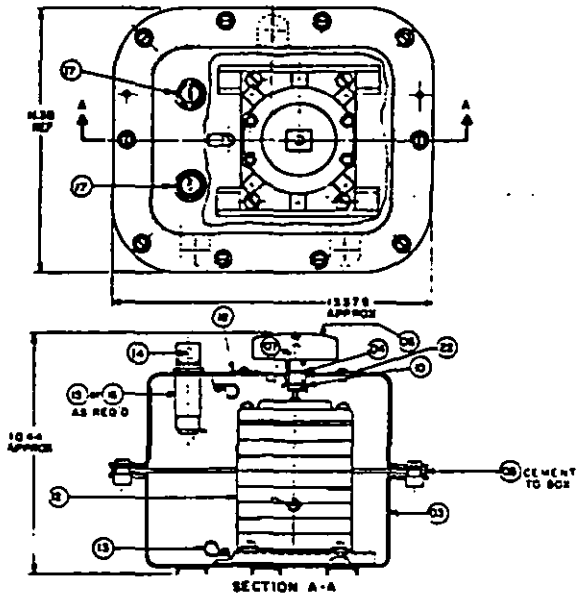


FIGURE 1. Switch, enclosed, (typical). (01) (02)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

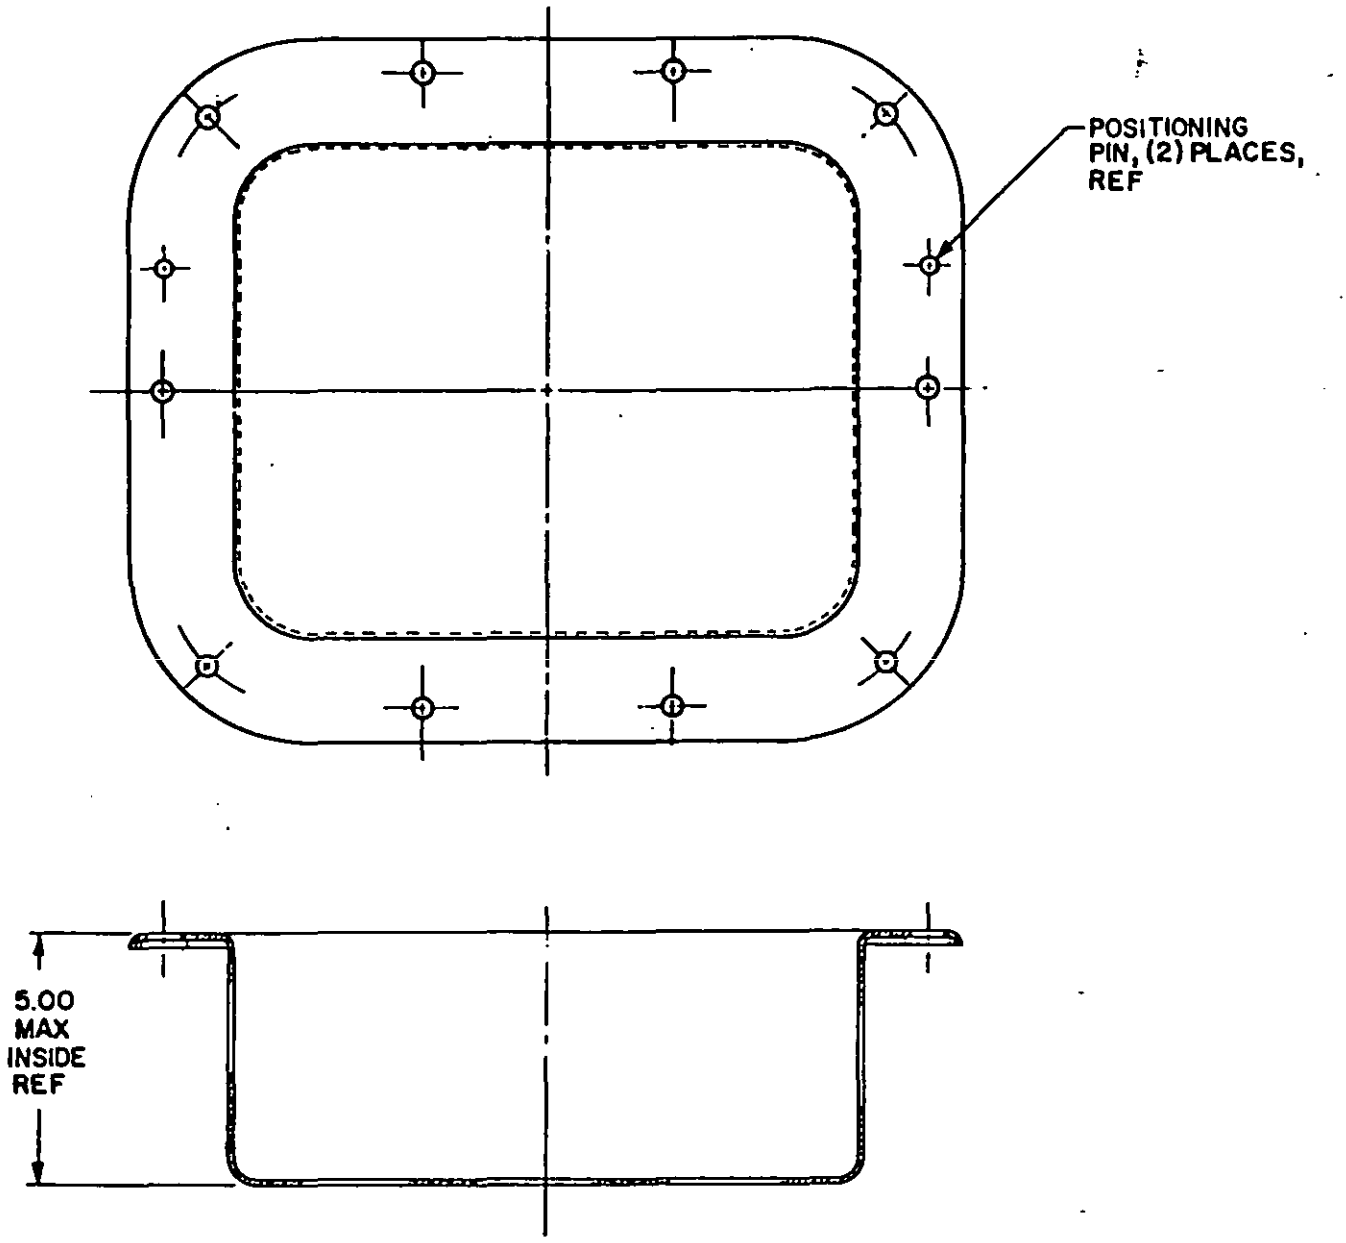


FIGURE 2. Box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

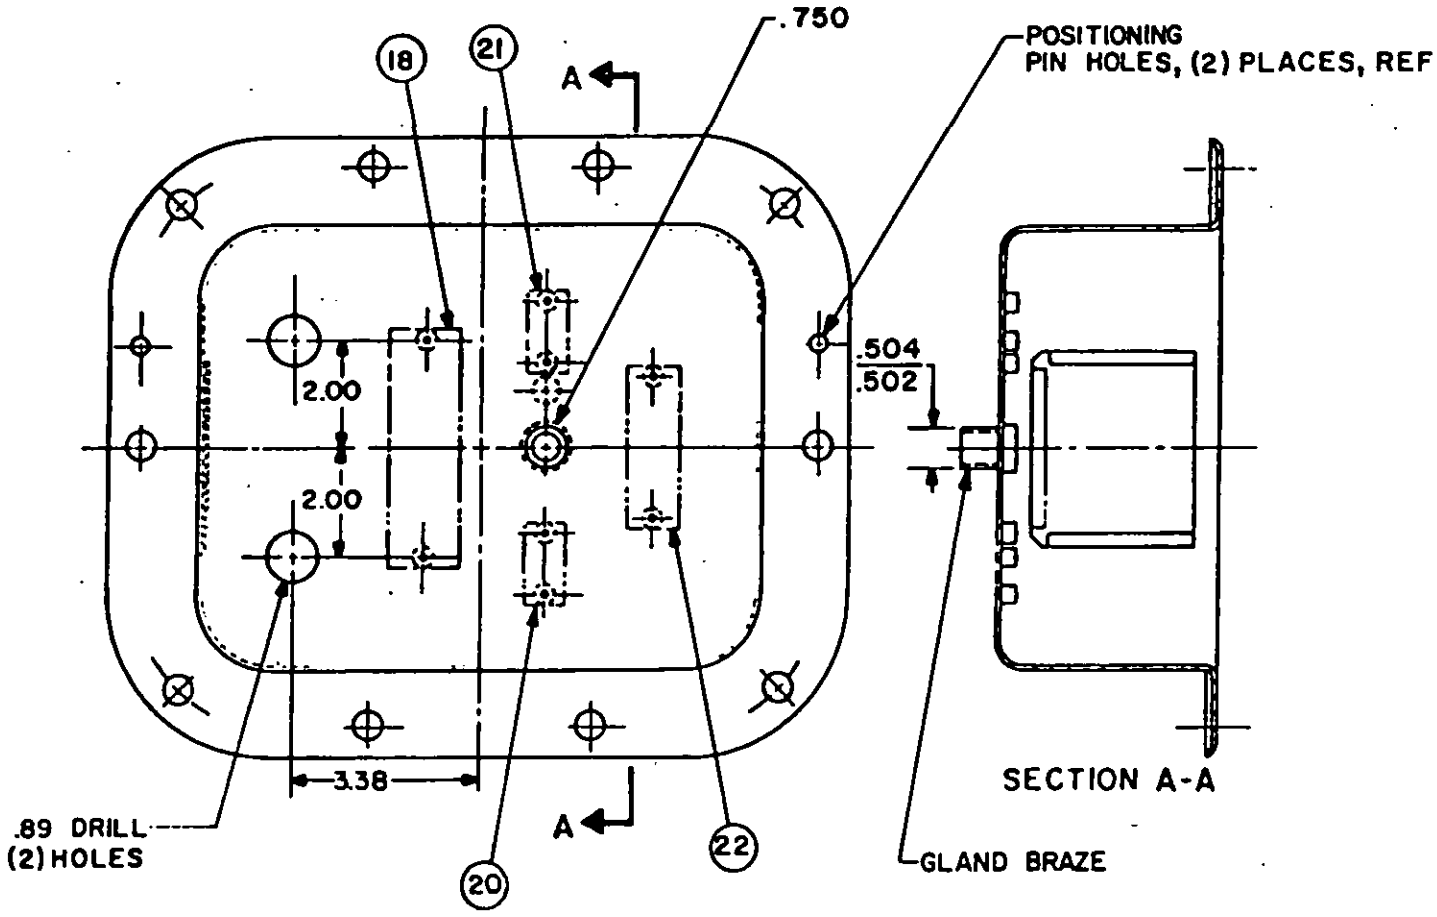


FIGURE 3. Cover assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

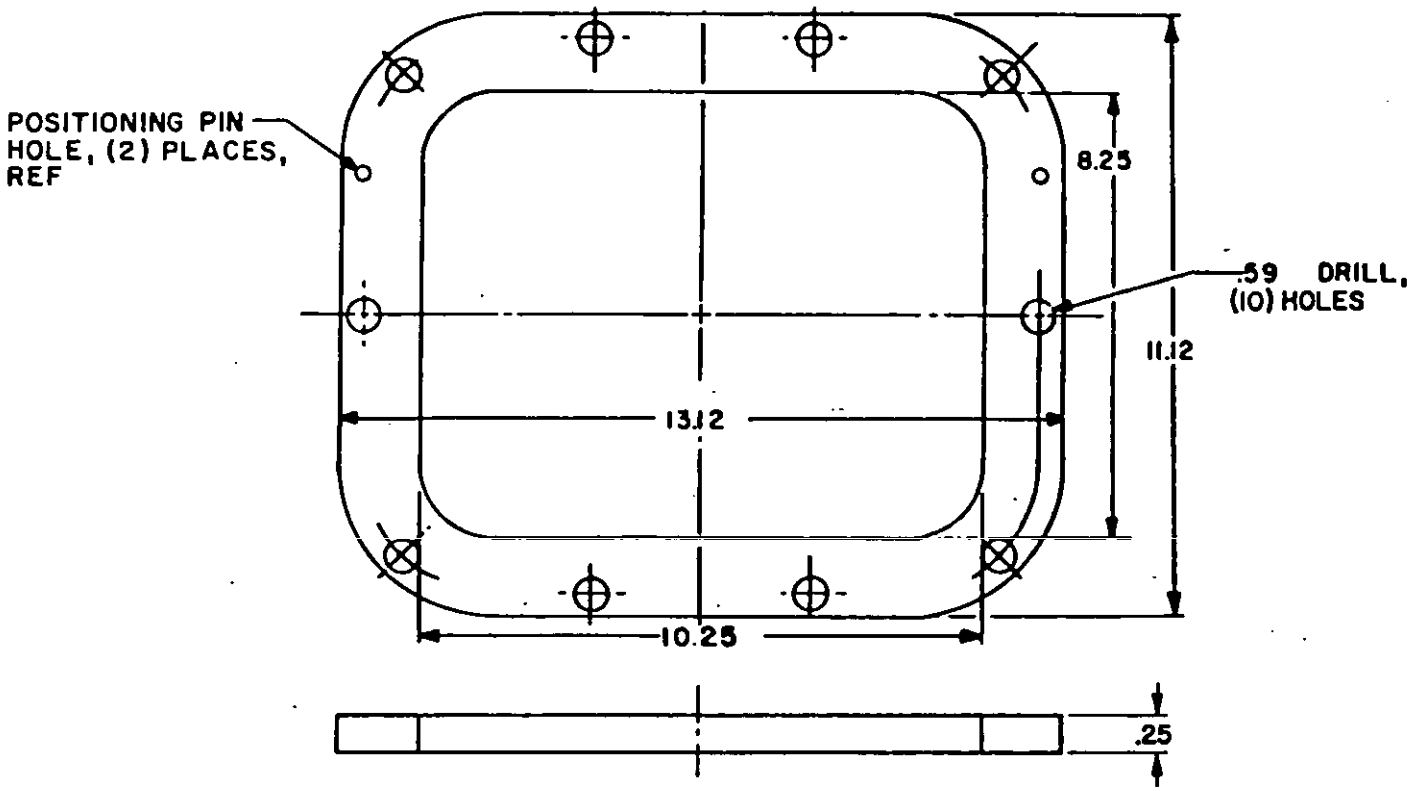


FIGURE 4. Cushion gasket. (05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

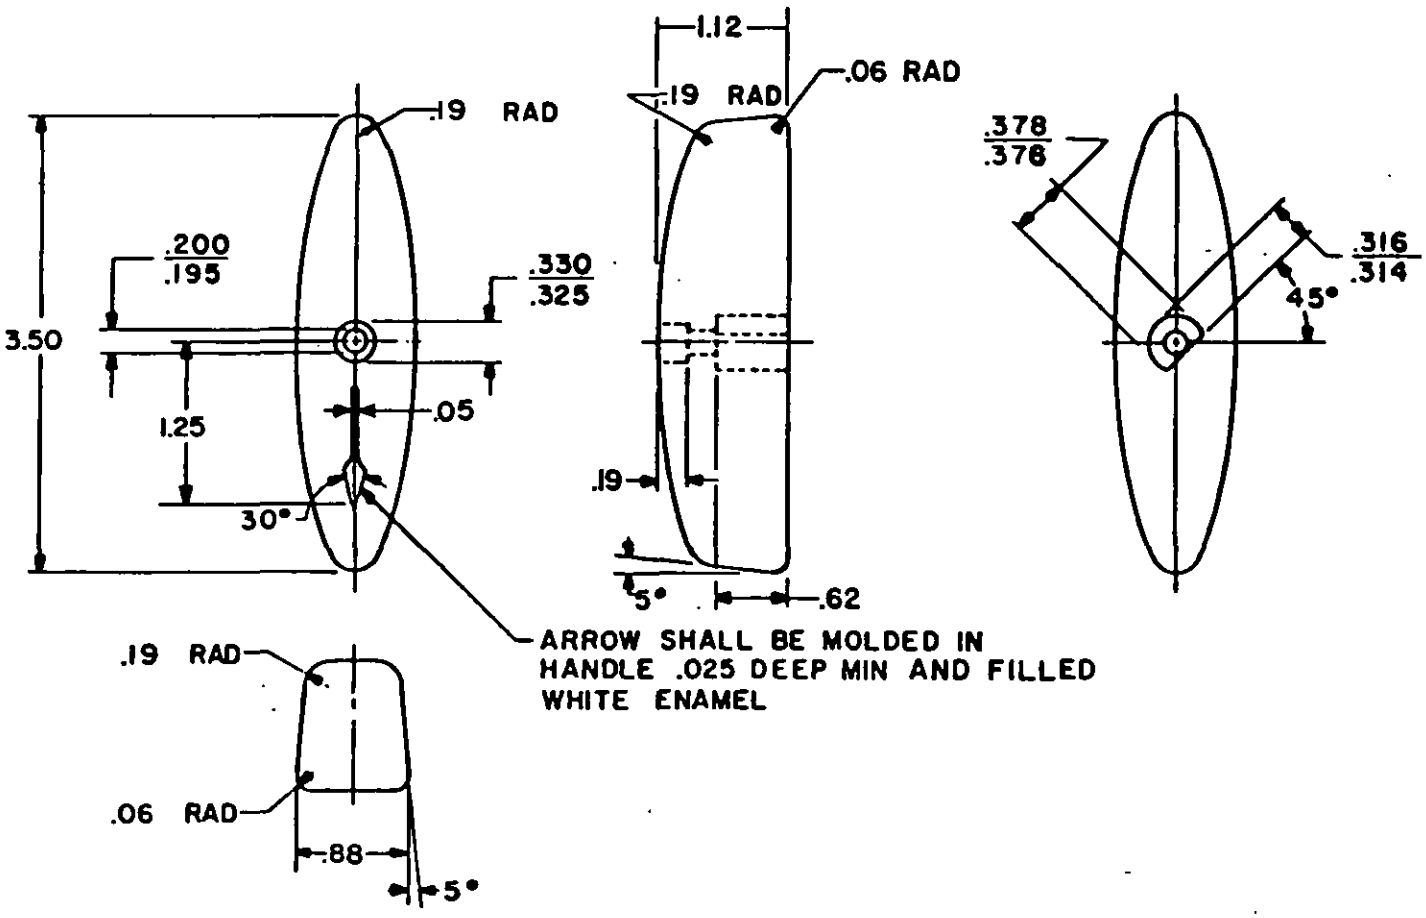


FIGURE 5. Handle. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

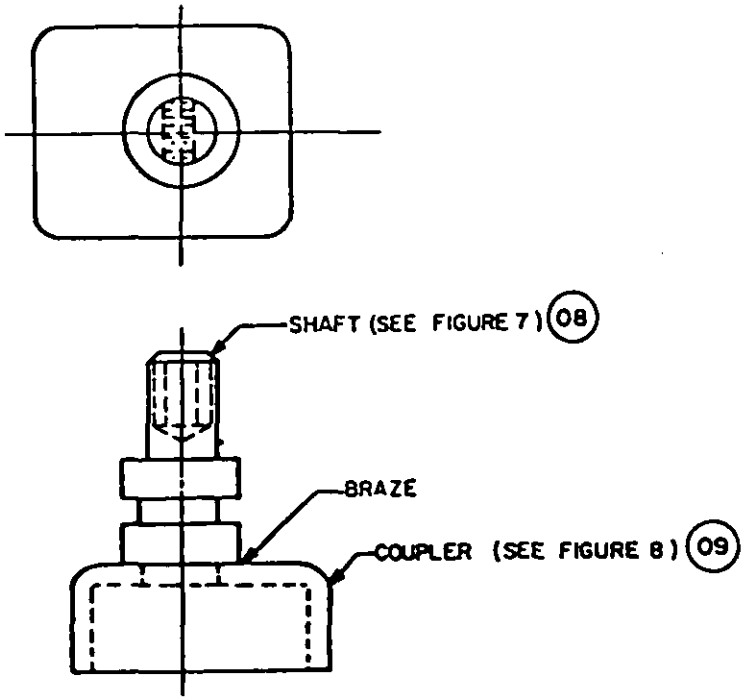


FIGURE 6. Shaft assembly. 07

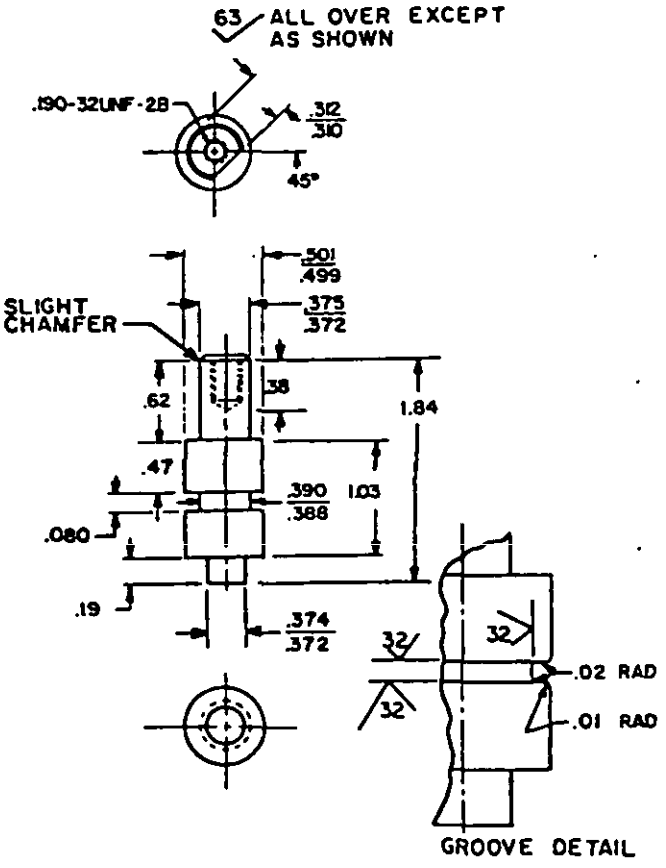


FIGURE 7. Shaft. 08

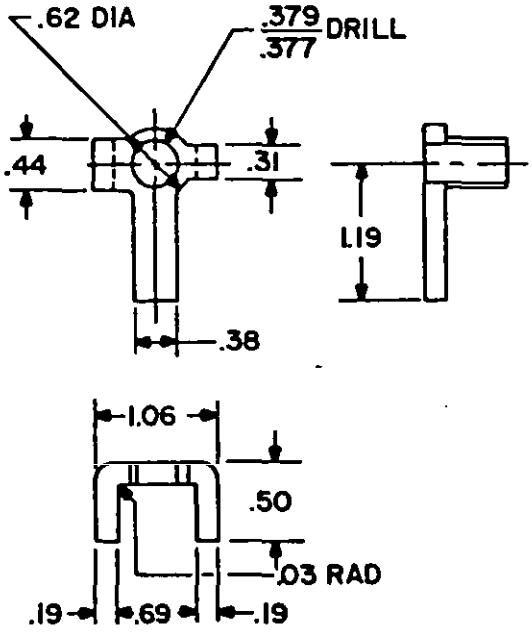


FIGURE 8. Coupler. 09

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

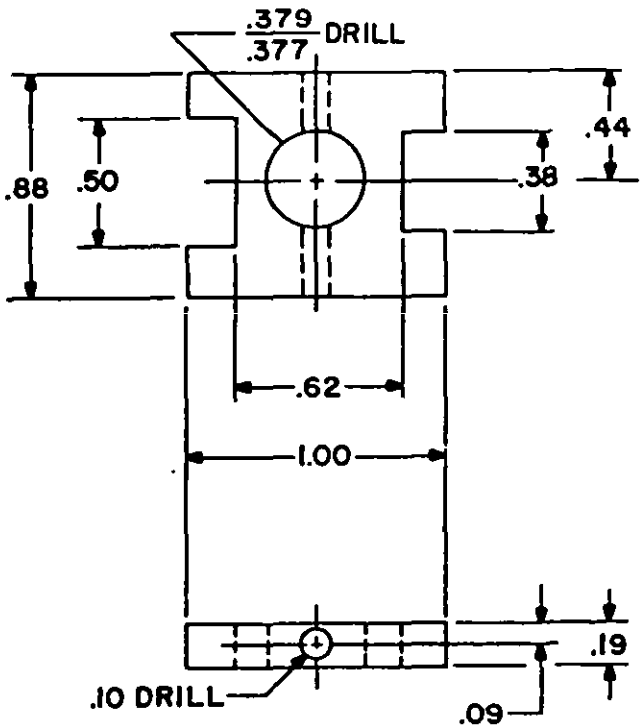


FIGURE 9. Coupler plate. (10)

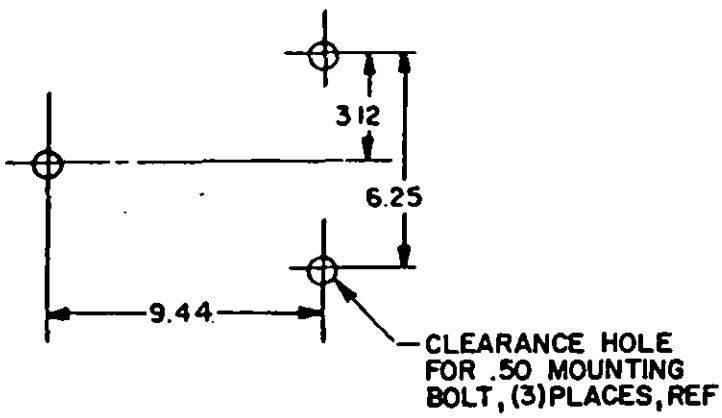


FIGURE 10. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

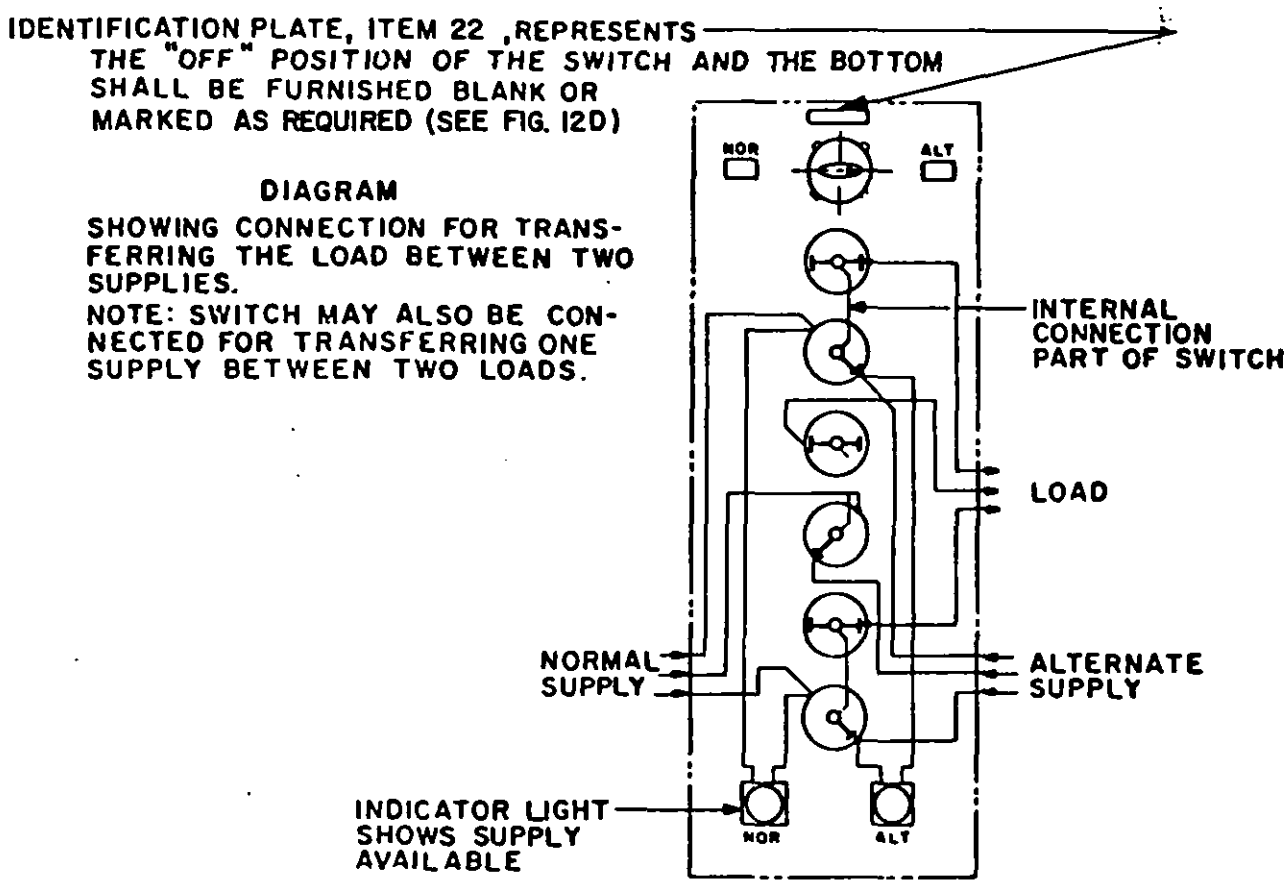


FIGURE 11. Wiring diagram. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.



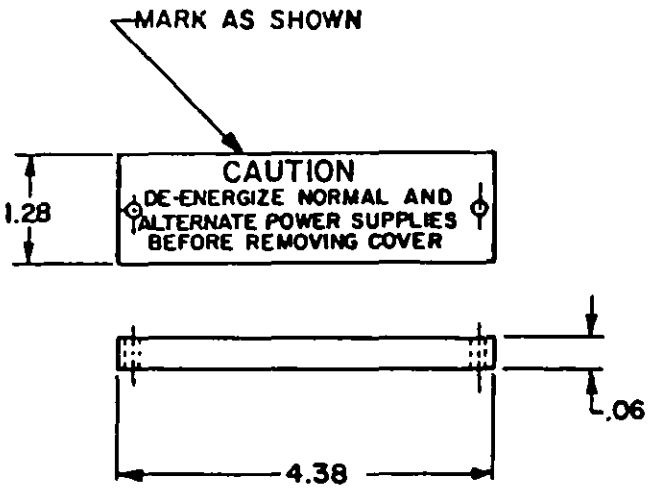



FIGURE 12. Caution plate. (18)

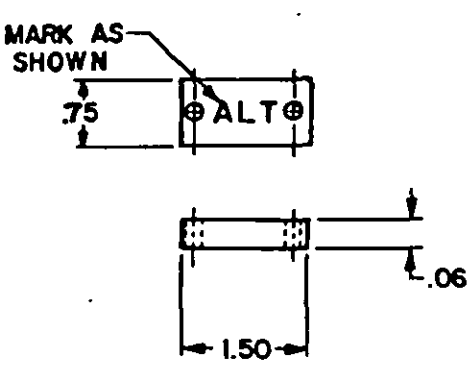

A. "ALT" information plate. (19)

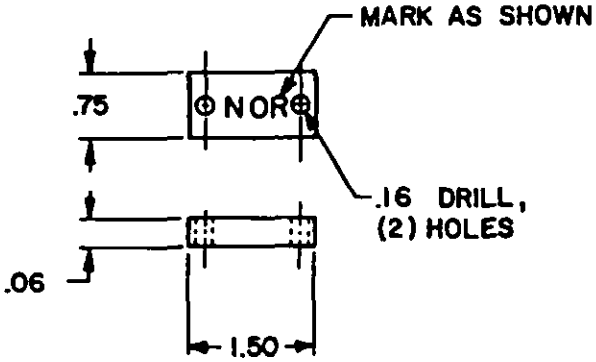

B. "NOR" information plate. (20)

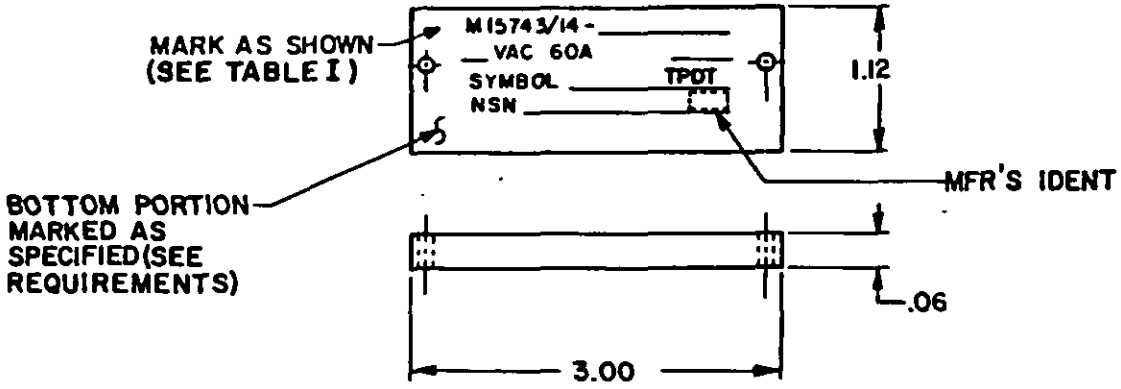

C. Identification plate. (21)

FIGURE 13. Information and identification plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating:

(a) Symbol 853 500 Va.c., 0-60 ampere, 60 Hz.

(b) Symbol 854 125 Va.c., 0-60 ampere, 60 Hz.

Dimensions and configuration: See figures 1 through 10.

Wiring diagram: See figure 11.

Mounting dimensions: See figure 10.

Degree of enclosure: Watertight.

Weight: 32 pounds maximum.

Designation and marking: See figures 11, 12, and 13.

Identification data shall be as shown on figure 13. Unless otherwise specified in the ordering data, bottom portion of the identification plate shall be blank as shown on figure 13.

Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part numbers and general information are as shown in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
M15743/14-001	853	TPDT	6SR3B4	5	1 and 2
M15743/14-002	854	TPDT	6SR3B4	5	1 and 2

1/ NAVSEA Drawing 815-1197225, in part.

ORDERING DATA:

Acquisition documents should specify the following:

Additional identification plate marking, if required (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no.1/	Description	Quantity M15743/14- 001	002	Material/specification	Remarks
01	Switch, enclosed (sym 853)	-			See figure 1
02	Switch, enclosed (sym 854)		-		See figure 1
03	Enclosure	1	1	Brass, MIL-E-24142/6 (modified)	See figure 2 & 3 M24142/6-001
04	O-ring	1	1	MS28775-012	----
05	Cushion gasket	1	1	MIL-R-900, 40 durameter	See figure 4
06	Handle (type CFI-10)	1	1	Plastic, black, MIL-M-14	See figure 5
07	Shaft assembly	1	1	-----	See figure 6
08	Shaft	1	1	Ni-Cu alloy of QQ-N-281	See figure 7
09	Coupler	1	1	Brass, ASTM B 36, ASTM B 121	See figure 8
10	Coupler plate	1	1	CRES, class 304 or 316 of QQ-S-766	See figure 9
11	Wiring diagram	1	1	MIL-E-2036	See figure 11
12	Switch (type 6SR3B4)	1	1	MIL-S-15291/10	M15291/10-004
13	Cable clamp	2	2	Nylon, coml	----
14	Lamp, incandescent	4	4	MS15612-3	Industry no. TS-159
15	Light, indicator	2	-	MIL-L-3661/65	Style LH98/4
16	Light, indicator	-	2	MIL-L-3661/65	Style LH98/3
17	Target cap assy "ALT" and "NOR"	1 ea.	1 ea.	MIL-S-3661/52	Style LC38RNIM
18	Caution plate	-	1	ASTM B 36, ASTM B 121	See figure 12
20	Identification plate "ALT"	1	1	ASTM B 36, ASTM B 121	See figure 13a
21	Identification plate "NOR"	1	1	ASTM B 36, ASTM B 121	See figure 13b
22	Identification plate	1	1	ASTM B 36, ASTM B 121	See figure 13c

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5930-N746-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.