MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, WATERTIGHT, SNAP ACTION, PORTABLE, 500 VOLTS ALTERNATING CURRENT, 30 AMPERE, SYMBOL 817.1 (TPST)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-15743(SH).


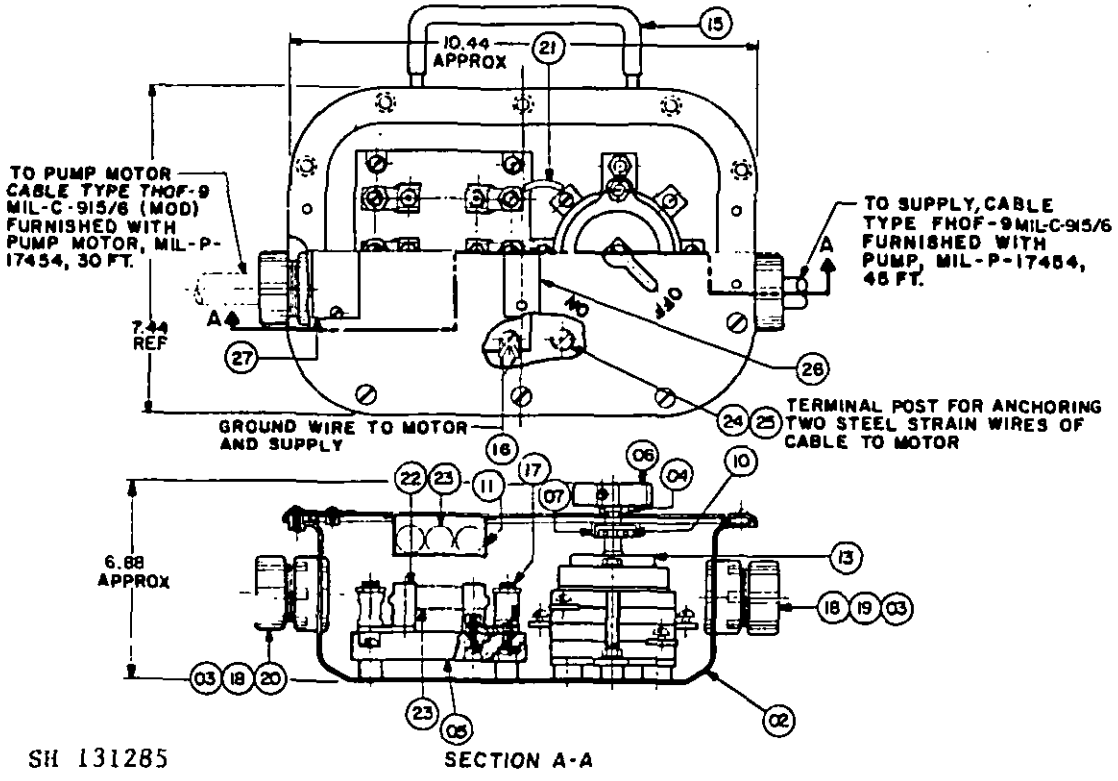


FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:00Z
Check the source to verify that this is the currentversion before use.

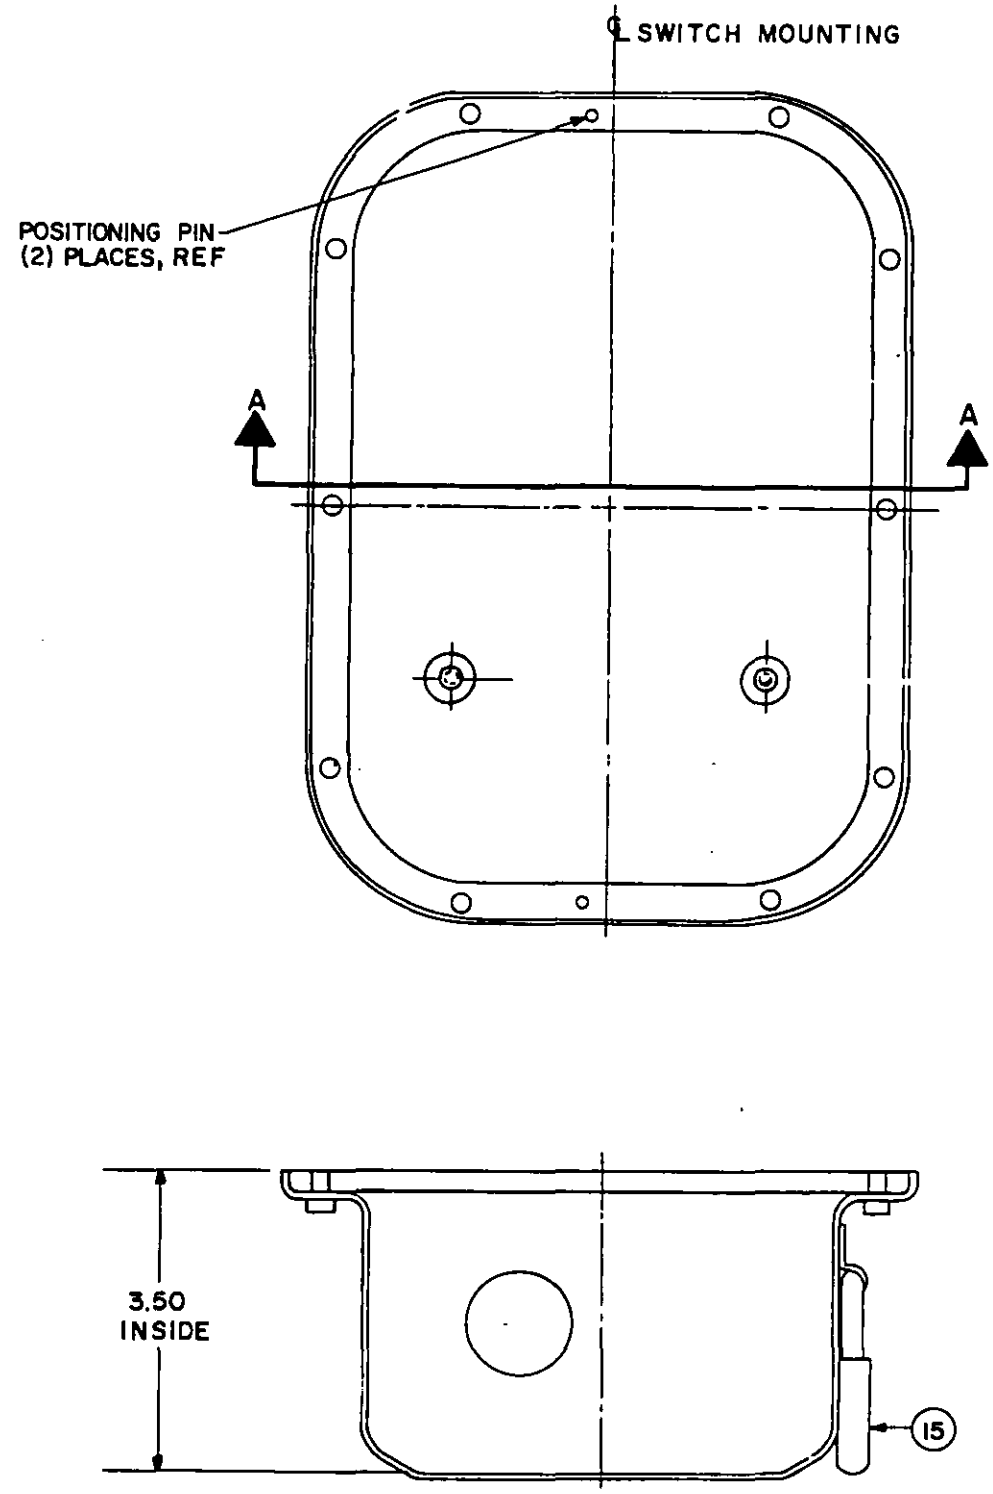


SH 131286

SECTION A-A

FIGURE 2. Box assembly, (modified).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

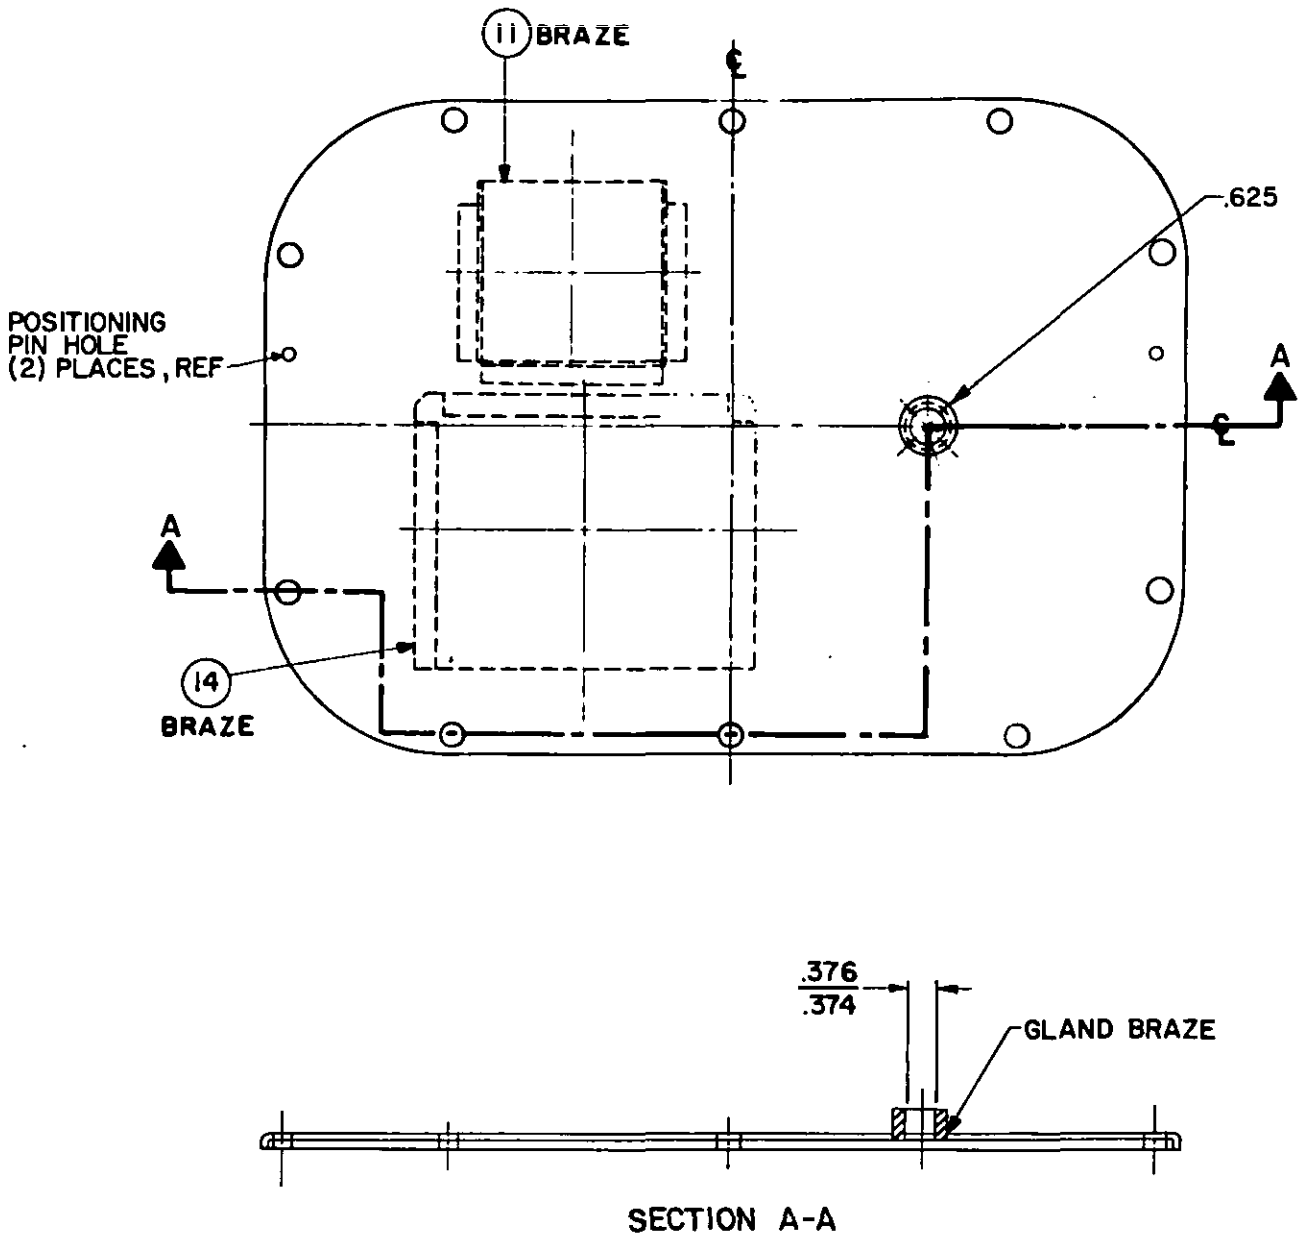

SH 131287


FIGURE 3. Cover assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

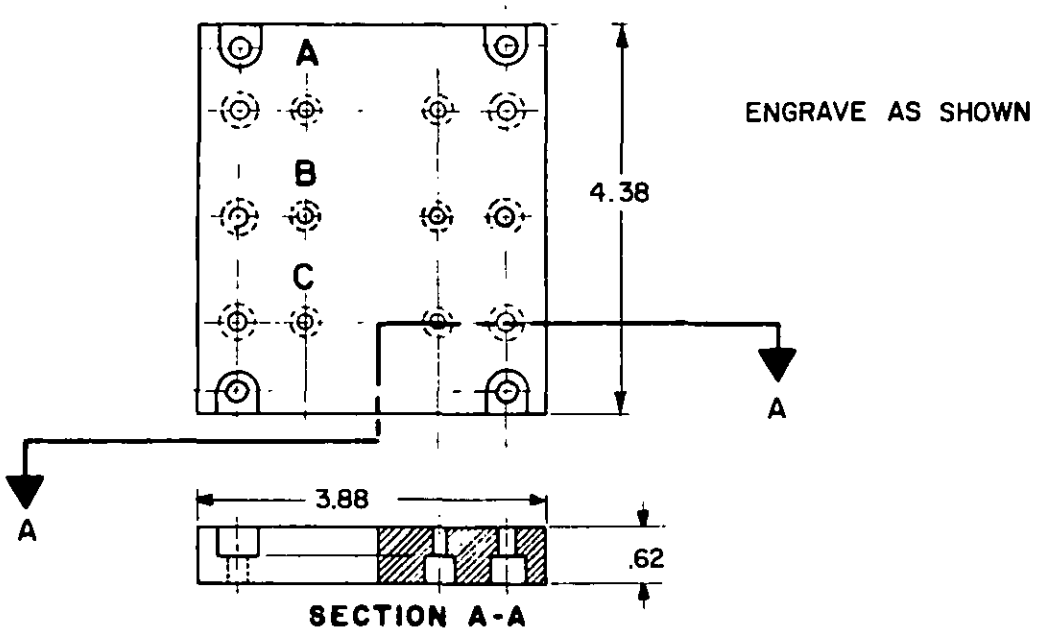

SH 131288


FIGURE 4. Base. (05)

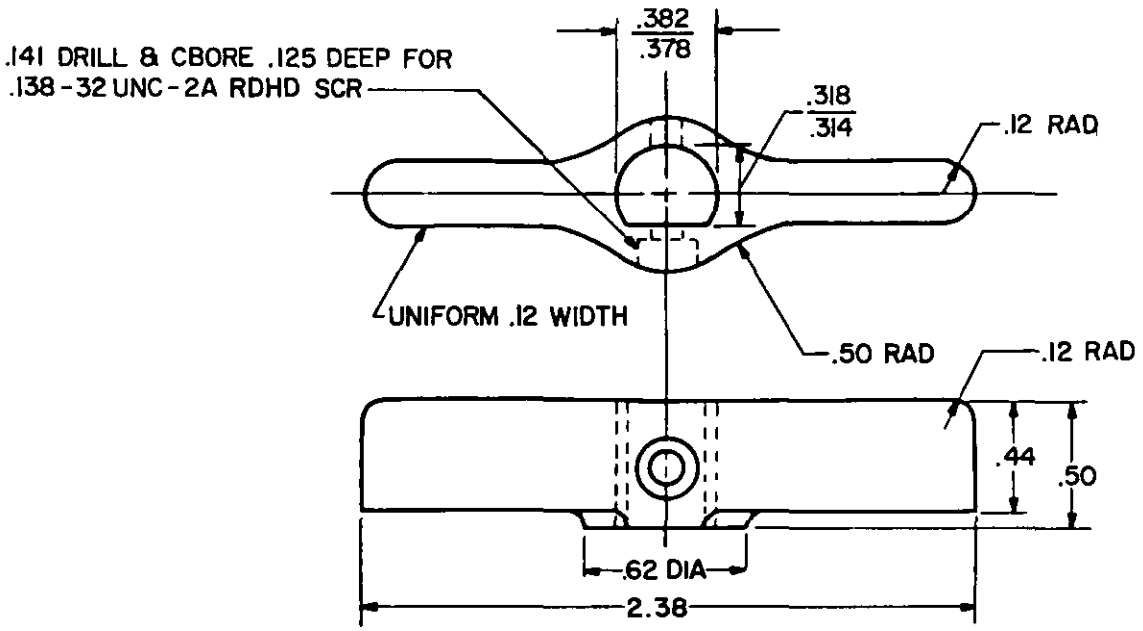

SH 131289


FIGURE 5. Handle (for switch). (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

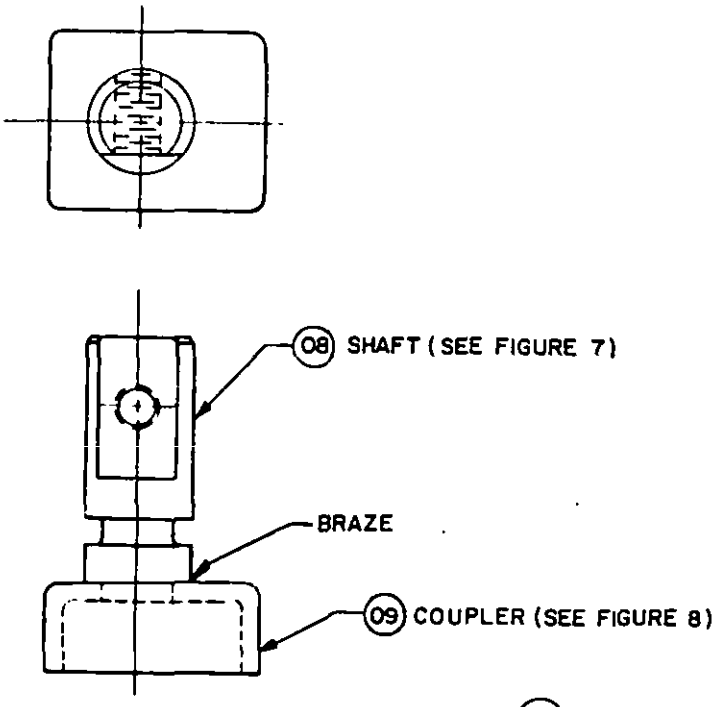


SH 131290

FIGURE 6. Shaft assembly. (07)

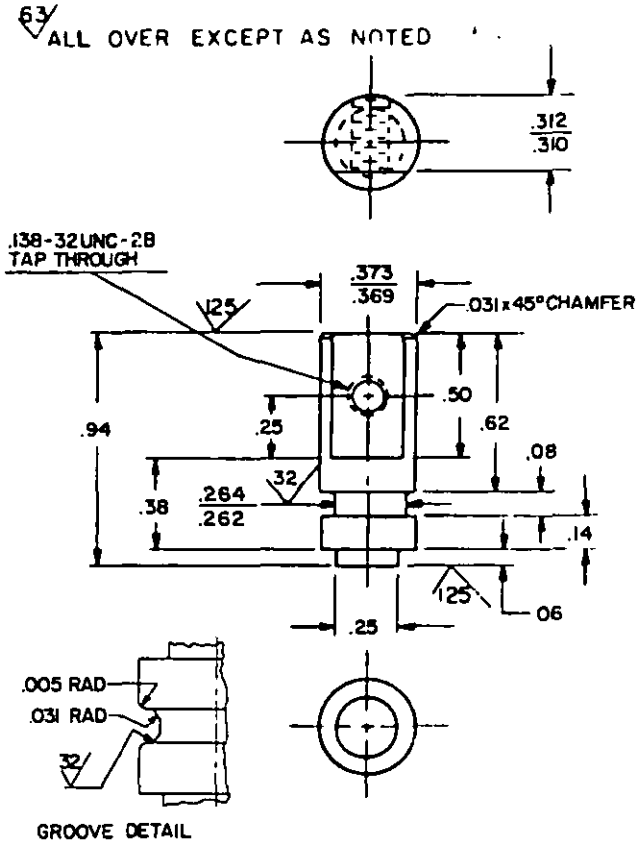

SH 131291


FIGURE 7. Shaft. (08)

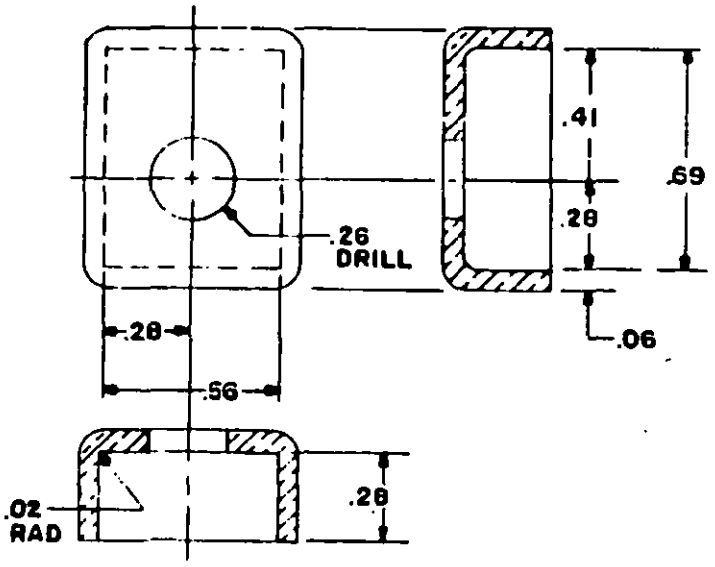

SH 131292


FIGURE 8. Coupler. (09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

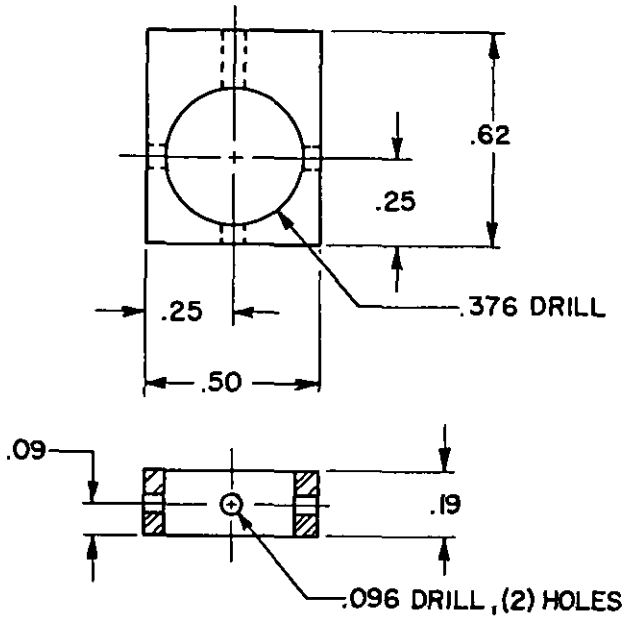

SH 131293


FIGURE 9. Coupler plate. (10)

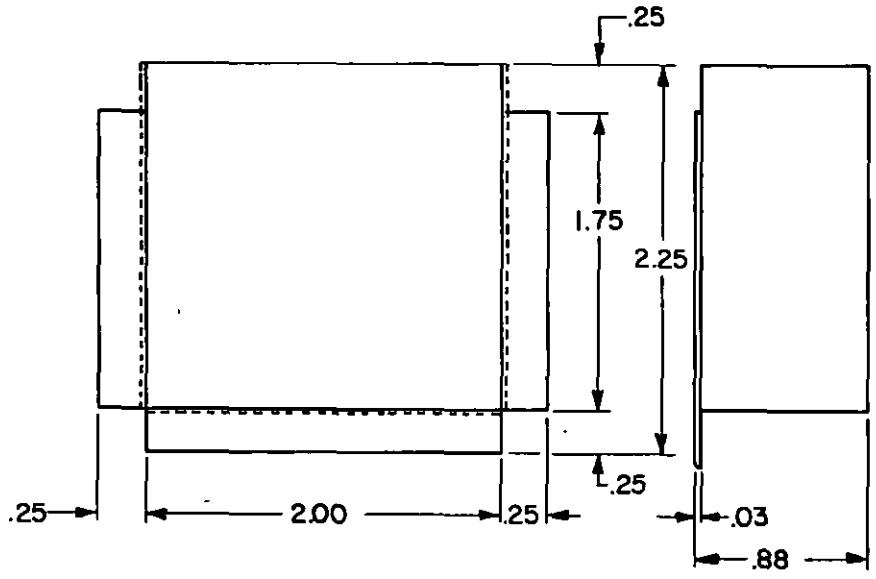

SH 131294

FIGURE 10. Fuse box. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

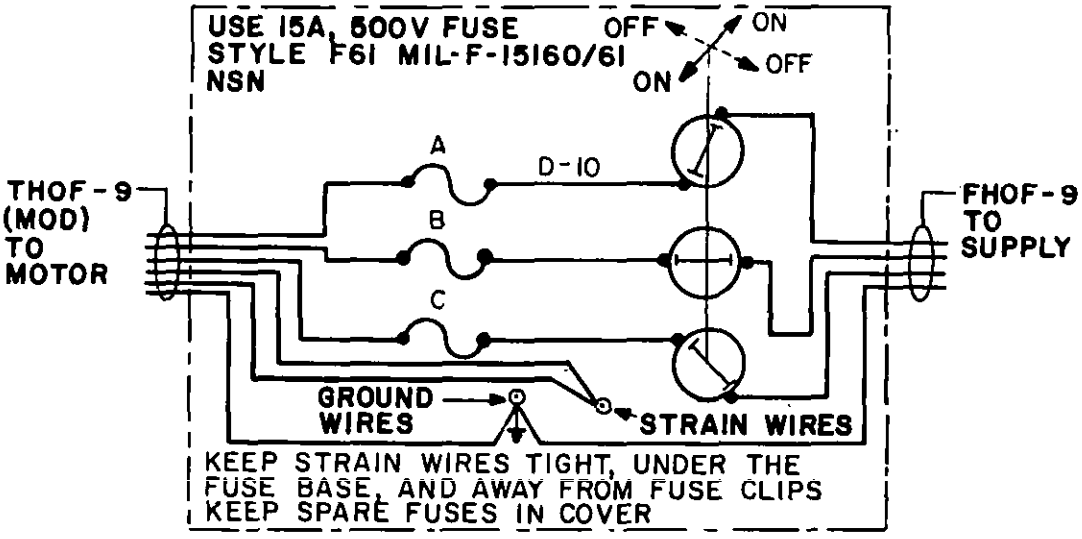


SH 131295

FIGURE 11. Wiring diagram. (12)



SH 131296

FIGURE 12. Warning plate. (26)

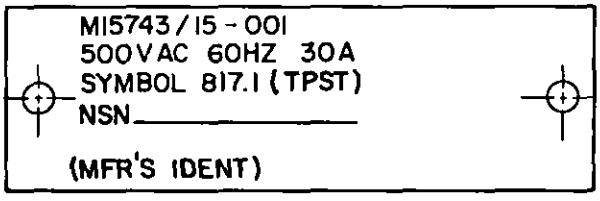

SH 131297

FIGURE 13. Identification plate. (27)

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 500 Va.c., 0-30 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 10.
Wiring diagrams: See figure 11.
Mounting dimensions: Not required for a portable unit.
Degree of enclosure: Watertight.
Weight: 10 pounds maximum.
Designation and marking: See figures 12 and 13.
Identification data shall be as shown on figures 3, 12 and 13. When specified in the ordering data, item 26 shall be furnished blank or marked as specified.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/				
			Type	Unit	Sheet	Revision	Date
2/M15743/15-001	817.1	TPST	3SR4D4-3			C	7/13/62

1/ NAVSEA Drawing 815-1197083.
2/ This switch is intended to be used with portable submersible pumps in accordance with MIL-P-17454. The switch is connected to a power supply (using MIL-R-2726/19 or MIL-R-2726/49 receptacles) through a plug (MIL-R-2726/3) at the end of the FHOF-9 in one cable. The THOF-9 (mod) cable is connected to the motor of the pump (see figure 17).

ORDERING DATA:

Acquisition documents should specify the following:
If item 26 is to be furnished blank or marked other than shown on figure 12 (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/15-001	Material/specification	Remarks
01	Switch, enclosed (sym 817.1)	-	-----	See figure 1
02	Enclosure	1	Brass, MIL-E-24142/3	M24142/3-001 Mod 2/
03	O-ring	2	MS28775-220	----
04	O-ring	1	MS28775-010	----
05	Base	1	GME of MIL-P-15037 of (see MIL-S-15743)	See figure 4
06	Handle, switch	1	Copper alloy 854 of QQ-C-390	See figure 5
07	Shaft assembly	1	-----	See figure 6
08	Shaft	1	Ni-Cu alloy of QQ-N-281	See figure 7
09	Coupler	1	Brass, alloy 260 of QQ-B-613	See figure 8
10	Coupler plate	1	CRES, class 304 or 316 of QQ-S-766	See figure 9
11	Fuse box	1	Brass, coml	See figure 10
12	Wiring diagram	1	MIL-E-2036	See figure 11
13	Switch (type 3SR3A4)	1	MIL-S-15291/7	M15291/7-005
14	Wiring diagram holder	1	MIL-E-24142	----
15	Handle, box	1	Brass, coml	----
16	Wire terminal	2	L-36 of MIL-T-16366	Tongue shape
17	Terminal assembly	6	9000-S6202-73055-42	----
18	Stuffing tube assembly size 4T	2	MIL-S-19622/1	M19622/1-005
19	Packing	1	MIL-S-19622/19	M19622/19-005
20	Packing	1	MIL-S-19622/19	M19622/19-004
21	Wire	as required	MIL-W-16878/3	M16878/3BMG8
22	Fuse clip (type FC2DIF)	6	MIL-F-21346/1	M21346/1-06
23	Fuse 15A 500 V	6	Style F61 of MIL-F-15160/61	----
24	Lockwasher for 0.250 screw		Brass, coml	----
25	Screw .250-20UNC-2A RDH		Brass, coml	----
26	Warning plate	1	Brass, QQ-B-613	See figure 12
27	Identification plate	1	Brass, QQ-B-613	See figure 13

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Modified enclosure (see figures 2 and 3).

Preparing activity:
Navy - SH
(Project 5930-N584-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.