INCH-POUND
MIL-S-15743/15A(SH)
22 November 1993
SUPERSEDING
MIL-S-15743/15(SH)
27 August 1984

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, WATERTIGHT, SNAP ACTION, PORTABLE, 500 VOLTS ALTERNATING CURRENT, 30 AMPERE, SYMBOL 817.1 (TPST)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15743.

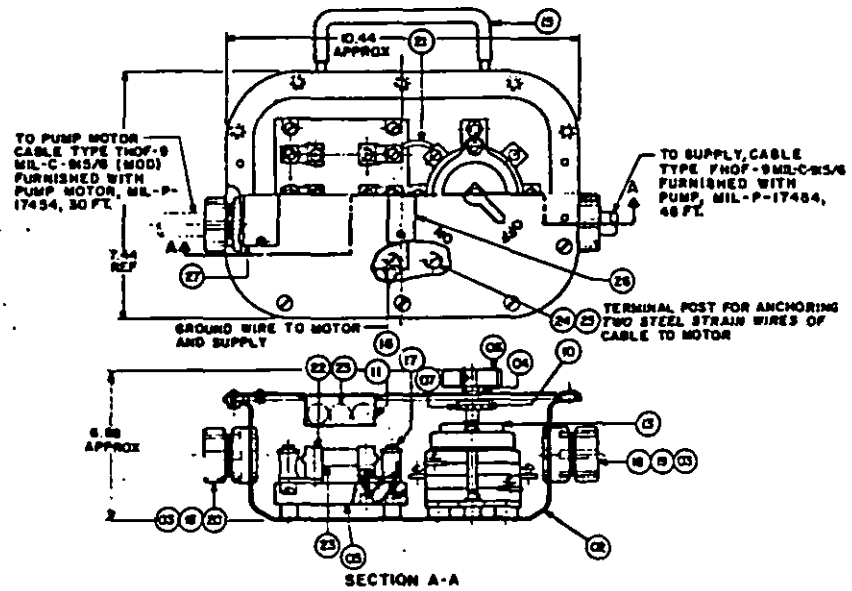



FIGURE 1. Switch, enclosed. (01)


NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

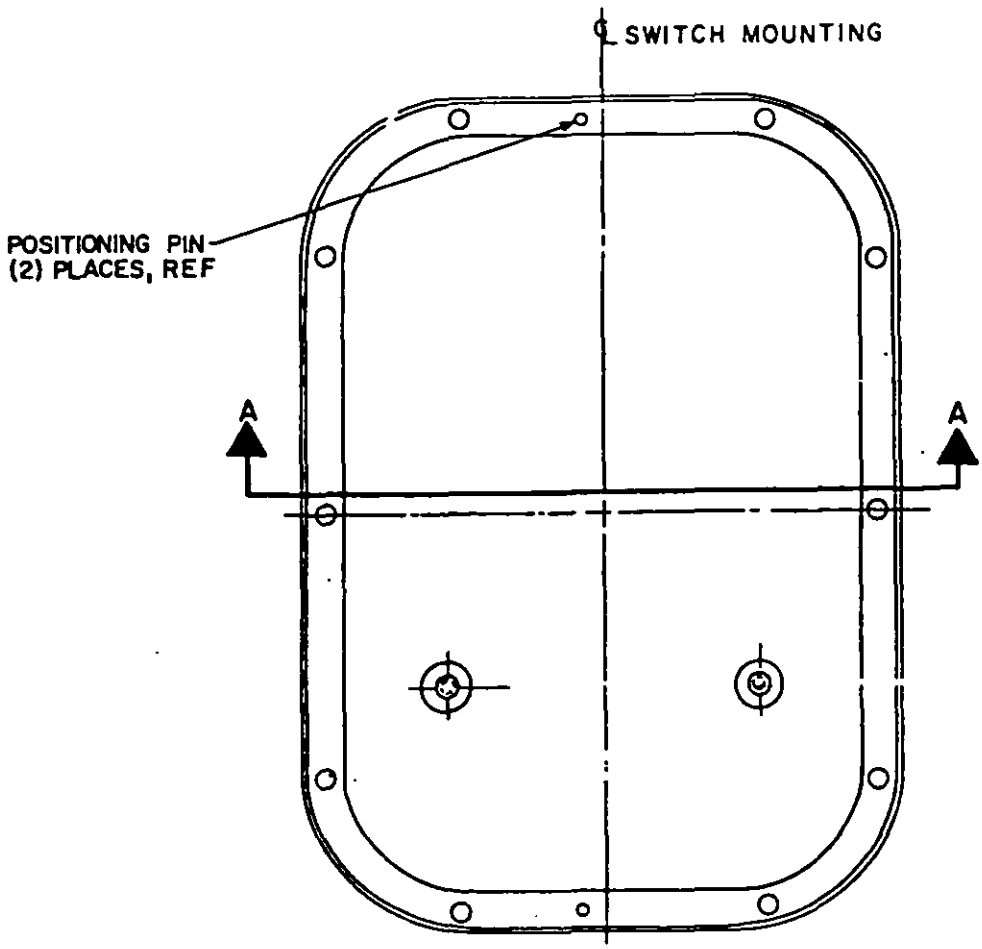

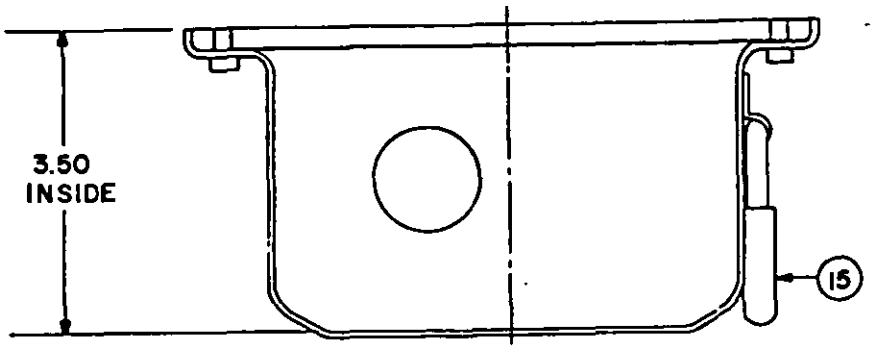

SECTION A-A

FIGURE 2. Box assembly (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

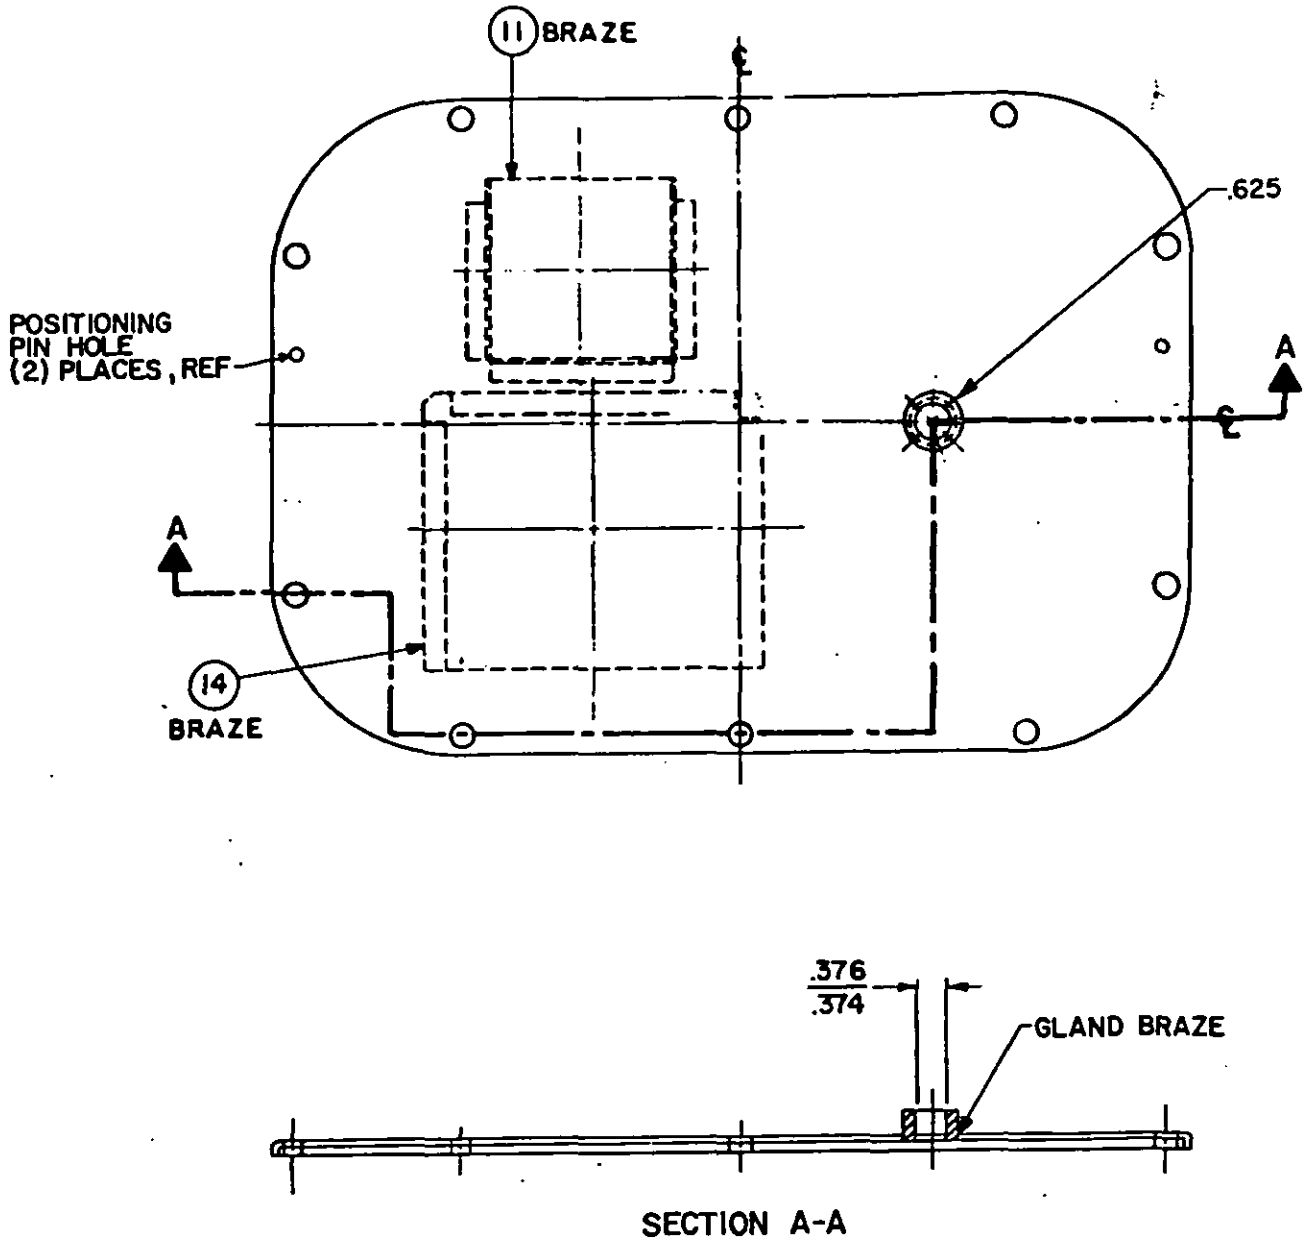


FIGURE 3. Cover assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

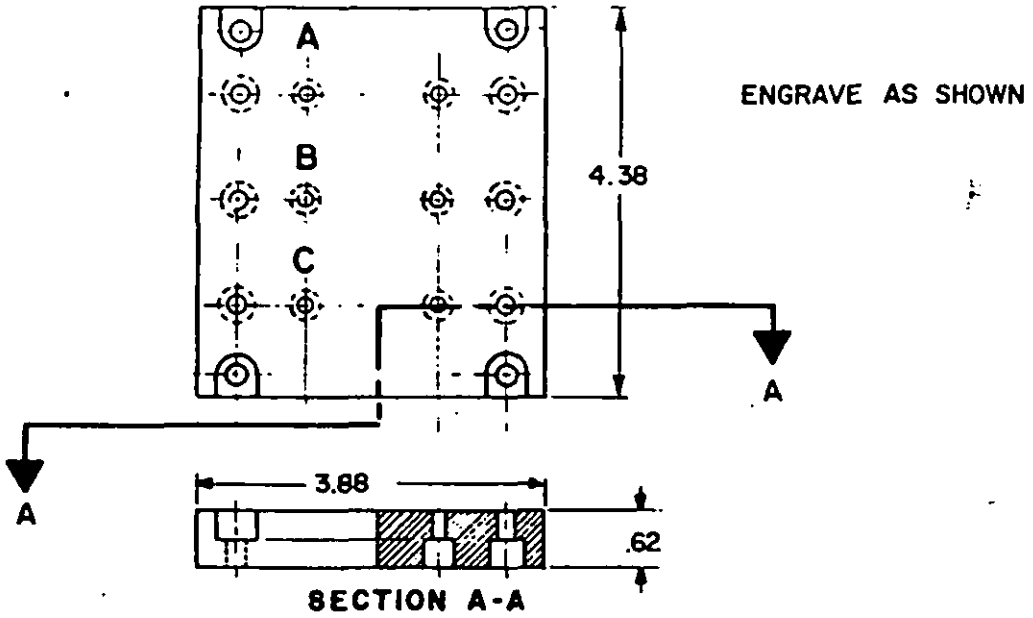


FIGURE 4. Base. (05)

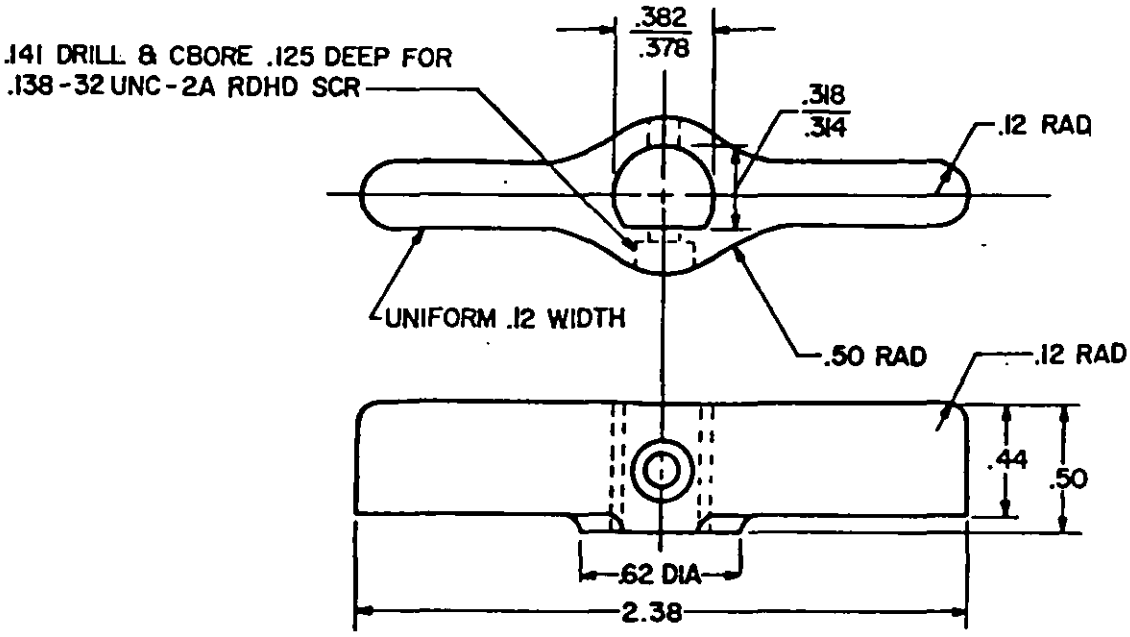


FIGURE 5. Handle (for switch). (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

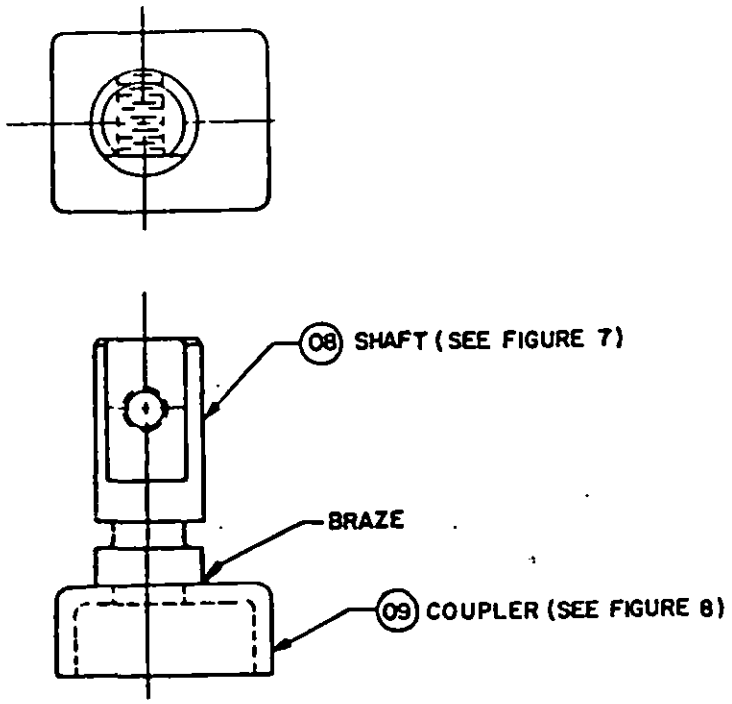


FIGURE 6. Shaft assembly. (07)

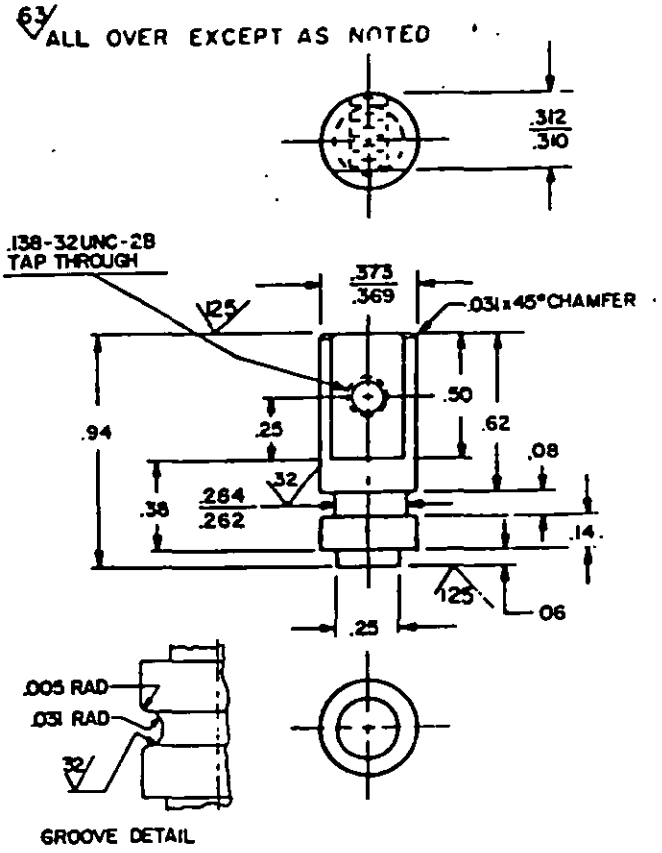


FIGURE 7. Shaft. (08)

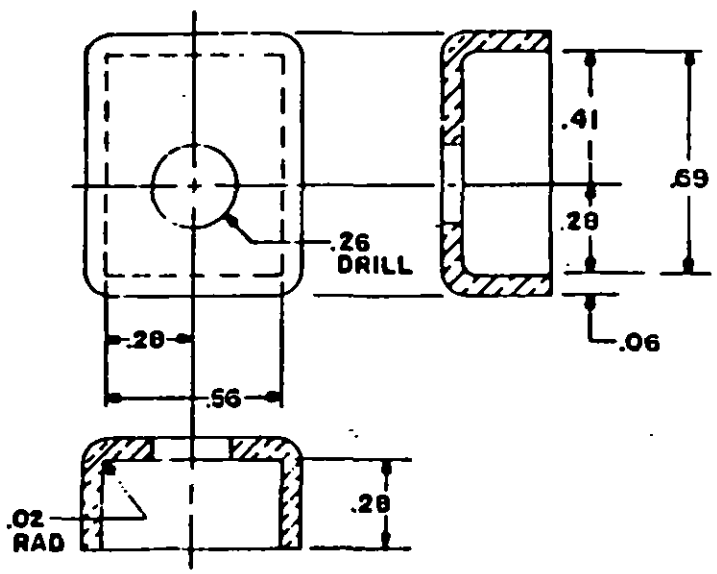


FIGURE 8. Coupler. (09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

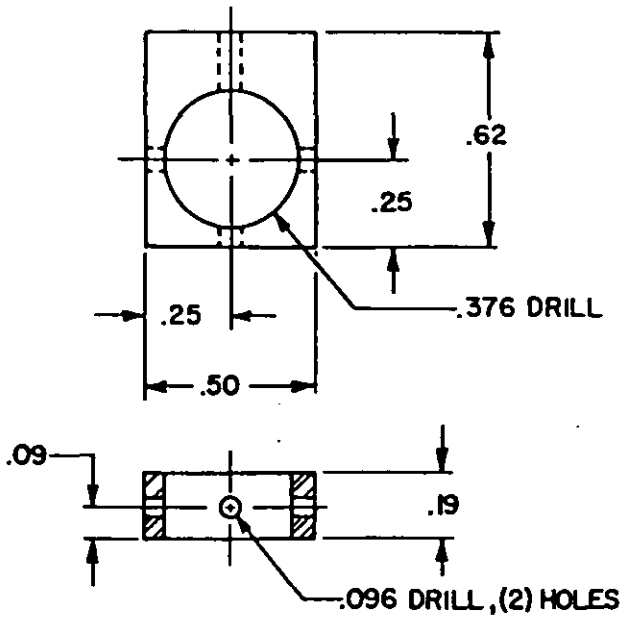


FIGURE 9. Coupler plate. (10)

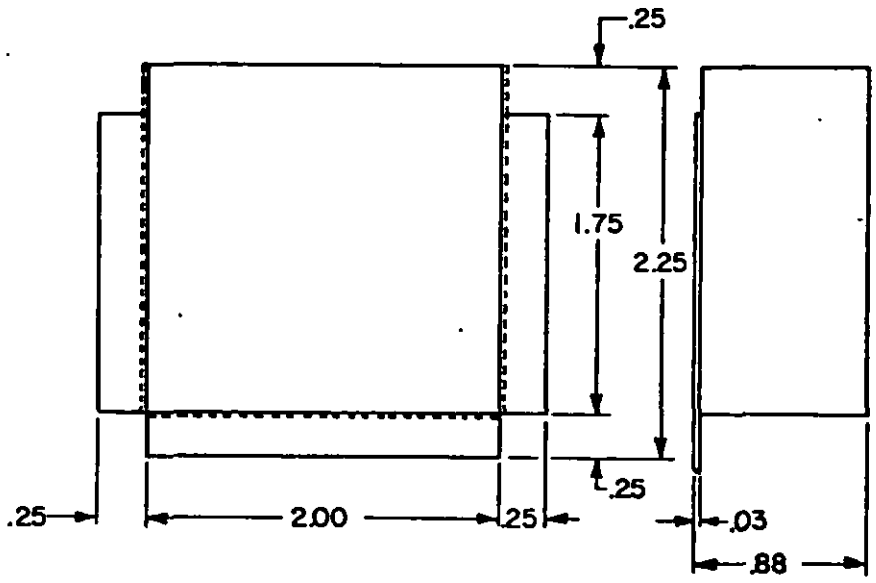


FIGURE 10. Fuse box. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

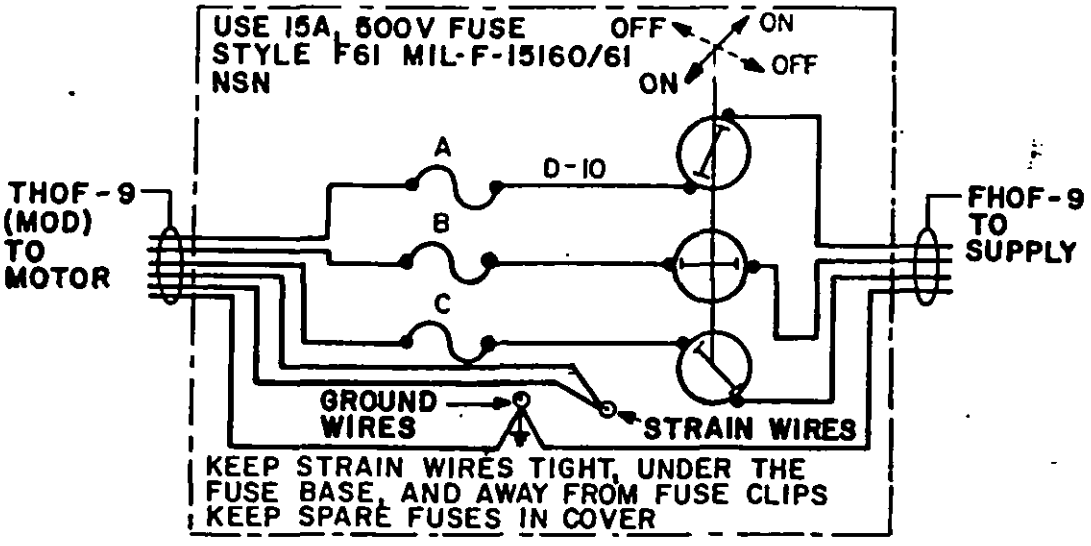


FIGURE 11. Wiring diagram. (12)



FIGURE 12. Warning plate. (26)

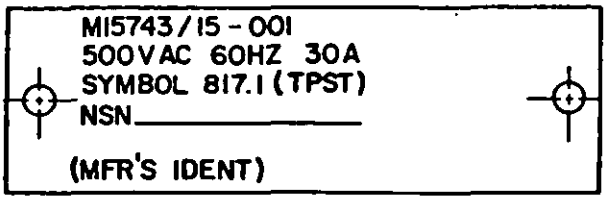


FIGURE 13. Identification plate. (27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 500 Va.c., 0-30 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 10.
Wiring diagram: See figure 11.
Mounting dimensions: Not required for a portable unit.
Degree of enclosure: Watertight.
Weight: 10 pounds maximum.
Designation and marking: See figures 12 and 13.
Identification data shall be as shown on figures 4, 12 and 13. When specified in the ordering data, item 26 shall be furnished blank or marked as specified.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/		
			Type	Unit	Sheet
2/ M15743/15-001	817.1	TPST	3SR4D4-3		

1/ NAVSEA Drawing 815-1197083.
2/ This switch is intended to be used with portable submersible pumps in accordance with MIL-P-17454. The switch is connected to a power supply (using MIL-R-2726/19 or MIL-R-2726/49 receptacles) through a plug (MIL-R-2726/3) at the end of the FHOF-9 in one cable. The THOF-9 (mod) cable is connected to the motor of the pump.

ORDERING DATA:

Acquisition documents should specify the following:
If item 26 is to be furnished blank or marked other than shown on figure 12 (see requirements).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/15-001	Material/specification	Remarks
01	Switch, enclosed (sym 817.1)	-	----	See figure 1
02	Enclosure	1	Brass, MIL-E-24142/3 (modified)	See figure 2 & 3 M24142/3-001
03	O-ring	2	MS28775-220	----
04	O-ring	1	MS28775-010	----
05	Base	1	GME of MIL-P-15037 (see MIL-S-15743)	See figure 4
06	Handle, switch	1	Copper alloy ASTM B 584	See figure 5
07	Shaft assembly	1	----	See figure 6
08	Shaft	1	Ni-Cu alloy of QQ-N-281	See figure 7
09	Coupler	1	Brass, ASTM B 36, ASTM B 121	See figure 8
10	Coupler plate	1	CRES, class 304 or 316 of QQ-S-766	See figure 9
11	Fuse box	1	Brass, coml	See figure 10
12	Wiring diagram	1	MIL-E-2036	See figure 11
13	Switch (type 3SR3A4)	1	MIL-S-15291/7	M15291/7-005
14	Wiring diagram holder	1	MIL-E-24142	----
15	Handle, box	1	Brass, coml	----
16	Wire terminal	2	L-36 of MIL-T-16366	Tongue shape
17	Terminal assembly	6	9000-S6202-73055-42	----
18	Stuffing tube assembly size 4T	2	MIL-S-19622/1	M19622/1-005
19	Packing	1	MIL-S-19622/19	M19622/19-005
20	Packing	1	MIL-S-19622/19	M19622/19-004
21	Wire	as required	MIL-W-16878/3	M16878/3BMG8
22	Fuse clip (type FC2DIF)	6	MIL-F-21346/1	M21346/1-06
23	Fuse 15A 500 V	6	Style F61 of MIL-F-15160/61	----
24	Lockwasher for 0.250 screw		Brass, coml	----
25	Screw .250-20UNC-2A RDH		Brass, coml	----
26	Warning plate	1	ASTM B 36, ASTM B 121	See figure 12
27	Identification plate	1	ASTM B 36, ASTM B 121	See figure 13

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5930-N746-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:00Z
Check the source to verify that this is the current version before use.