
MIL-S-15743/20(SH)
27 August 1984
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, ENCLOSED, SUBMERSIBLE (15 FEET), CONTACT MAKER, SIX-POLE, THREE-POSITION, SPRING RETURN, 125 VOLTS ALTERNATING CURRENT, 10 AMPERE, SYMBOL 2641.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-15743(SH).

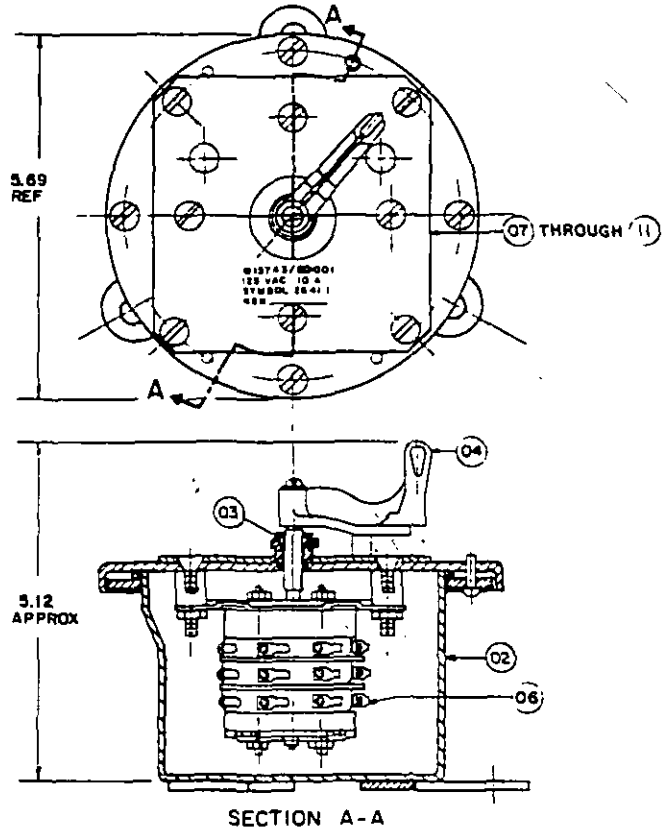


SH 131330

FIGURE 1. Switch, enclosed. (01)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 202610-18T08:01Z
Check the source to verify that this is the current version before use.

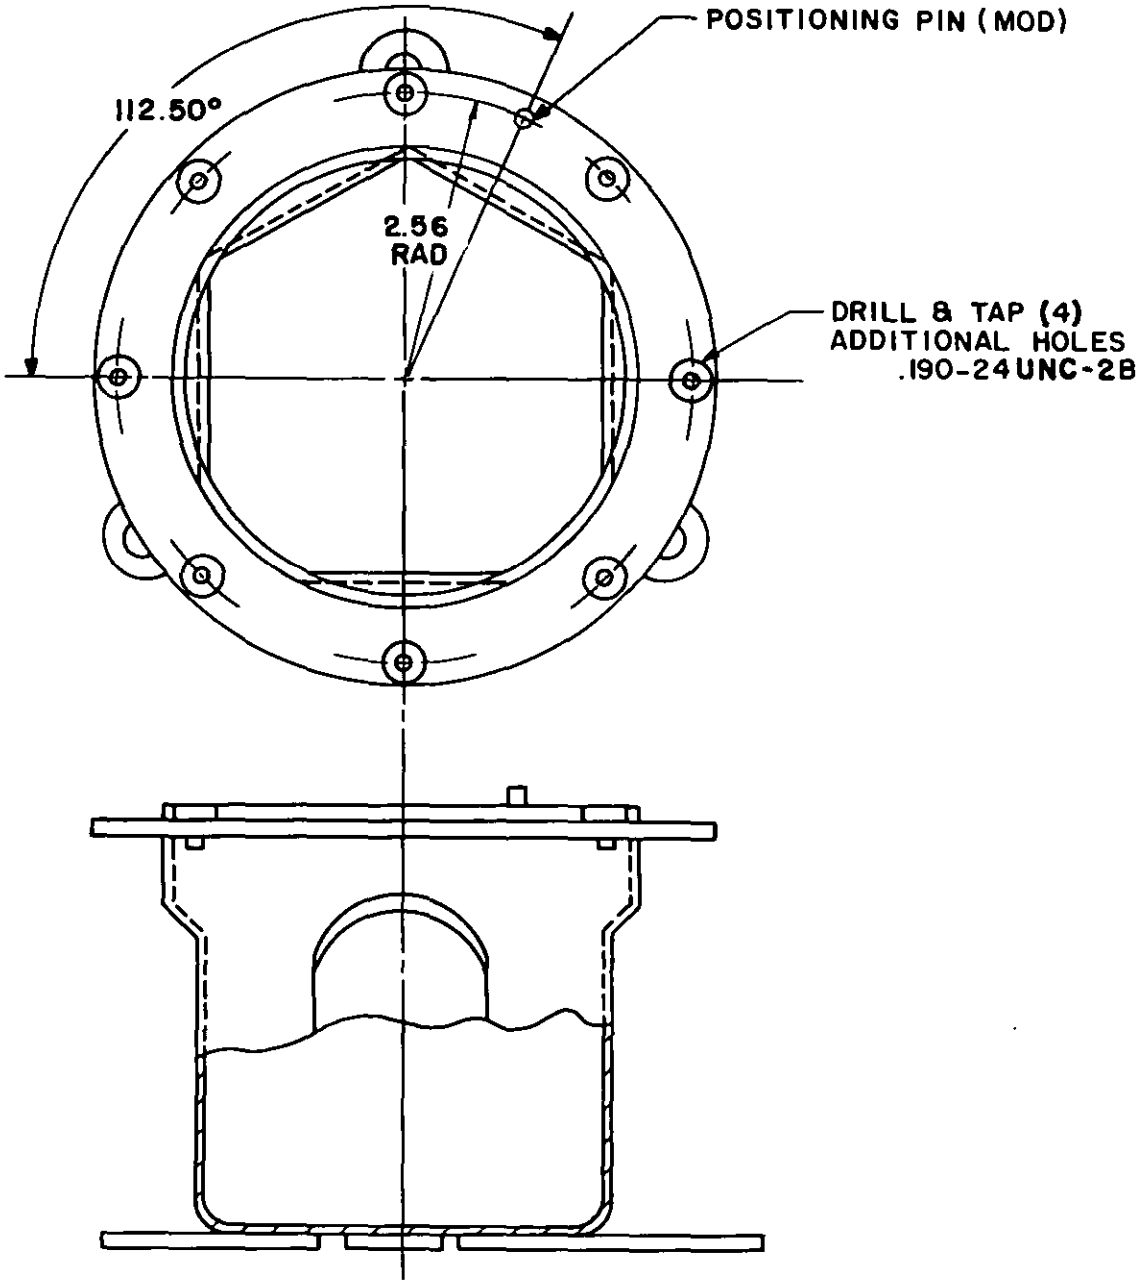

SH 131331

FIGURE 2. Box assembly, (modified).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

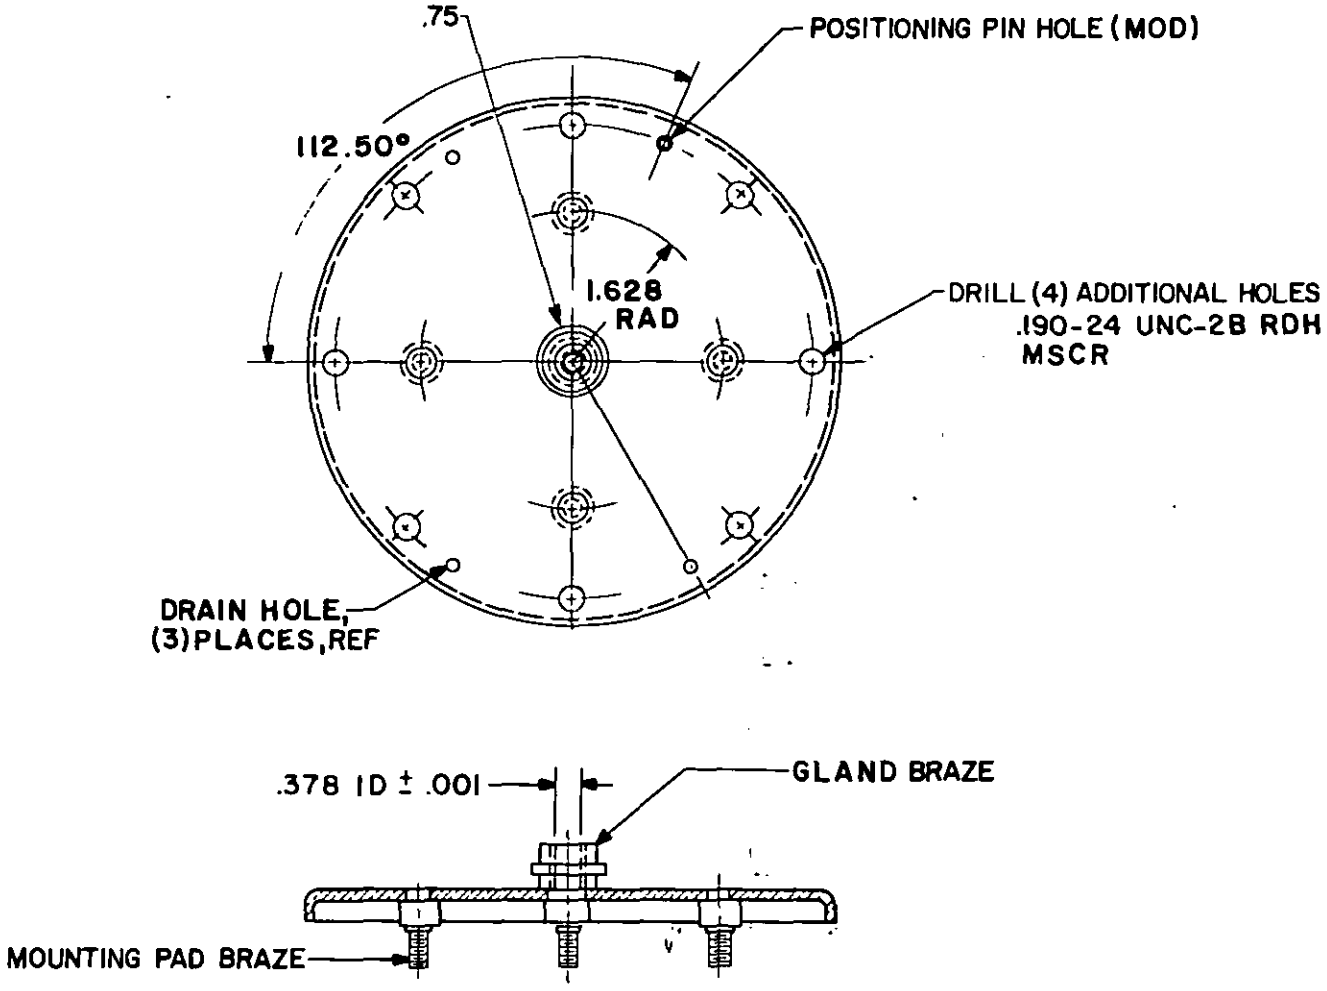

SH 131332


FIGURE 3. Cover assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

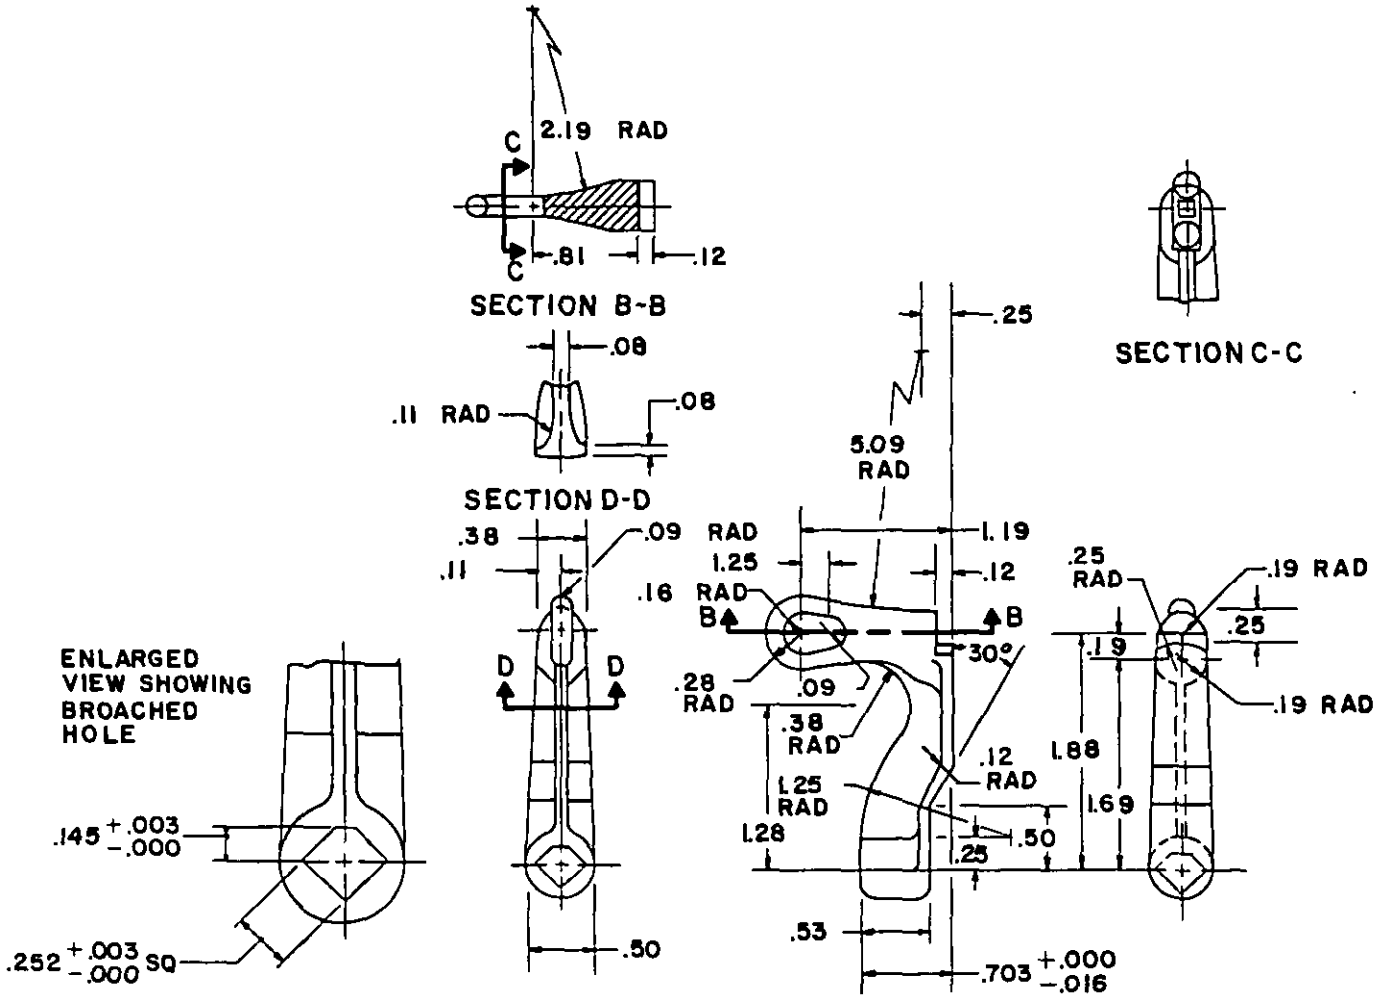

SH 131333


FIGURE 4. Handle. (04)

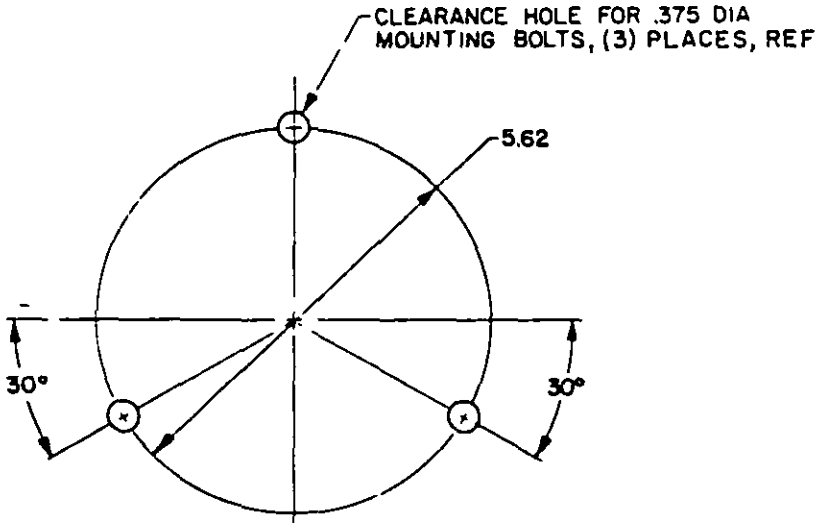

SH 131334

FIGURE 5. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

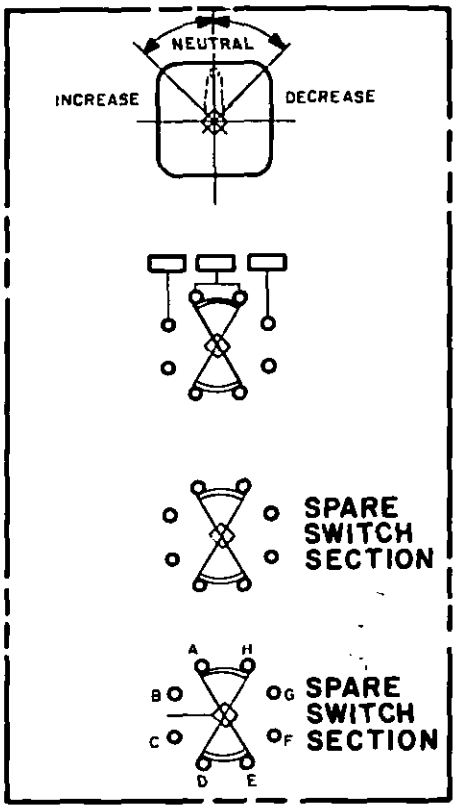


SH 131335

FIGURE 6. Wiring diagram. (05)

(as viewed from back of switch)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

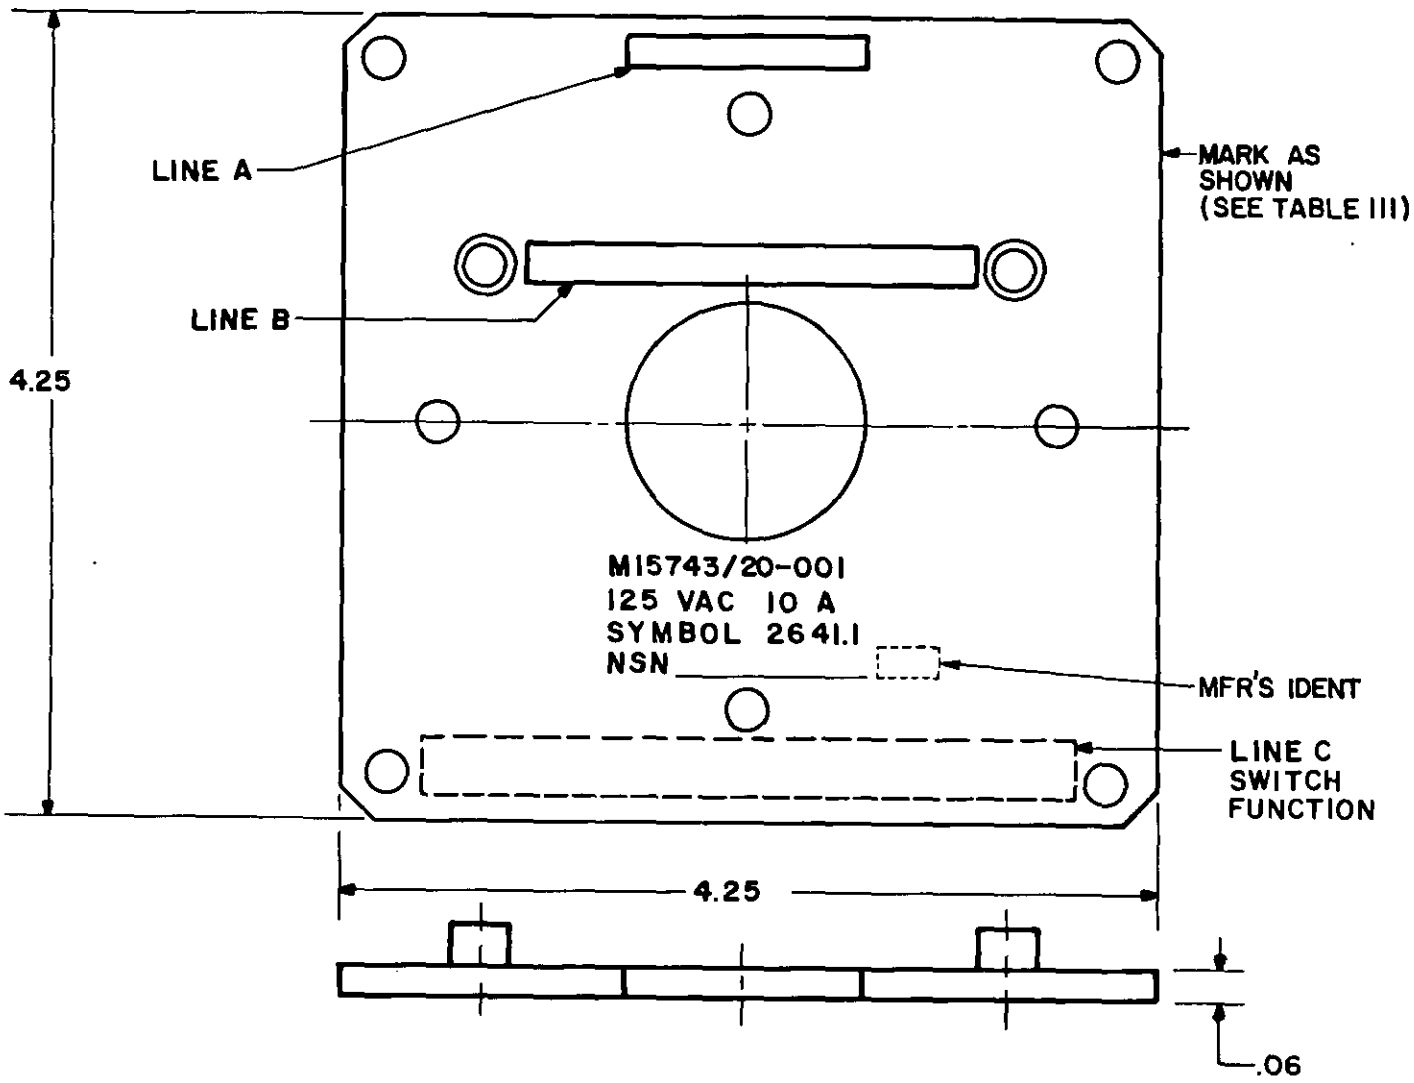

SH 131336

FIGURE 7. Identification plate. (07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-10 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 4.
Wiring diagram: See figure 6.
Mounting dimensions: See figure 5.
Degree of enclosure: Submersible (15 feet).
Weight: 4 pounds maximum.
Designation and marking: See figure 7. Unless otherwise specified in the ordering data, identification data shall be as shown on figure 7. Switch action marking shall be as shown on figure 6.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switch specified herein.

GENERAL INFORMATION:

Military part number and general information are as shown in table I.

TABLE I. Military part number and general information.

Military part no.	Symbol no.	No. of poles and switching characteristics	Supersedes 1/				
			Type	Unit	Sheet	Revision	Date
M15743/20-001	2641.1	Six-pole, 3 position	S2JRM3B-2			H	7/10/80

1/ NAVSEA Drawing 803-74055, in part.

ORDERING DATA:

Acquisition documents should specify the following:

(a) Identification plate required (see table III).
(b) Wiring diagram, when ordering identification plates 07, 09, 10, or 11 (see table III).

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/20-001	Material/specification	Remarks
01	Switch, enclosed (sym 2641.1)	-	-----	See figure 1
02	Enclosure	1	Brass, MIL-E-24142/5	M24142/5-002 Mod 2/
03	Seal	1	-----	----
04	Handle	1	Brass, QQ-B-613	See figure 4
05	Wiring diagram	1	MIL-E-2036	See figure 6
06	Switch (type JRM 300)	1	MIL-S-21604/7	
07 thru 11	Identification plate	1 ea.	Brass, QQ-B-613	See figure 7

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:01Z
Check the source to verify that this is the current version before use.

1/ Numbers in circles shown on figures are the same as item numbers shown in this table.
2/ Modified enclosure to change location of positioning pin and hole (see figures 2 and 3).

TABLE III. Switch function marking.

Identification plate item no.1/	Line A	Line B2/	Line C	Wiring diagram
07	Blank	----	----	As required3/
08	Neutral	Decrease - Increase	Manual log Controller	See figure 6
09	Off	Start - Feed Emergency Started Feed	Boiler Feed	As required3/
10	Off	Emergency- More Feed Feed Started	Boiler Feed	As required3/
11	Off	Red - Green	Traffic Control	As required3/

1/ Switch function shall be as specified in the ordering data. When not specified, or when enclosed switches are being ordered for stocking in the supply system, the switch function shall be blank (item 07).
2/ Engrave marking on line indicated but at opposite ends of the engraving area.

Preparing activity:
Navy - SH
(Project 5930-N584-20)

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:01Z
Check the source to verify that this is the current version before use.