
MIL-S-15743/22(SH)
27 August 1984
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, ENCLOSED, WATERTIGHT, 6-SECTION, 16-POSITION,
125 VOLTS ALTERNATING CURRENT, 5 AMPERE,
SYMBOLS 2785 (DECK MOUNTED) AND 2786 (BULKHEAD MOUNTED)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-15743(SH).

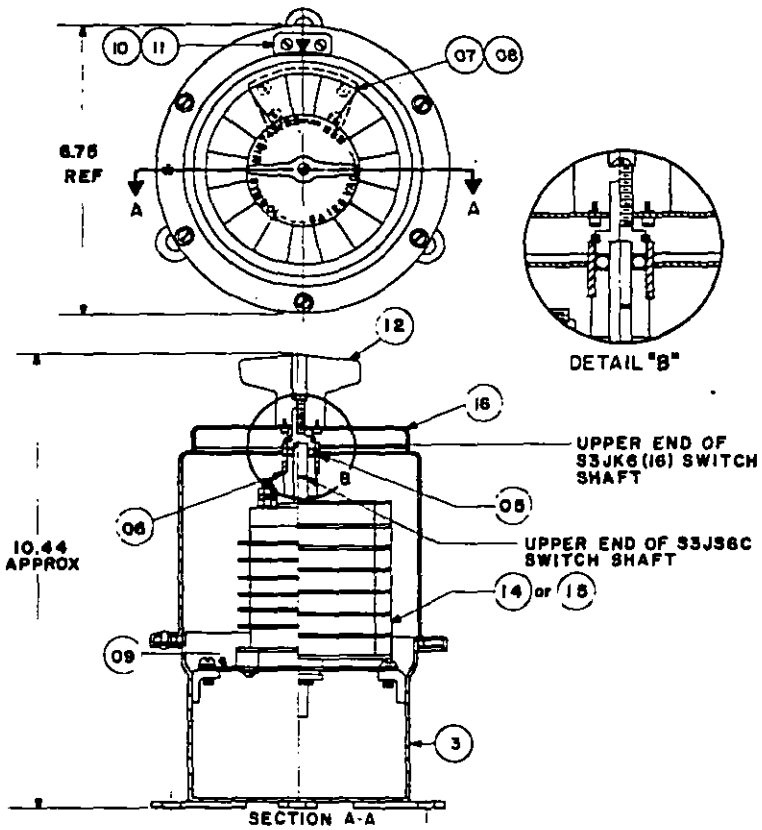


SH 131343

FIGURE 1. Switch, enclosed. (01) (02)
(-001 shown)

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.
   Angular dimensions - plus or minus 30 minutes.

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 202610-18T08:02Z
Check the source to verify that this is the current version before use.

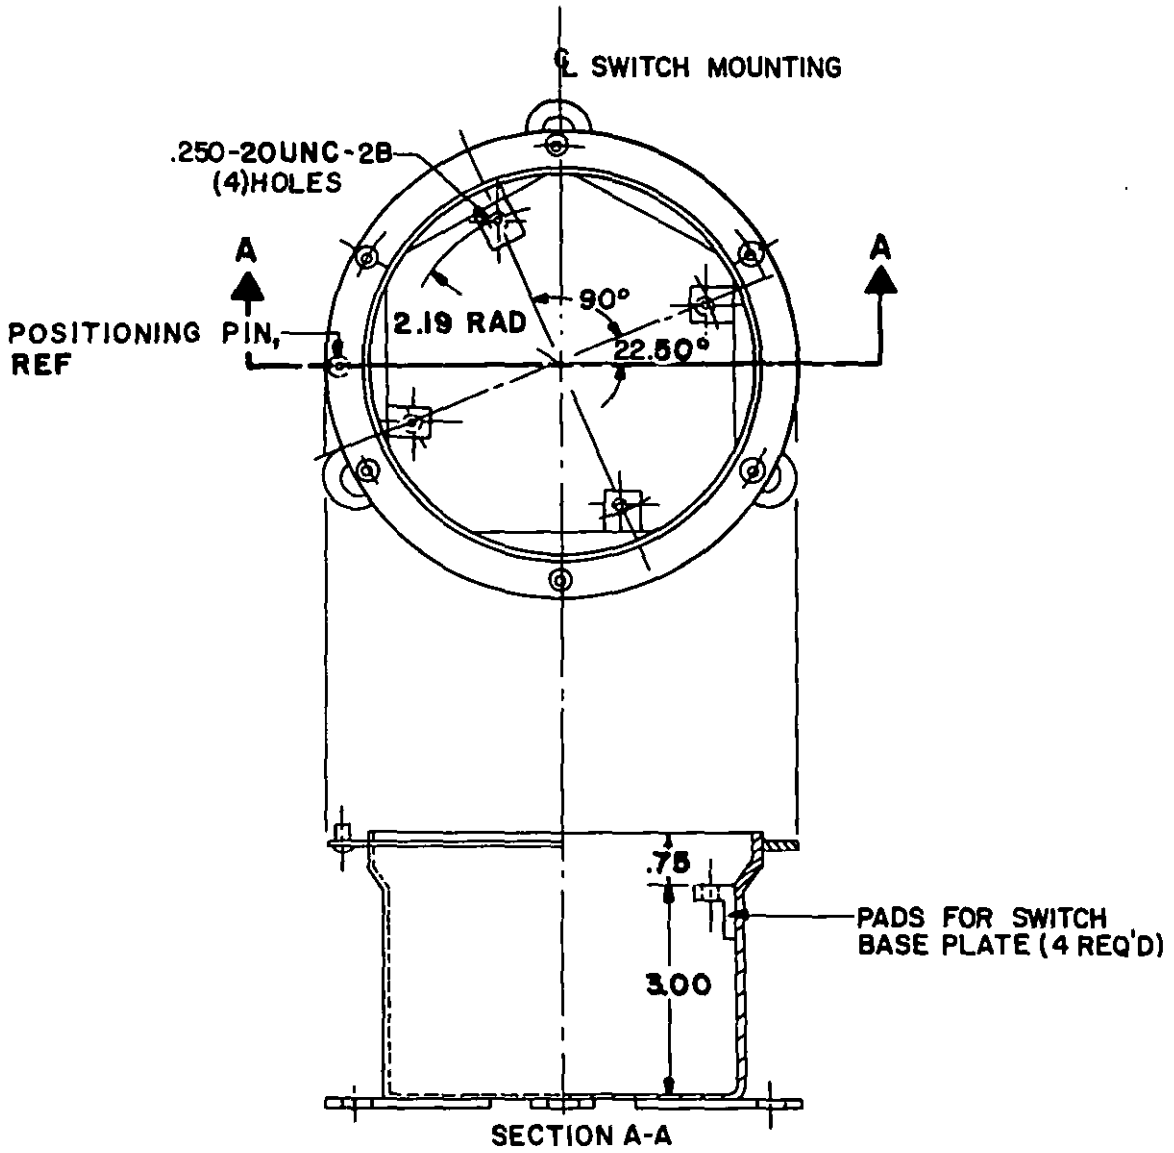

SH 131344

FIGURE 2. Box assembly, (symbol 2785). (03)


Source: https://assist.dla.mil -- Downloaded: 202640-18T08:02Z
Check the source to verify that this is the current version before use.

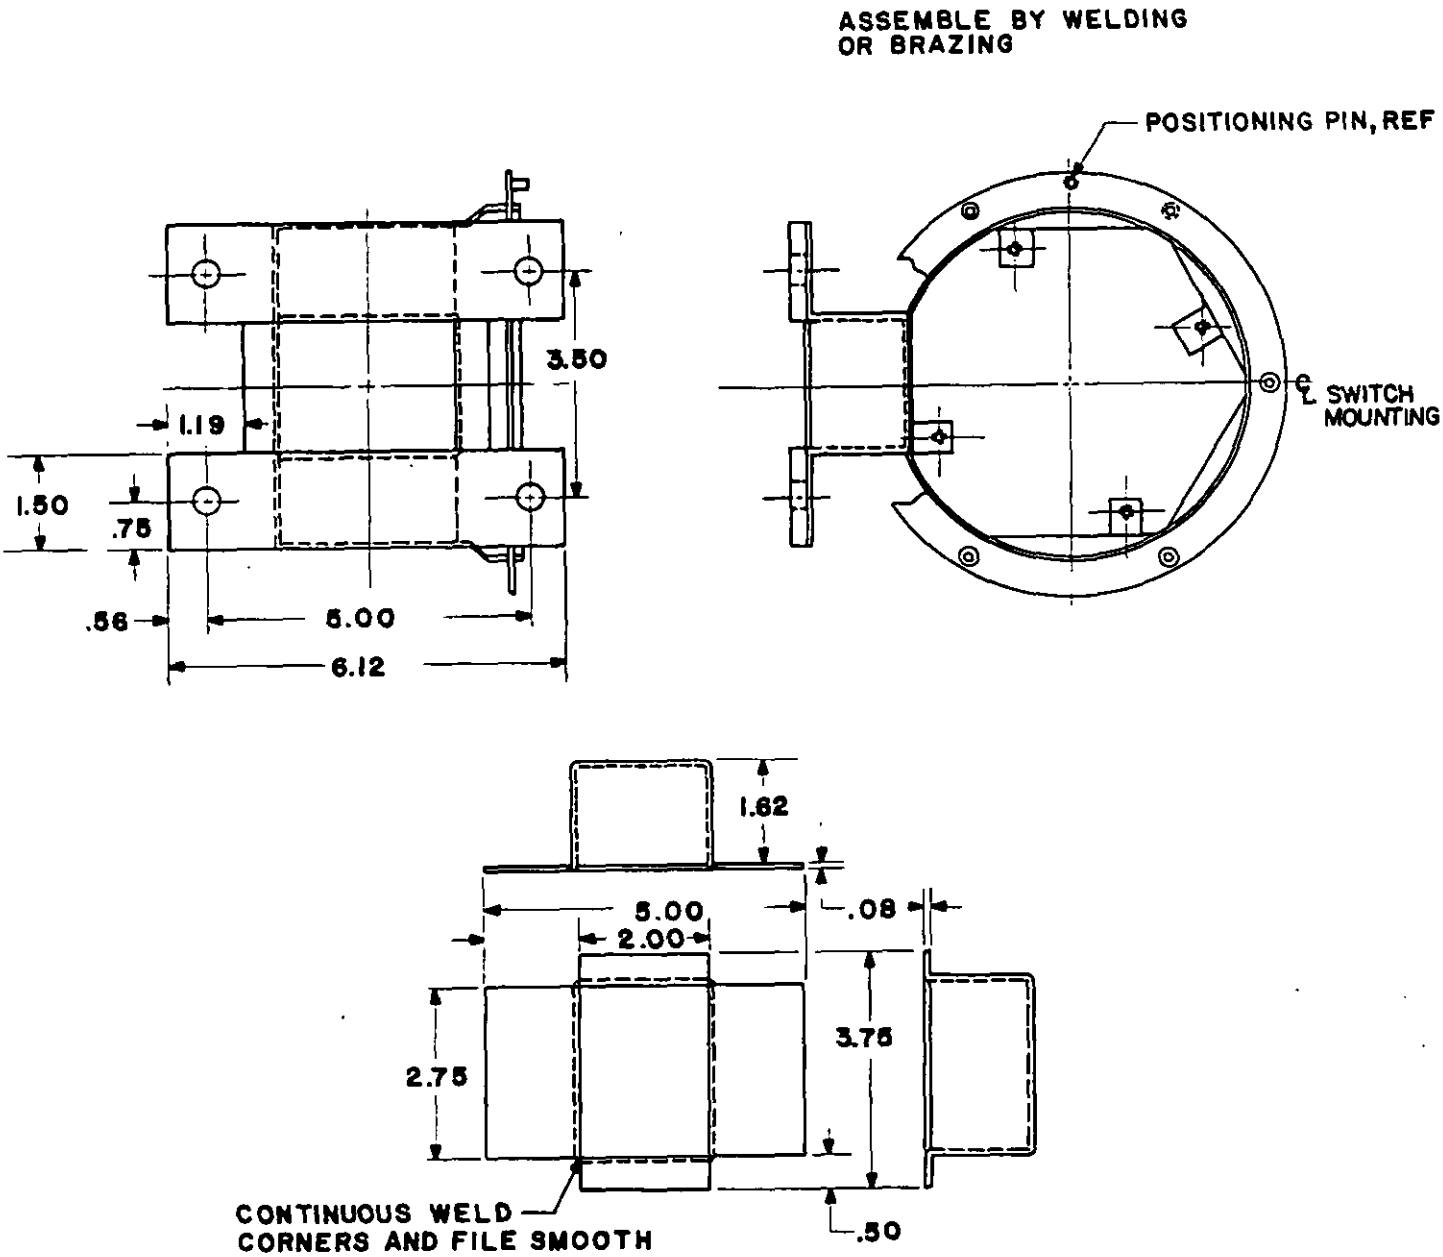

SH 131345

FIGURE 3. Box assembly, (symbol 2786). (04)


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:02Z
Check the source to verify that this is the current version before use.

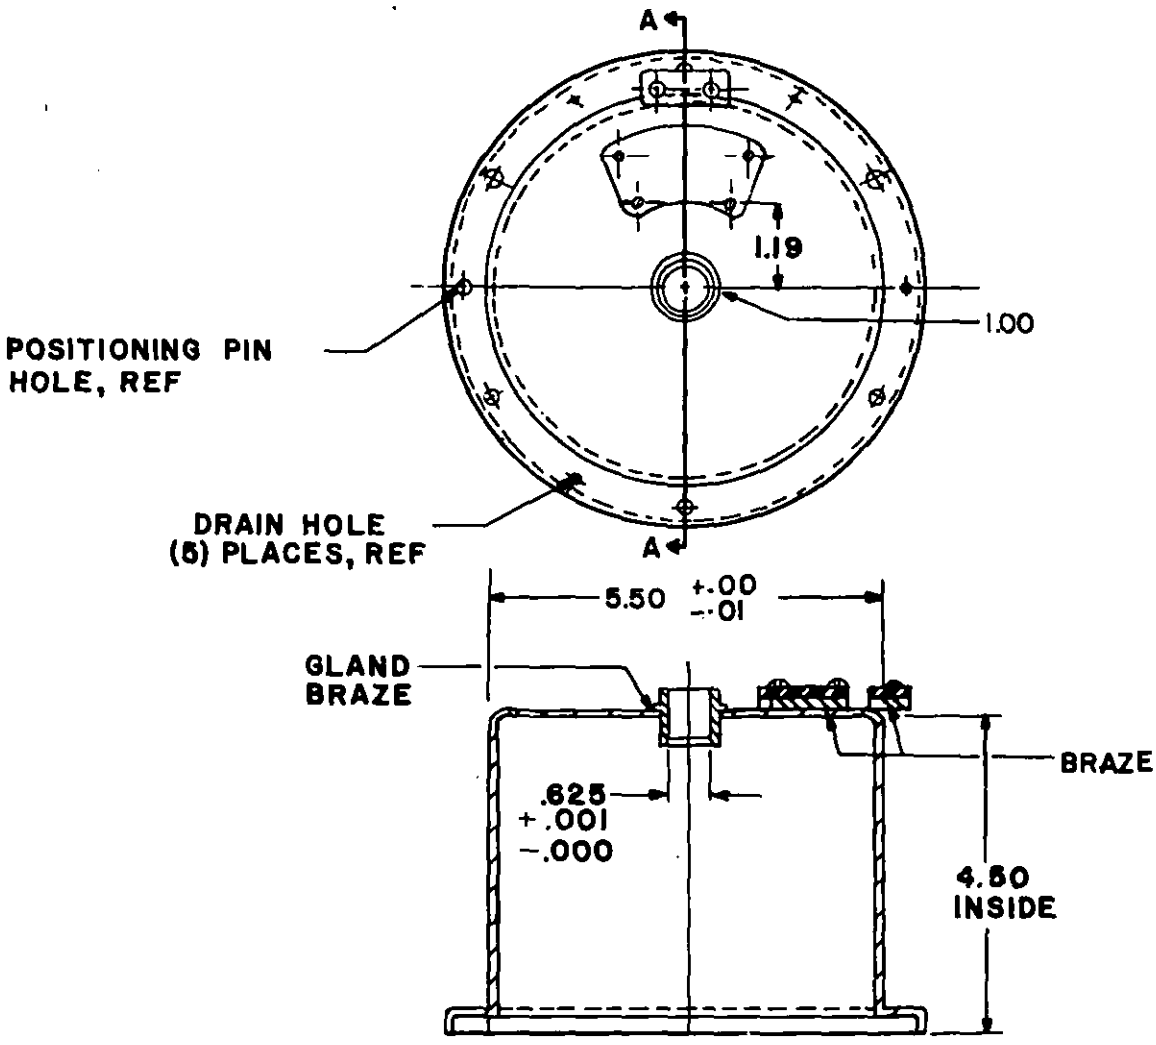

SH 131346


FIGURE 4. Cover assembly, (modified).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:02Z
Check the source to verify that this is the current version before use.

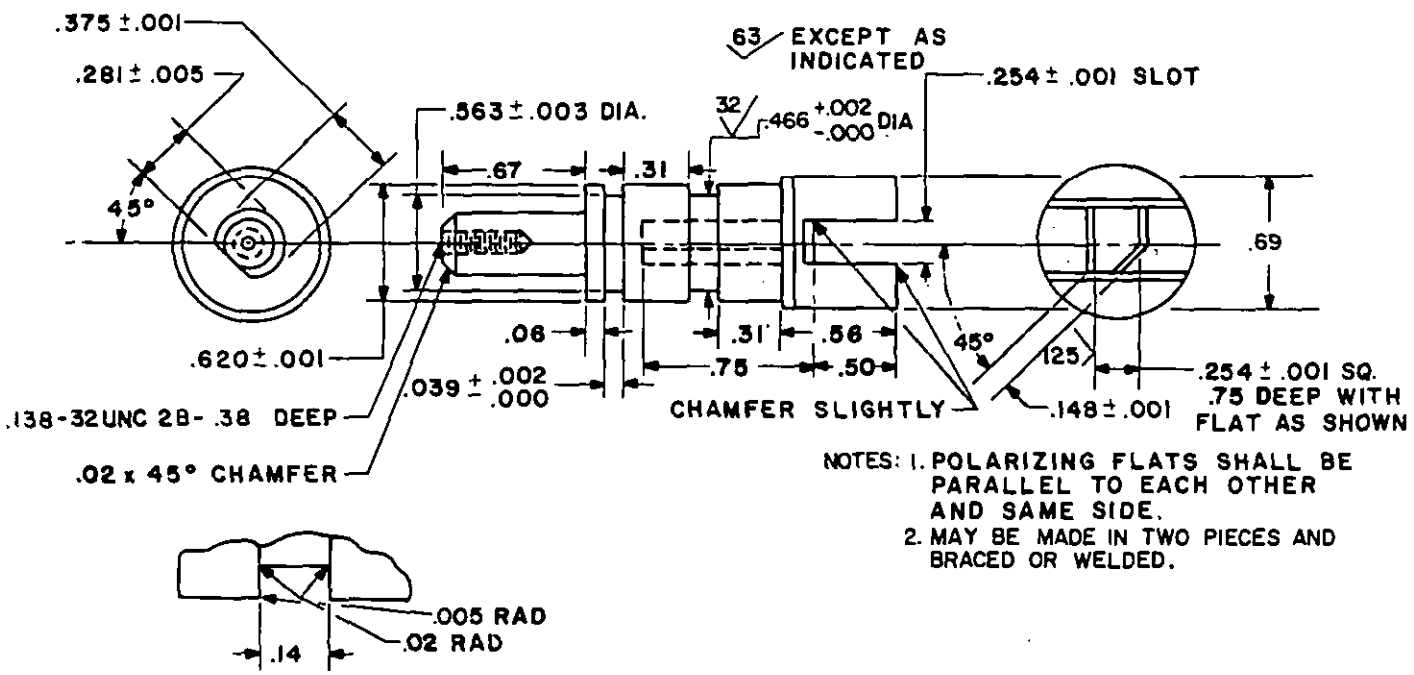

SH 131347


FIGURE 5. Coupling. (06)

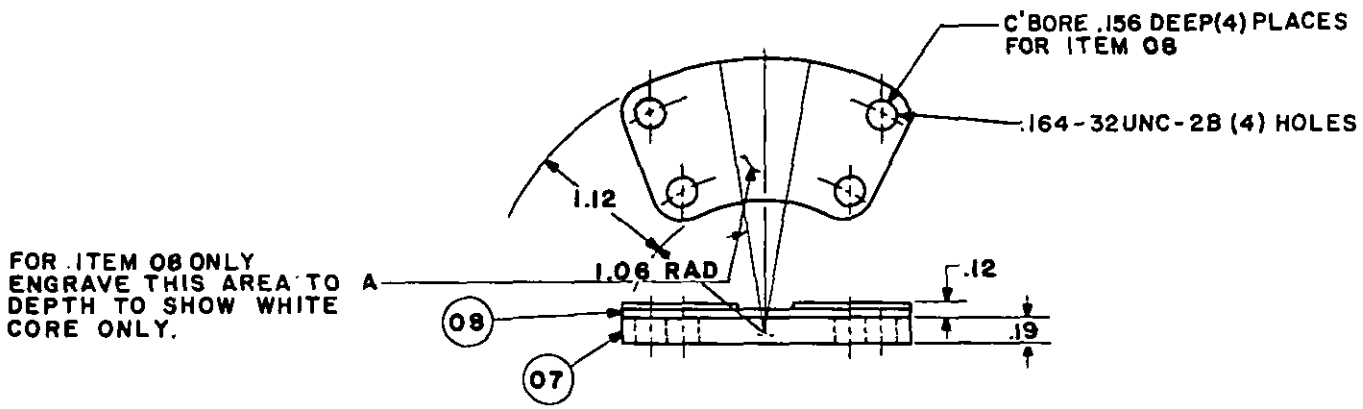

SH 131348


FIGURE 6. Foundation plate and indicator plate. (07) and (08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:02Z
Check the source to verify that this is the current version before use.

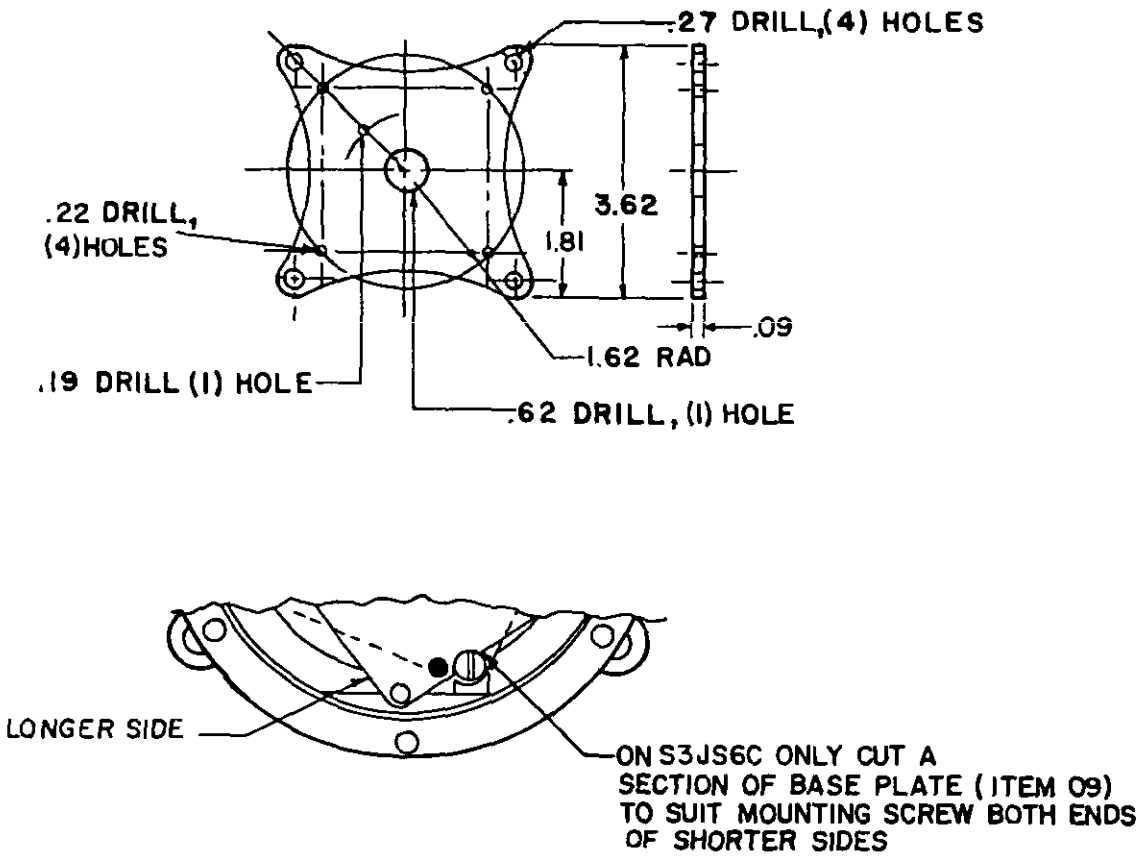


SH 131349

FIGURE 7. Switch plate. (09)

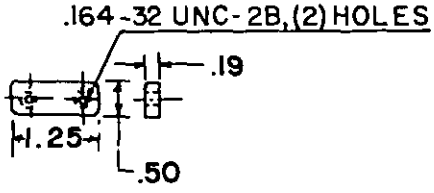

SH 131350


FIGURE 8. Foundation plate. (10)

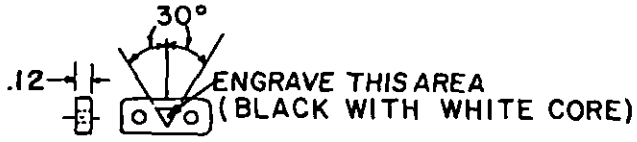

SH 131351

Figure 9. Plate. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:02Z
Check the source to verify that this is the current version before use.

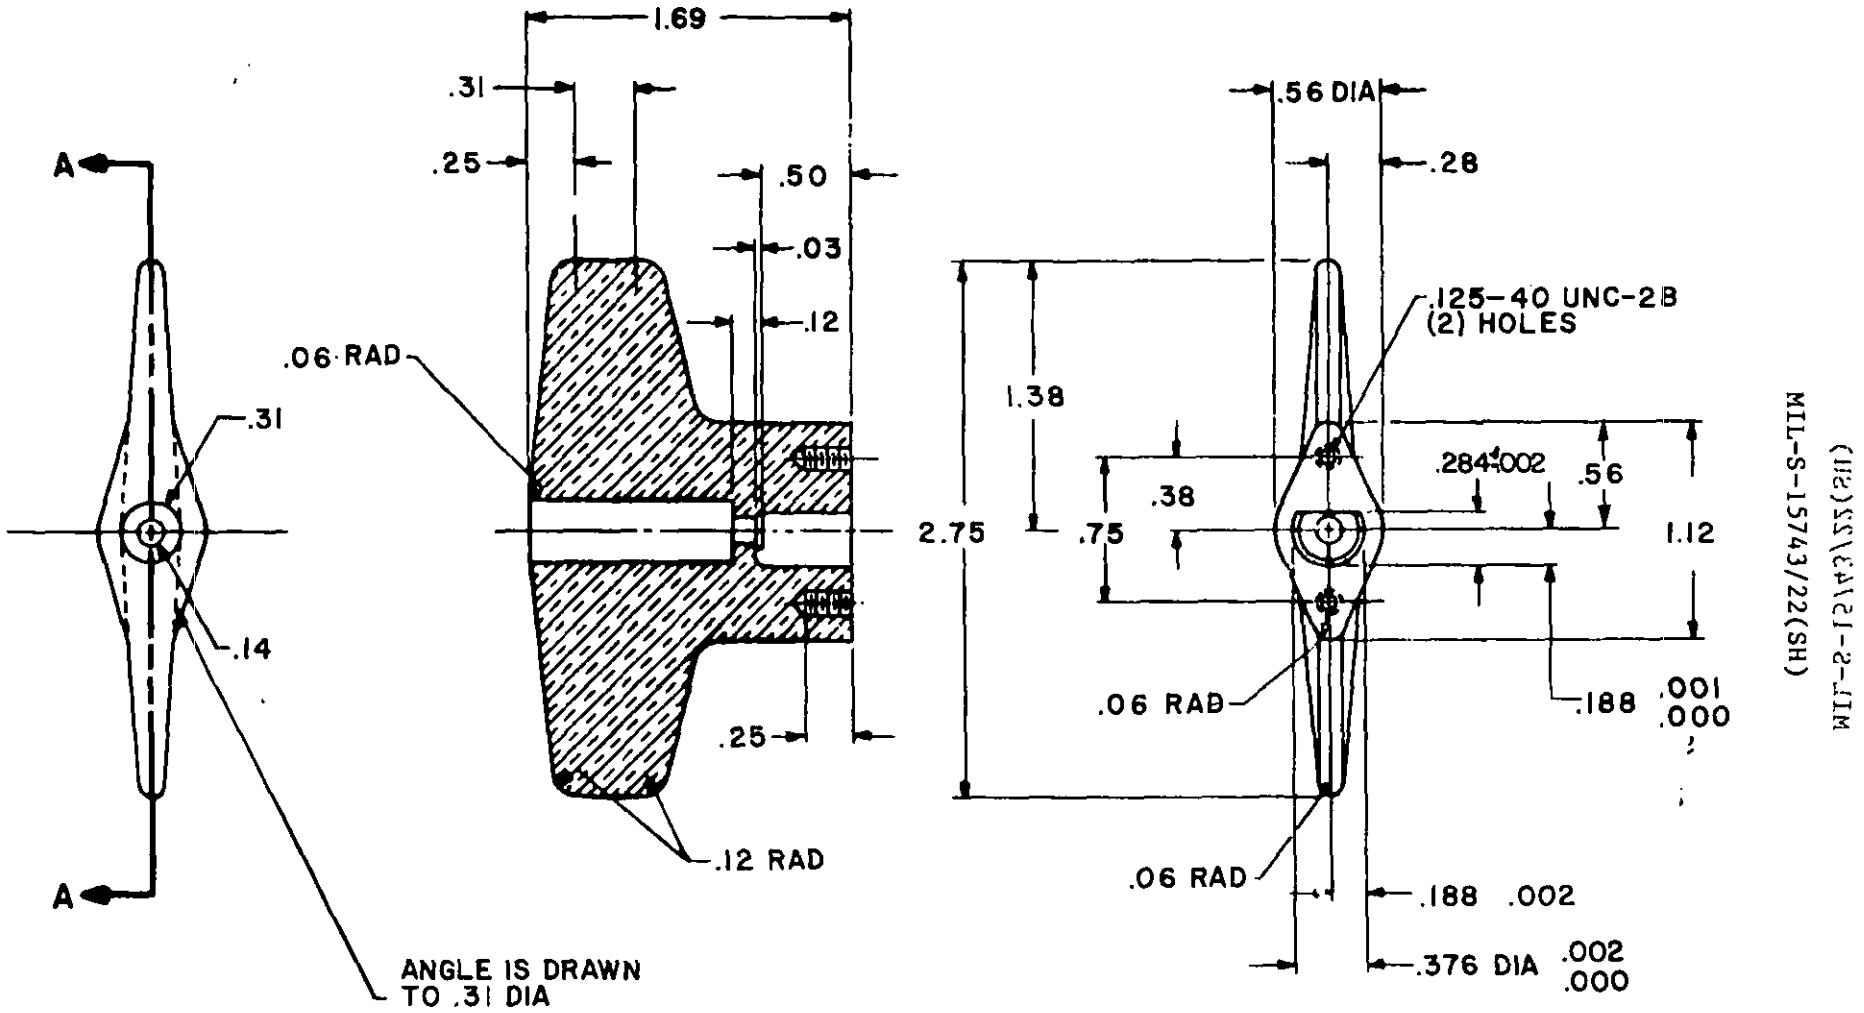


SH 131352

MIL-S-15743/22(SH)


FIGURE 10. Handle. (12)

(for type S3JK5(16) switches)

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:02Z
Check the source to verify that this is the current version before use.

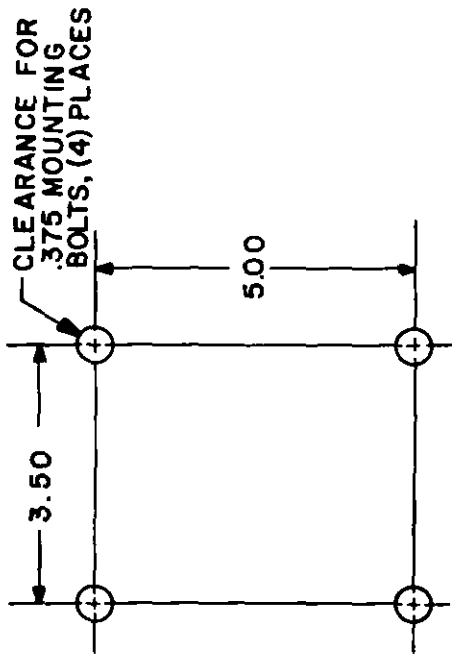

B. Symbol 2786
(bulkhead mounting)

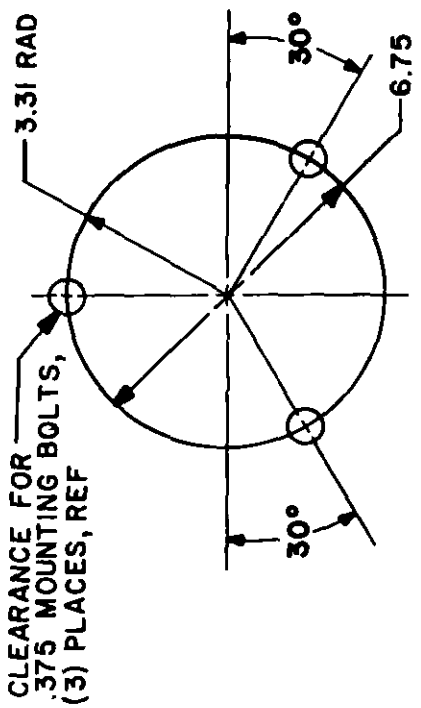


A. Symbol 2785
(deck mounting)

FIGURE 11. Mounting dimensions.

SH 131353

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:02Z
Check the source to verify that this is the current version before use.

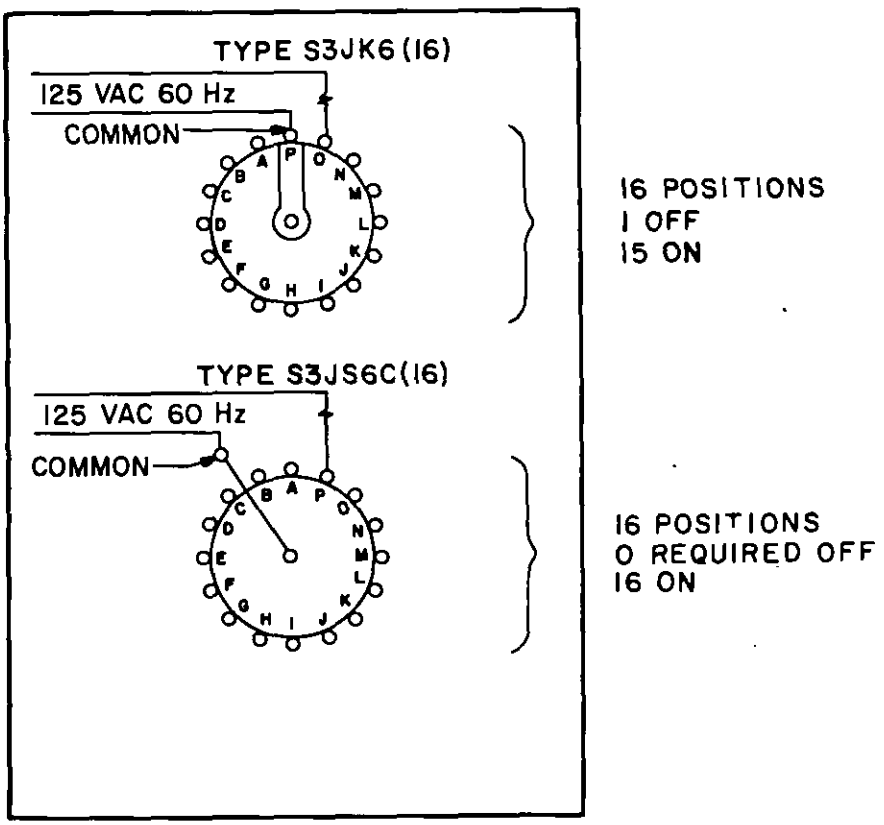


SH 131354

FIGURE 12. Wiring diagram. (13)

(showing one section only)

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:02Z
Check the source to verify that this is the current version before use.

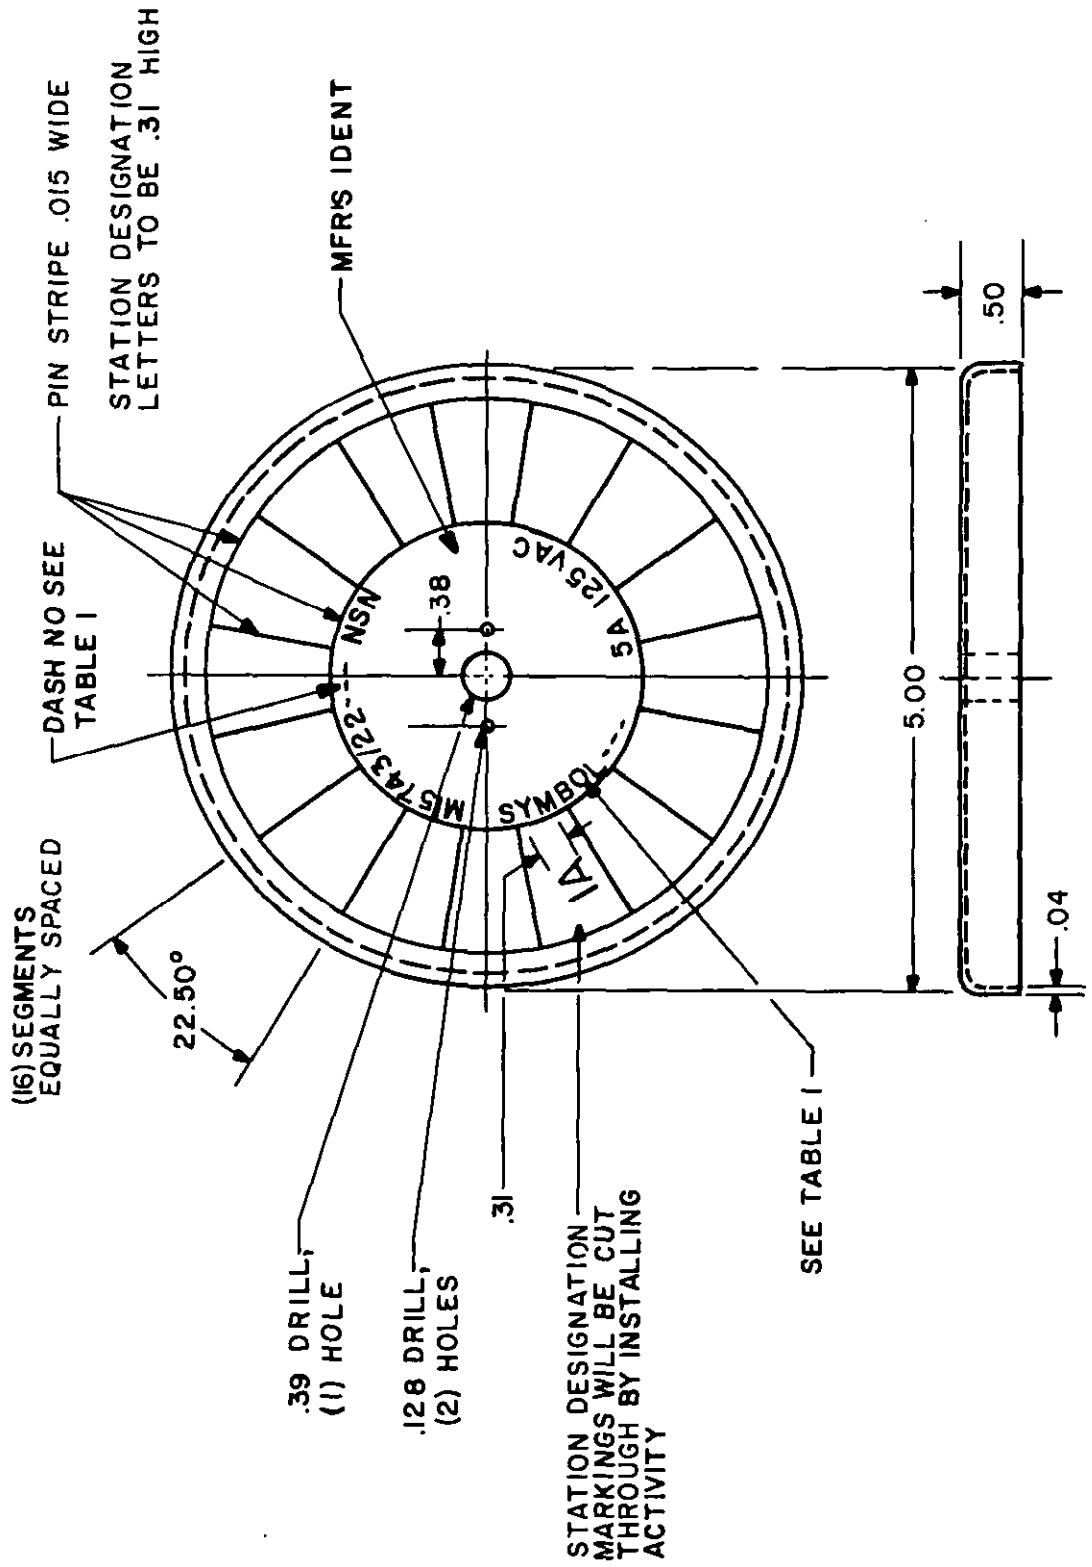

SH 131355

FIGURE 13. Identification plate. (16)

Source: https://assist.dla.mil - Downloaded: 202640-18T08:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

SYMBOL NUMBER: See table I.

DESIGN:

Electrical rating: 125 Va.c., 0-5 ampere, 60 Hz.
Dimensions and configuration: See figures 1 through 10 and 13.
Wiring diagram: See figure 12.
Mounting dimensions: See figure 11.
Degree of enclosure: Watertight.
Weight: (a) Symbol 2785 10 pounds maximum.
(b) Symbol 2786 12 pounds maximum.
Designation and marking: See figure 13.
Identification data shall be as shown on figure 13. Unless otherwise specified in the ordering data, switch action marking shall be left blank.
Parts: The parts shown in table II and as specified in MIL-S-15743 shall be used in the construction of the switches specified herein.

GENERAL INFORMATION:

Military part numbers and general information are as shown in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Types enclosure	Type 1/ switch	No. of poles and switching characteristics
M15743/22-001	2785	Deck mounted	S3JK6	6-section
M15743/22-002	2786	Bulkhead mounted	S3JS6C	16-position

1/ See ordering data. Supersedes NAVSEA Drawing 815-1853083.

ORDERING DATA:

Acquisition documents should specify the following:
(a) Switch action marking, if required, (see requirements).
(b) Type of switch required (see items 14 and 15).

TABLE II. Parts list.

Item no. 1/	Description	Quantity M15743/22-		Material/specification	Remarks
		001	002		
01	Switch, enclosed (sym 2785)	-		-----	See figure 1
02	Switch, enclosed (sym 2786)		-	-----	See figure 1
03	Enclosure (deck mounted)	1	-	Brass, MIL-E-24142/5	See figure 2 M24142/5-003 Mod 2/
04	Enclosure (bulkhead mounted)	-	1	Brass, MIL-E-24142/5	See figure 3 M24142/5-003 Mod 2/

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:02Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list. - Continued

Item no. 1/	Description	Quantity MI5743/22- 001	Quantity MI5743/22- 002	Material/specification	Remarks
05	O-ring	1	1	MS28775-111	----
06	Coupling	1	1	CRES, class 304 or 316 of QQ-S-766	See figure 5
07	Foundation plate	1	1	Brass, QQ-B-613	See figure 6
08	Indicator plate	1	1	Plastic, type NDP of L-P-387	Blk w/Wht core see figure 6
09	Switchbase plate	1	1	Plastic, type NDP of L-P-387	See figure 7
10	Foundation plate	1	1	Brass, QQ-B-613	See figure 8
11	Plate (for item 10)	1	1	Brass, QQ-B-613	See figure 9 Blkw/Wht core
12	Handle (for item 15 only) 3/	as reqd	as reqd	Copper alloy 854 of QQ-C-390	See figure 10
13	Wiring diagram	1	1	MIL-E-2036	See figure 12
14	Switch (type S3JS6C(16)) 4/ (with handle) 5/	as reqd	as reqd	NAVSEA Drawing 9000-S6202-73879	----
15	Switch (type S3JK6(16)) 4/	as reqd	as reqd	NAVSEA Drawing 815-1853013	----
16	Identification plate	1	1	Brass, QQ-B-613	See figure 13

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Switch enclosure cover modified for both symbols 2875 and 2786. Switch box assembly modified for symbol 2786.
3/ Handle shall be furnished with switch type S3JK6 (see 4/ below).
4/ Switch S3JS6C and S3JK6 are interchangeable. Type switch shall be specified (see ordering data).
5/ Pin and yoke must be removed from bottom of switch S3JS6C before assembly in enclosure. Switch shall be modified as shown on figure 7.

Preparing activity:
Navy - SH
(Project 5930-N584-22)

Source: https://assist.dla.mil Downloaded: 202610-18T08:02Z
Check the source to verify that this is the current version before use.