INCH-POUND

A-A-50026A
September 30, 1992
SUPERSEDING
A-A-50026
April 9, 1982

COMMERCIAL ITEM DESCRIPTION

DRYING AND CONDITIONING TUMBLERS, LAUNDRY

The General Services Administration has authorized the use of this Commercial Item Description in preference to Federal Specification Sheet OO-D-1297/1.

1. CLASSIFICATION

1.1 Classification. This commercial item description covers commercial laundry drying and conditioning tumblers, one door type, end loading style, in the following types, sizes, reversibility, and controls, as specified (see 5.2):

Type of heat:

E - Electric (sizes 15 through 110)
S - Steam (all sizes)
G - Gas (all sizes)

Sizes: (dry weight capacity, minimum)

15 pounds	100 pounds
20 pounds	110 pounds
25 pounds	120 pounds
30 pounds	150 pounds
50 pounds	170 pounds
60 pounds	200 pounds
75 pounds	

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-UXT, Natick, MA 01760-5017

AMSC N/A FSC 3510

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

Resersibility:

N - Non-reversing tumbler action (sizes 15, 20, 25, and 30 only)
R - Reversing tumbler action (sizes 50 through 200)

Controls:

C - Computer controlled (all sizes)
M - Manual controlled (all sizes)

1.2 CID based part identification number (PIN). A document based PIN to identify types, size numbers, reversibility, and controls is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The laundry tumbler shall be capable of holding and drying the specified poundage (see 1.1 and 5.2) of dry weight clothes with 100% moisture retention. The tumbler shall use either electric, steam, or gas heat as specified (see 1.1 and 5.2). All electric and steam tumblers shall be UL or CSA certified, and all gas tumblers shall be AGA or CGA certified (see 5.3.2). The tumbler shall consist of a loading door, cabinet, basket/drum, lint trap, controls, and operation/maintenance manual(s). All tumblers shall be wired for use in accordance with NFPA Standard No. 70. All electric power and gas control systems shall be designed in accordance with the applicable ANSI requirements. Electrical components shall conform to the applicable UL requirements. Tumbler components shall conform to the applicable AGA or FMEA requirements (see 5.3.2). The tumbler action shall be non-reversing for sizes 15, 20, 25, and 30 only. On tumbler sizes 50 through 200 the tumbler action shall be reversing or non-reversing, as specified (see 1.1 and 5.2). The minimum heat outputs shall be as specified in table I.

TABLE I. Heat outputs

Size (minimum dry weight) pounds	Heat output (minimum)		
	Electric (kilowatt rating)	Steam 1/ (Boiler horsepower)	Gas (BTU/hour)
15	15	1.6	50,000
20	18	2.0	55,000
25	19	2.3	70,000
30	20	3.0	90,000
50	30	3.6	115,000
60	30	4.0	130,000
75	30	4.4	165,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

TABLE I. Heat outputs

Size (minimum dry weight) pounds	Heat output (minimum)		
	Electric (kilowatt rating)	Steam 1/ (Boiler horsepower)	Gas (BTU/hour)
100	42	8.0	225,000
110	48	9.5	250,000
120	not avail.	11.0	275,000
150	not avail.	12.5	380,000
170	not avail.	17.0	490,000
200	not avail.	20.0	675,000

1/ Steam pressure at 125 psig.

2.1.1 Loading door. The loading door shall be made of plastic in accordance with type XXI of ASTM D 4617 or steel and provided with a latch and door handle. The loading door shall be right-handed unless otherwise specified (see 5.2).

2.1.2 Cabinet. The cabinet shall be made of steel with a minimum thickness of 0.044 inch. The cabinet shall have a 100% baked enamel finish on both the inside and the outside. The color on the outside of the cabinet shall be white, unless otherwise specified (see 5.2). The cabinet shall have leveling legs that can extend a minimum of 1 inch.

2.1.3 Basket/drum. The basket/drum shall be made of galvanized steel unless otherwise specified (see 5.2). The basket/drum (cylinder) diameter and volume shall be as specified in table II.

TABLE II. Cylinder diameter/volume

Size	Cylinder diameter (inches) (minimum)	Cylinder volume (cu.ft.) (minimum)
15	27	5.9
20	27	7.9
25	27	9.2
30	27	9.6
50	32	15.8
60	34	19.7
75	36	22.4
100	44	34.0
110	44	36.0
120	44	38.2
150	50	49.7
170	51	51.2
200	62	65.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

2.1.4 Lint trap. The lint trap shall be located under the basket/drum and be accessible from the front. The lint trap shall contain a fine mesh, self-cleaning, screen that allows lint to fall off the screen and into the lint storage area.

2.1.5 Controls. The controls shall be computer controlled or manually controlled as specified (see 1.1 and 5.2). The controls shall be located above the basket/drum and be accessible from the front. The tumbler shall not operate when the loading door is open.

2.1.5.1 Computer controls. The computer control shall automatically or manually control drying and cooling temperatures. Automatic settings shall select drying and cooling temperatures by preprogrammed formulas. The automatic setting shall control drying temperatures, stop the drying cycle when clothes become dry, and control the cooling temperature and time.

2.1.5.2 Manual controls. The manual controls shall include an "On/Off" switch with indicator light, a drying time dial, a cooling time dial, and a drying temperature selector. The drying time dial shall be able to set the drying time from 0 to 60 minutes. The cooling time dial shall be able to set the cooling time from 0 to 15 minutes. The drying selector shall have high, medium, and low temperature selections or a temperature dial from 135° to 170° Fahrenheit.

2.1.6 Manual(s). Each laundry tumbler shall be suppled with a complete set of manuals or a complete manual. The manual(s) shall contain installation instruction, complete operational instructions for all machine operations, complete maintenance instructions and schedules, a trouble shooting guide for the unit, a wiring diagram of the unit, and figures and parts lists for the unit. The parts lists shall have part numbers for the ordering of spare/replacement parts.

2.2 Electrical requirements. The 15 through 30 pound capacity, steam or gas, tumblers shall be designed to operate on 120 volts, 60 hertz, 1 phase power, or as specified (see 5.2). All other types and sizes shall be designed to operate on 208/240 volts, 60 hertz, 3 phase power, or as specified (see 5.2).

2.3 Data name plate (Government unique requirement, see 5.4). The laundry tumblers shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying; (b) Identification tags; (c) Information not required and (d) Optional marking information shall not apply. The data name plate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the laundry tumbler by rivets, screws, or welding in such a manner that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the laundry tumbler. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

National Stock Number
Procurement Contract Number
Specification Data
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List only if different from Manufacturer)
Manufacturer's Model Number
Government Approved Manual Number (when specified, see 5.2).

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

3.3 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

4. PACKAGING

4.1 Packaging, packing, and marking. The drying and conditioning tumblers shall be packaged, packed, and marked in accordance with the domestic or overseas requirements of ASTM D 3951, as applicable (see 5.2).

5. NOTES

5.1 Intended Use. The laundry tumblers are intended for use in fixed installations.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type of heat, size, reversibility, and controls required for tumbler (see 1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

c. When a left-handed loading door is required (see 2.1.1).
d. Color when other than specified (see 2.1.2).
e. Material for basket/drum when other than specified (see 2.1.3).
f. When electrical requirements are other than specified (see 2.2).
g. The Government approved manual number is to be included on the the data name plate when manuals are purchased under the contract (see 2.3).
h. Type of packaging and packaging requirements required (see 4.1).

5.3 Sources of documents.

5.3.1 Sources of Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.3.2 Sources for non-Government association documents.

NFPA Standard NO. 70 - National Electrical Code, is available from:

National Fire Protection Association (NFPA)
1 Batterymarch Park
Quincy, MA 02269

ANSI Standards are available from:

American National Standards Institute (ANSI)
11 West 42nd Street
New York, NY 10036

UL Standards are available from:

Underwriters Laboratories (UL)
333 Pfingsetn Road
Northbrook, IL 60062

AGA Standards are available from:

American Gas Association (AGA)
8501 East Pleasant Valley Road
Cleveland, OH 44131

CGA certification is available from:

Canadian Gas Association (CGA)
55 Scarsdale Road
Don Mills, Ontario M3B2R3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

CSA certification is available from:

Canadian Standards Association (CSA)
178 Recdale Boulevard
Recdale, Ontario M9W1R3

FMEA requirements are available from:

Factory Mutual Engineering Association (FMEA)
1151 Boston-Providence Turnpike
Norwood, MA 02062

ASTM D 3951 - Standard Practice for Commercial Packaging


ASTM D 4617 - Phenolic Compounds, (PF)

Both are available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

5.4 Government unique requirements. Whenever "(Government unique requirements)" is included in the title of a paragraph under "salient characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

5.5 Part or identifying number (PIN). The PINs to be used for items acquired by this CID are as follows:

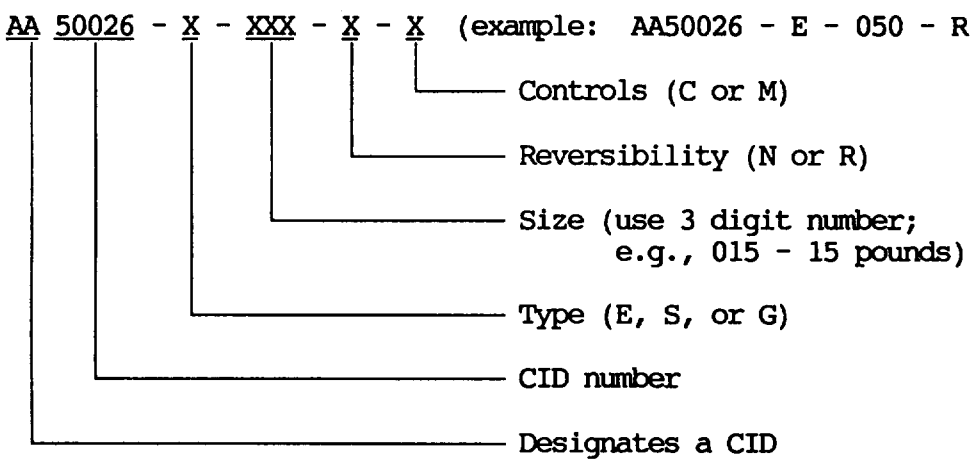

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - GL
Air Force - 99

Review activities

Air Force - 82
DLA - GS

User activity

Army - ME

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 3510-0323

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.