A-A-51027
14 October 1985

COMMERCIAL ITEM DESCRIPTION

BRUSH, FIBER, ROTARY WHEEL (Dental)

The General Services Administration has authorized this commercial item description in preference to Interim Federal Specification GG-B-00750d.

This commercial item description covers rotary wheel fiber brushes used with a dental lathe suitable for cleaning and polishing prosthetic appliances.

The brushes shall be furnished in the following size numbers, as specified:

12, 20, 23, 25, 26

Salient characteristics:

Style and design of brushes shall be as shown in figure 1. Brushes shall have a center block fabricated of a suitably seasoned hardwood. The spindle holes of the center block shall be centered and shall be either tapered or straight so as to fit standard lathe spindle chucks. The fibers of the brushes shall be securely staple-set or wire-drawn with brass or other rust resistant brush wire and shall completely fill each hole. The holes for mounting the fibers shall be evenly spaced around the periphery of the center block. The brushes shall conform to the construction requirements in Table I for applicable size number.

TABLE I. Construction Requirements.

Size number of brush	12	20	23	25	26
Center block.					
Minimum number of holes for fiber	40	54	75	75	75
Number of rows of holes	2	2	3	3	3
Drill size for hole*	40-43	34-35	33-35	33-35	35
Fiber:					
Minimum length of fiber held in block, inch	1/8	1/8	1/8	1/8	3/16
Minimum length outside of block, inch	1/2	9/16	11/16	11/16	3/4
Converging (C) or Straight (S)	C	C	C**	S	S

*The drill sizes shall be as specified in the United States of America Standards Institute publication USA B94.11(M)-1979.
**Only the outer rows of fiber shall converge.

FSC 6520

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

The diameter of the spindle hole for untapered holes shall be 1/4 + 1/64 inch. The diameter of the spindle hole or tapered holes shall be 1/4 ± 1/64 at the small end of taper and 9/32 + 1/64 -0 inch at the tapered end. The 9/32 inch diameter is obtained using a 14.5 degree countersink. Center block and spindle hole shall have a smooth finish. The brushes shall conform to the dimensional requirements in Table II for applicable size number.

TABLE II. Dimensional Requirements.

Size number of brush		Overall Diameter	Diameter of Center Block	Thickness of Center Block
Converging	Straight	Inches (Tolerance ± 1/16)		
12	--	1-7/8	7/8	9/16
20	--	2-1/2	1-1/4	5/8
23	--	2-3/4	1-1/4	7/8
--	25	2-3/4	1-1/4	7/8
--	26	2-3/4	1-1/4	7/8

Brush fiber for sizes 12, 20, 23, and 25 shall be stiff hog bristle or horsetail hair, undyed, natural black. Brush fiber for size 26 shall be soft goat hair, white in color.


Workmanship. The rotary wheel fiber brushes shall be free from defects which detract from their appearance or impair their serviceability.

Unit. Each (EA). Each brush, as specified, constitutes one unit.


Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

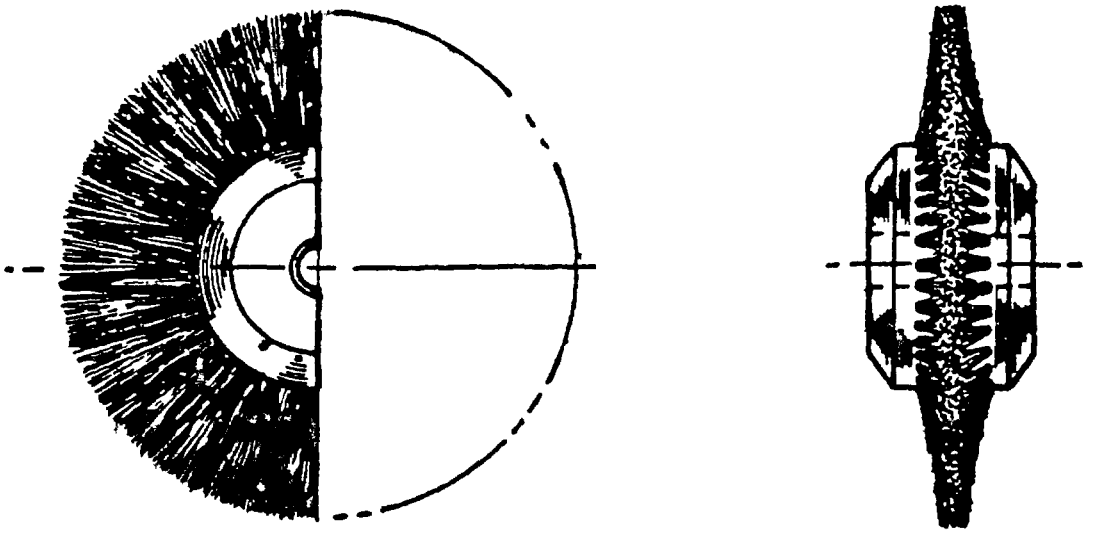

TYPE I CONVERGING

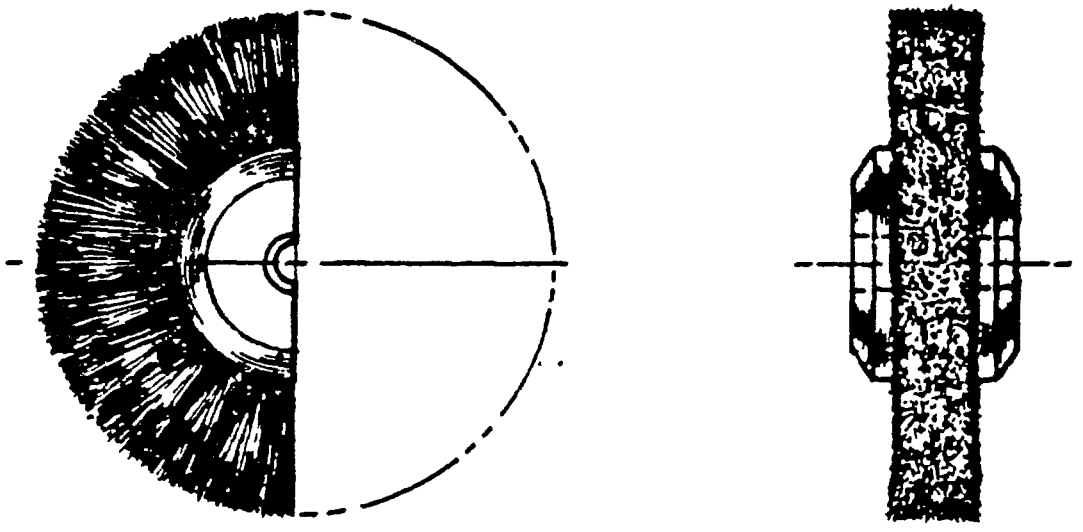

TYPE II STRAIGHT

NOTE: SPINDLE HOLES SHALL BE EITHER TAPERED OR STRAIGHT

FIGURE 1. TYPES OF BRUSHES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item. Inspection shall be conducted to determine compliance with specification requirements.

Tests. There shall be no evidence of loosening of the staple-set or wire-drawn fiber, and there shall be no evidence of foreign material present in the brush, when the rotary wheel fiber brush is placed in a dental lathe and rotated at a speed of 3600 revolutions per minute (r.p.m.), and a coarse, hard straight steel file, which completely covers the width of the area occupied by the fibers, is gradually pushed into the brush at a horizontal angle until the fibers are bent over at right angles tangent to the circumference of the center block.

Sampling for inspection. Sampling for inspection shall be conducted in accordance with MIL-STD-105. The unit of product for inspection purposes shall be one rotary wheel brush. Unless otherwise specified, sampling for examination shall be conducted at inspection level II, AQL 2.5, and sampling for tests (when applicable) shall be conducted at inspection level S-1, AQL 1.0.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U. S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

NOTE: The following National Stock Numbers are covered by this document:

Stock Number	Item Identification
6520-00-567-7000	BRUSH, FIBER, ROTARY WHEEL, Converging Type, Stiff, 2 Rows, 1-7/8 inch
6520-00-567-7250	BRUSH, FIBER, ROTARY WHEEL, Converging Type, Stiff, 2 Rows, 2-1/2 inch
6520-00-567-7450	BRUSH, FIBER, ROTARY WHEEL, Converging Type, Stiff, 3 Rows, 2-3/4 inch
6520-00-567-9650	BRUSH, FIBER, ROTARY WHEEL, Straight, Soft, 3 Rows, 2-3/4 inch
6520-00-568-0150	BRUSH, FIBER, ROTARY WHEEL, Straight, Stiff, 3 Rows, 2-3/4 inch

Ordering data. Rotary wheel brushes shall be furnished in the applicable size, as specified. Intermediate/exterior package quantities, labeling, and marking must be as specified in the contract and/or order.

MILITARY INTERESTS:

Custodians.

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD-MB

Agent:
DLA-DM

Project No. 6520-1818

Location S2-9-2

☆U S GOVERNMENT PRINTING OFFICE 1985 — 605 036/24883

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.