NOT MEASUREMENT SENSITIVE


MIL-D-3943/13D
12 June 1992
SUPERSEDING
MIL-D-3943/13C
31 March 1987

MILITARY SPECIFICATION SHEET


DECORATION, LEGION OF MERIT, OFFICER AND LEGIONNAIRE


This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

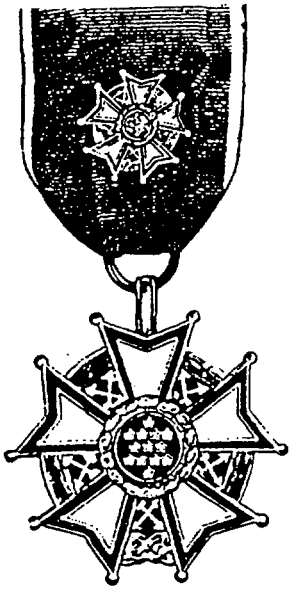

OBVERSE

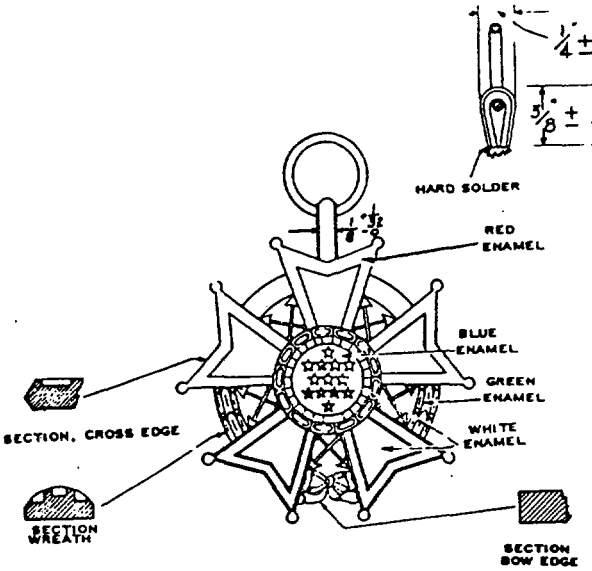

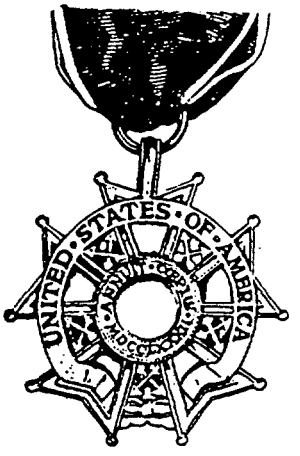

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Matte Finish with the Reverse Highlights Polished

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:

-1: 1-7/8 inches (4.76 cm) (REF)
-2: 15/16 inch (2.38 cm) (REF)

HEIGHT (Including Lug):

-1: 2 inches (5.08 cm) (REF)
-2: 1 inch (2.54 cm) (REF)

THICKNESS (Overall):

-1: 0.215 inch ± 0.020 inch (0.546 cm ± 0.051 cm)
-2: 0.140 inch ± 0.010 inch (0.356 cm ± 0.025 cm)

NOTES:

1. No piercing required.

2. The enamel colors shall be as indicated. The color shall conform to TIOH Color Chip Numbers listed below or the standard sample. The white enameled areas in the five (5) rays on the obverse side of the pendant shall be convex within the dikes.

COLOR	CHIP NO.
Red	4
Green	11
Blue	20
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

4. The center portion of the reverse of the pendant shall be smooth, flat, and suitable for engraving.

5. The ribbon attachment shall conform to the attachment specified on military specification sheet MIL-R-41819/2. The device shall be centered on the pendant ribbon.

6. The finished pendant ribbon length for Dash No. 1 shall be 1-7/8 inches ± 1/8 inch (4.76 cm ± 0.32 cm).

7. The design of the Officer and Legionnaire are identical except the Officer shall have the pendant ribbon device attached to the pendant ribbon as shown.

8. On an optional basis, the lug may be fabricated with one end an integral part of the pendant. Care should be taken that no sharp edges result from the bending and closure operation.

9. Type I Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Style 6, Type VIII with a Class 1 or 1A pad.

10. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/80.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

11. The lapel button shall conform to MIL-L-11484/10.

12. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

User activity:
Air Force - 45
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455-0669)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.