NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/13F
1 May 1997
SUPERSEDING
MIL-D-3943/13E
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, LEGION OF MERIT, OFFICER AND LEGIONNAIRE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

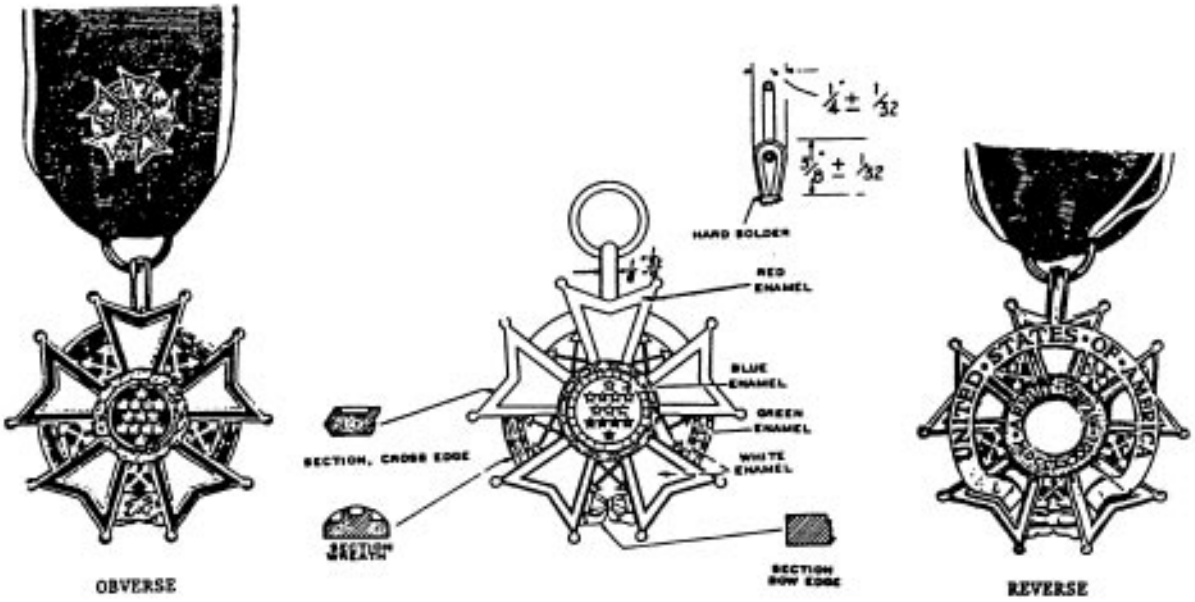

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH:
OBVERSE: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
REVERSE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
  DIAMETER:
      -1: 1-7/8 inches (4.76 cm) (REF)
      -2: 15/16 inch   (2.38 cm) (REF)

    HEIGHT (Including Lug):
      -1: 2 inches (5.08 cm) (REF)
      -2: 1 inch   (2.54 cm) (REF)

  THICKNESS (Overall):
      -1: 0.215 inch ± 0.010 inch (0.546 cm ± 0.025 cm)
      -2: 0.140 inch ± 0.010 inch (0.356 cm ± 0.025 cm)

NOTES:
    1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

    2. No piercing required.

    3. Enamel colors shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample. The white enameled areas in the five (5) rays on the obverse side of the pendant shall be convex within the dikes.

COLOR	CHIP NO.
Red	4
Green	11
Blue	20
White	28

    4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

    5. The center portion of the reverse of the pendant shall be smooth, flat, and suitable for engraving.

    6. The finished pendant ribbon length for Dash No. 1 shall be 1-7/8 inches ± 1/8 inch (4.76 cm ± 0.32 cm).

    7. The design of the Officer and Legionnaire are identical except the Officer shall have the 3/4 inch (1.91 cm) diameter pendant ribbon device conforming to MIL-DTL-41819/2 centered on the pendant ribbon as shown.

    8. The service ribbon for the Legion of Merit, Officer shall have the 3/8 inch (0.95 cm) diameter pendant ribbon device conforming to MIL-DTL-41819/2 centered on the service ribbon.

    9. On an optional basis, the lug may be fabricated with one end an integral part of the pendant. Care should be taken that no sharp edges result from the bending and closure operation.

   10. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

   11. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/80.

   12. The lapel button shall conform to MIL-DTL-11484/10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.