INCH-POUND


MIL-DTL-3943/13J
15 February 2009
SUPERSEDING
MIL-DTL-3943/13H
29 May 2007

DETAIL SPECIFICATION SHEET

DECORATION, LEGION OF MERIT, OFFICER AND LEGIONNAIRE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

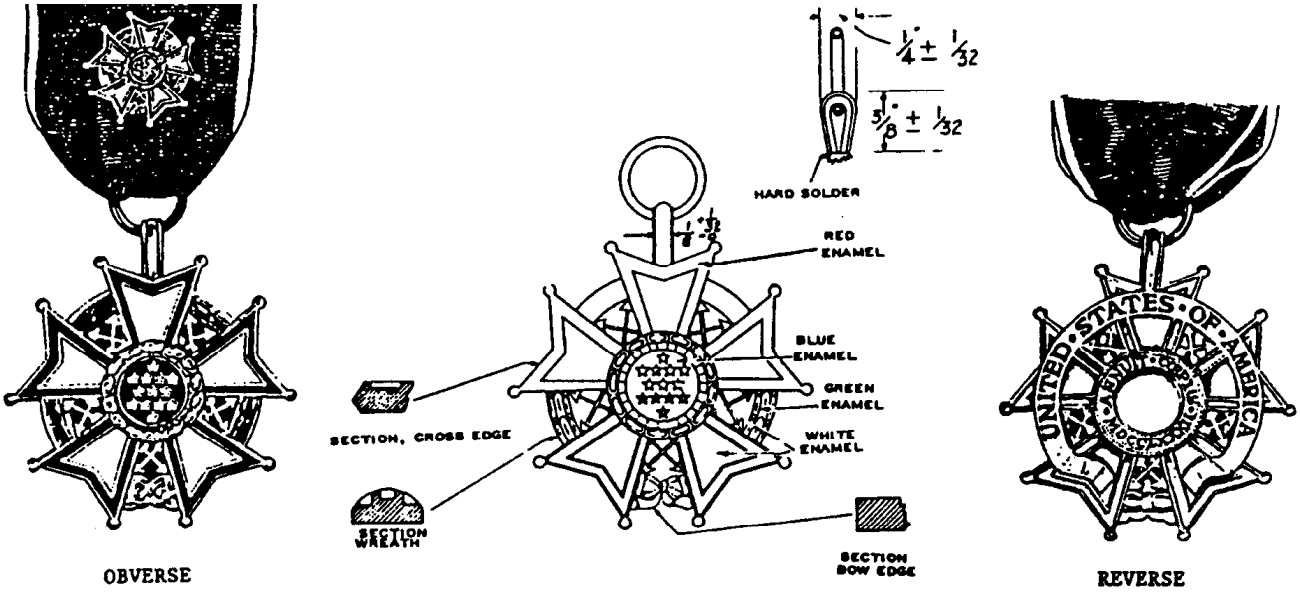

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH:

OBVERSE: Hard Enameled, Gold Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.

REVERSE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:
-1: 1-7/8 inches (REF)
-2: 15/16 inch (REF)
HEIGHT (including lug):
-1: 2 inches (REF)
-2: 1 inch (REF)
THICKNESS (overall):
-1: 0.215 inch ± 0.010 inch
-2: 0.140 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. No piercing required.

3. Enamel colors shall be as indicated. The colors shall conform to the TIOH Hard Enamel Color Chip Numbers listed below. The white enameled areas in the five (5) rays on the obverse side of the pendant shall be convex within the dikes.

COLOR	CHIP NO.
Red	4
Green	11
Blue	20
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

5. The center portion of the reverse of the pendant shall be smooth, flat, and suitable for engraving.

6. The finished pendant ribbon length for Dash No. 1 shall be 1-7/8 inches ± 1/8 inch.

7. The design of the Officer and Legionnaire are identical except the Officer shall have the 3/4 inch diameter pendant ribbon device conforming to MIL-DTL-41819/2 centered on the pendant ribbon as shown.

8. The service ribbon for the Legion of Merit, Officer shall have the 3/8 inch diameter pendant ribbon device conforming to MIL-DTL-41819/2 centered on the service ribbon.

9. On an optional basis, the lug may be fabricated with one end an integral part of the pendant. Care should be taken that no sharp edges result from the bending and closure operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

10. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

11. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/80.

12. The lapel button shall conform to MIL-DTL-11484/10.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force – 11
Navy - NU

Preparing activity:
Army - IH
(Project No. 8455-2009-043)

Review activities:
Air Force - 99
Navy - MC
Coast Guard - CG
DLA – CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.