NOT MEASUREMENT SENSITIVE


MIL-D-3943/14C
12 June 1992
SUPERSEDING
MIL-D-3943/14B
31 March 1987

MILITARY SPECIFICATION SHEET

DECORATION, LEGION OF MERIT, COMMANDER

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

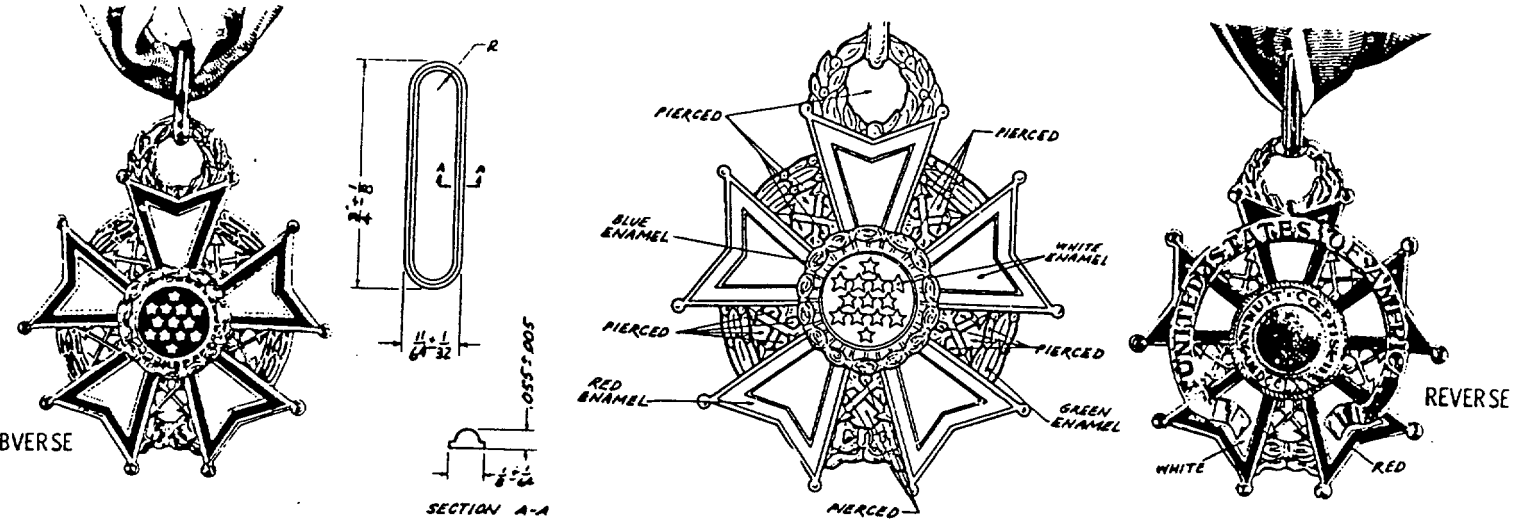

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Matte Finish with the Reverse Highlights Polished

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT: 2-17/32 inches (6.43 cm) (REF)
WIDTH: 2-3/16 inches (5.56 cm) (REF)
THICKNESS (At Thickest Point): 0.245 inch ± 0.005 inch (6.223 cm ± 0.012 cm)

NOTES:

1. Piercing shall be as indicated.

2. The enamel colors shall be as indicated. The color shall conform to TIOH Color Chip Numbers listed below or the standard sample. The white enameled areas in the five (5) rays on the obverse side of the pendant shall be convex within the dikes.

COLOR	CHIP NO.
Red	4
Green	11
Blue	20
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

4. The pendant ring shall be formed from red brass and shall be soldered to the pendant as shown.

5. The center portion of the reverse of the pendant shall be smooth, flat, and suitable for engraving.

6. The neck ribbon shall be in accordance with Figure 4.

7. Type I Decoration set shall consist of a neck ribbon with pendant, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VII with a Class 1 or 1A pad.

8. The ribbon for the neck ribbon and service ribbon shall conform to MIL-R-11589/80.

9. The lapel button shall conform to MIL-L-11484/10.

10. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Navy - NU
Air Force - 11
Review activities:
Air Force - 82,99
Navy - MC
DLA - CT
User activity:
Air Force - 45
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455-0669)

Source: https://assist.dla.mil - Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.