NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/14F
11 May 1999
SUPERSEDING
MIL-DTL-3943/14E
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, LEGION OF MERIT, COMMANDER

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

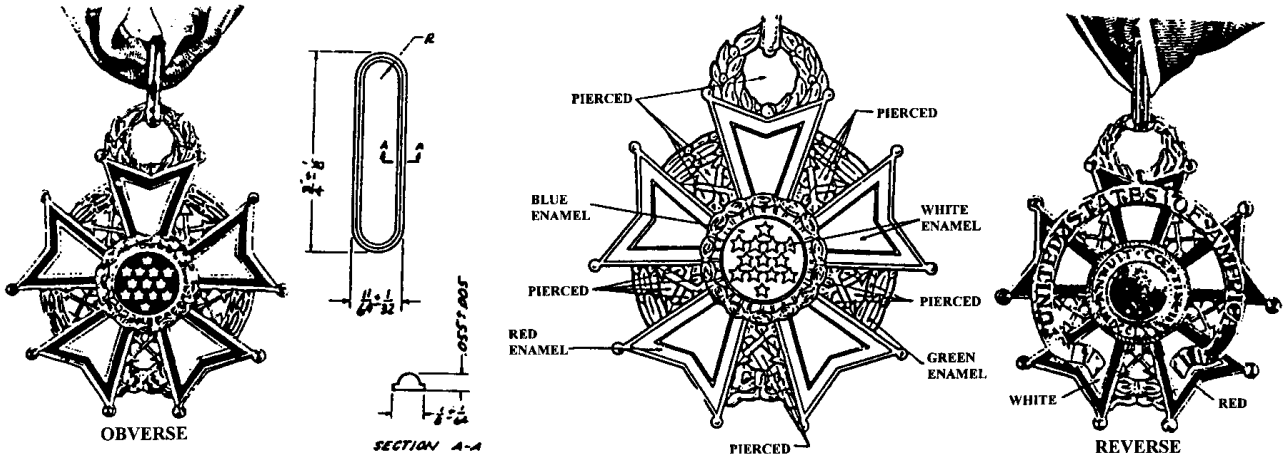

MATERIAL: Gilding Metal

FINISH:

OBVERSE: Hard Enameled, Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
REVERSE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT: 2-17/32 inches (REF)
WIDTH: 2-3/16 inches (REF)
THICKNESS (at thickest point): 0.245 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. Enamel colors shall be as indicated. The colors shall conform to the TIOH Hard Enamel Color Chip Numbers listed below. The white enameled areas in the five (5) rays on the obverse side of the pendant shall be convex within the dikes.

COLOR	CHIP NO.
Red	4
Green	11
Blue	20
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

5. The pendant ring shall be formed from red brass and shall be soldered to the pendant as shown.

6. The center portion of the reverse of the pendant shall be smooth, flat, and suitable for engraving.

7. The neck ribbon shall be in accordance with Figure 9.

8. Decoration set shall consist of a neck ribbon with pendant, a service ribbon with ribbon attachment, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VII, Style 5 with a Class 1 or 1A pad.

9. The ribbon for the neck ribbon and service ribbon shall conform to MIL-DTL-11589/80.

10. The lapel button shall conform to MIL-DTL-11484/10.

11. The ribbon attachment shall conform to MIL-DTL-41819/1.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians: Preparing activity:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

Army - IH
Air Force - 45
Navy - NU

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Army - IH

(Project No. 8455-0978)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.