INCH-POUND


MIL-DTL-3943/14H
18 February 2008
SUPERSEDING
MIL-DTL-3943/14G
18 June 2007

DETAIL SPECIFICATION SHEET

DECORATION, LEGION OF MERIT, COMMANDER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

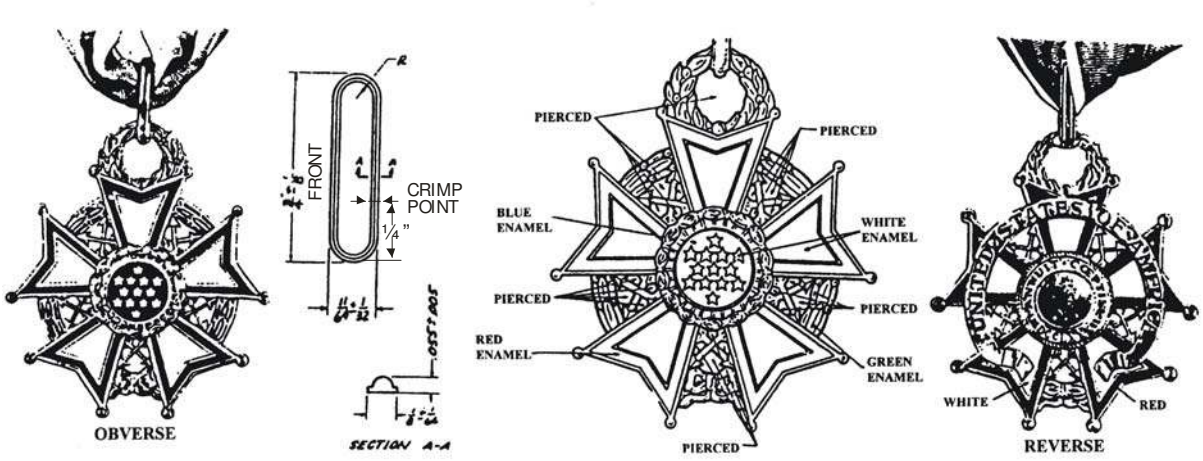

MATERIAL: Gilding Metal

FINISH:

OBVERSE: Hard Enameled, Gold Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.
REVERSE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

HEIGHT: 2-17/32 inches (REF)
WIDTH: 2-3/16 inches (REF)
THICKNESS (at thickest point): 0.245 inch ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. Enamel colors shall be as indicated. The colors shall conform to the TIOH Hard Enamel Color Chip Numbers listed below. The white enameled areas in the five (5) rays on the obverse side of the pendant shall be convex within the dikes.

COLOR	CHIP NO.
Red	4
Green	11
Blue	20
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

5. The pendant ring shall be formed from red brass and shall be soldered to the pendant the ends shall be crimped closed on the back side and be 1/4 inch above the solder point as shown.

6. The center portion of the reverse of the pendant shall be smooth, flat, and suitable for engraving.

7. The neck ribbon shall be in accordance with Figure 9.

8. Decoration set shall consist of a neck ribbon with pendant, a service ribbon with ribbon attachment, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VII, Style 5 with a Class 1 or 1A pad.

9. The ribbon for the neck ribbon and service ribbon shall conform to MIL-DTL-11589/80.

10. The lapel button shall conform to MIL-DTL-11484/10.

11. The ribbon attachment shall conform to MIL-DTL-41819/1.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Air Force - 99
Navy – MC
Coast Guard - CG
DLA - CT

Preparing activity:
Army - IH
(Project No. 8455-2008-130)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.