NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/15E
1 May 1997
SUPERSEDING
MIL-D-3943/15D
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED FLYING CROSS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

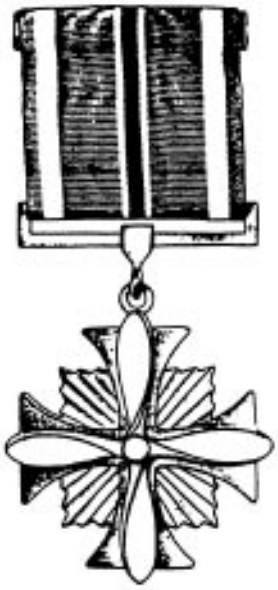

OBVERSE

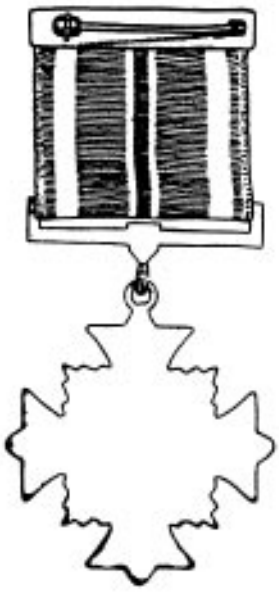

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:48Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
  PENDANT:
    HEIGHT (Including Lug):
      -1: 1-7/8 inch (4.76 cm) (REF)
      -2: 31/32 inch (2.46 cm) (REF)
    WIDTH (Overall):
      -1: 1-11/16 inch (4.29 cm) (REF)
      -2: 3/4 inch (1.91 cm) (REF)
    THICKNESS (At Thickest Point):
      -1: 0.215 inch ± 0.010 inch (0.546 cm ± 0.025 cm)
      -2: 0.105 inch ± 0.010 inch (0.266 cm ± 0.025 cm)

  SUSPENSION BAR:
    HEIGHT (Overall):
      -1: 5/16 inch (0.79 cm) (REF)
      -2: 5/32 inch (0.40 cm) (REF)
    WIDTH (Overall):
      -1: 1-1/2 inch (3.81 cm) (REF)
      -2: 3/4 inch (1.91 cm) (REF)
    THICKNESS (At thickest point):
      -1: 0.085 inch ± 0.010 inch (0.216 cm ± 0.025 cm)
      -2: 0.055 inch ± 0.010 inch (0.140 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A ring formed from red brass shall be soldered to the suspension bar. The ring for Dash No. -1 shall be formed from 0.057 ± .0.002 inch (0.145 cm ± 0.005 cm) diameter wire and shall have an outside diameter of 3/16 inch ± 1/64 inch (0.48 cm ± 0.16 cm). The ring for Dash No. -2 shall be formed from .036 inch ± .002 inch (0.091 cm ± 0.005 cm) diameter wire and shall have an outside diameter of 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm).

3. The lug for the Dash No. -1 shall be cut into the working die. The lug shall be 7/32 inch (0.56 cm) in diameter, 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) thick with a 3/32 inch ± 1/64 inch (0.24 cm ± 0.04 cm) hole. The lug shall be flush with the reverse side.

4. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

5. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/47.

6. The lapel button shall conform to MIL-DTL-11484/11.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
  Army - IH
  Air Force - 45

Preparing activity:
  Army - IH

Review activities:
  Air Force - 32, 82, 99

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:48Z
Check the source to verify that this is the current version before use.

DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:48Z
Check the source to verify that this is the current version before use.