INCH-POUND


MIL-DTL-3943/15G
30 May 2007
SUPERSEDING
MIL-D-3943/15F
30 May 2006

DETAIL SPECIFICATION SHEET


DECORATION, DISTINGUISHED FLYING CROSS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

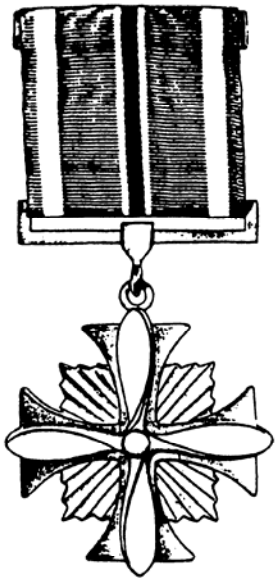

OBVERSE

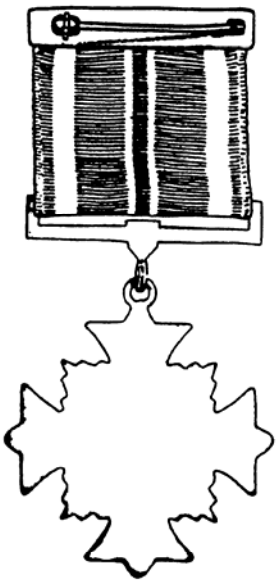

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH: Oxidized, Buffed Relieved and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
PENDANT:
HEIGHT (including lug):
-1: 1-7/8 inch (REF)
-2: 31/32 inch (REF)
WIDTH (overall):
-1: 1-11/16 inch (REF)
-2: 3/4 inch (REF)
THICKNESS (at thickest point):
-1: 0.215 inch ± 0.010 inch
-2: 0.105 inch ± 0.010 inch
SUSPENSION BAR:
HEIGHT (overall):
-1: 5/16 inch (REF)
-2: 5/32 inch (REF)
WIDTH (overall):
-1: 1-1/2 inch (REF)
-2: 3/4 inch (REF)
THICKNESS (at thickest point):
-1: 0.085 inch ± 0.010 inch
-2: 0.055 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A ring formed from red brass shall be soldered to the suspension bar. The ring for Dash No. -1 shall be formed from 0.057 ± .0.002 inch diameter wire and shall have an outside diameter of 3/16 inch ± 1/64 inch. The ring for Dash No. -2 shall be formed from .036 inch ± .002 inch diameter wire and shall have an outside diameter of 1/8 inch ± 1/64 inch.

3. The lug for the Dash No. -1 shall be cut into the working die. The lug shall be 7/32 inch in diameter, 1/16 inch ± 1/64 inch thick with a 3/32 inch ± 1/64 inch hole. The lug shall be flush with the reverse side.

4. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

5. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/47.

6. The lapel button shall conform to MIL-DTL-11484/11.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force – 11

Preparing activity:
Army - IH
(Project No. 8455-2007-067)

Review activities
Air Force - 99
DLA – CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.