NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/15L
7 March 2025
SUPERSEDING
MIL-DTL-3943/15K
2 July 2021

DETAIL SPECIFICATION SHEET


DECORATION, DISTINGUISHED FLYING CROSS

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

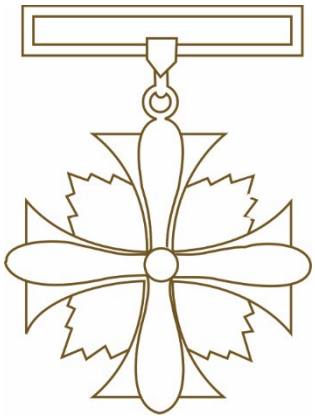

OBVERSE

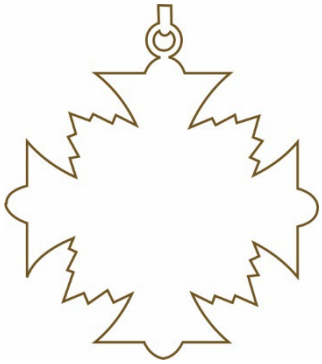

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Oxidized, Buffed Relieved and shall match The Institute of Heraldry Metal Finish Chip Number 4.

DIMENSIONS:
PENDANT:
HEIGHT (Including lug):
-1: 1-7/8 inch (REF)
-2: 31/32 inch (REF)
WIDTH (Overall):
-1: 1-11/16 inch (REF)
-2: 3/4 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

THICKNESS (At thickest point):
-1: 0.215 inch ± 0.010 inch
-2: 0.105 inch ± 0.010 inch
SUSPENSION BAR:
HEIGHT (Overall):
-1: 5/16 inch (REF)
-2: 5/32 inch (REF)
WIDTH (Overall):
-1: 1-1/2 inch (REF)
-2: 3/4 inch (REF)
THICKNESS (At thickest point):
-1: 0.085 inch ± 0.010 inch
-2: 0.055 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Style 6 with a Class 1or 1A pad.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A ring formed from red brass shall be soldered to the suspension bar. The ring for -1 shall be formed from 0.052 ± .0.002 inch diameter wire and shall have an outside diameter of 1/4 inch ± 1/64 inch. The ring for-2 shall be formed from .036 inch ± .002 inch diameter wire and shall have an outside diameter of 1/8 inch ± 1/64 inch.

3. The lug for -1 shall be cut into the working die. The lug shall be 7/32 inch in diameter, 1/16 inch ± 1/64 inch thick with a 3/32 inch ± 1/64 inch hole. The lug shall be flush with the reverse side.

4. The specification slash sheet for the ribbon for the pendant drape and for the service is MIL-DTL-11589/47.

5. The specification slash sheet for the lapel button is MIL-DTL-11484/11.

6. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2025-063)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:47Z
Check the source to verify that this is the current version before use.