
MIL-D-3943 / 16B
31 March 1987
SUPERSEDING
MIL-D-3943 / 16A
30 June 1971


MILITARY SPECIFICATION SHEET

DECORATION, SOLDIER'S MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-D-3943.

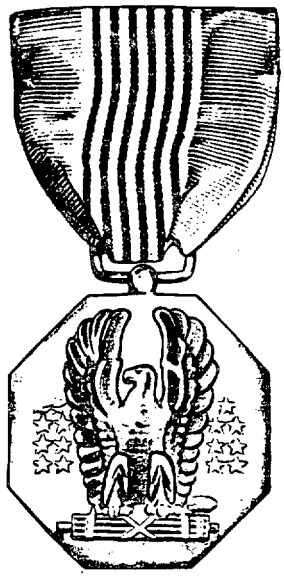

OBVERSE

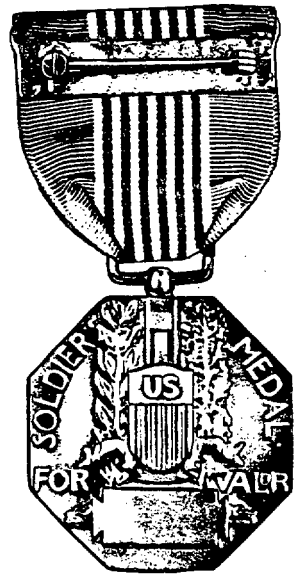

REVERSE

DASH NO.
-1: REGULAR SIZE
-2: MINIATURE SIZE

MATERIAL: RED BRASS
DIMENSIONS (INCHES):

HEIGHT (OVERALL):	WIDTH (OVERALL):	THICKNESS (AT THICKEST POINT):
-1: 1-17/32 (REF)	-1: 1-3/8 (REF)	-1: .230 ± .005
-2: 25/32 (REF)	-2: 11/16 (REF)	-2: .120 ± .005

FINISH: OXIDIZED, RELIEVED, MATTE FINISH

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:48Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE PENDANT RIBBON RING SHALL BE RECTANGULAR. FOR DASH NO. 1 THE RING SHALL BE 17/32 INCH WIDE BY 3/8 INCH HIGH (OUTSIDE MEASUREMENT) AND SHALL BE FORMED FROM .057 ± .002 INCH DIAMETER WIRE.

2. THE PENDANT RIBBON RING FOR DASH NO. 2 SHALL BE AN INTEGRAL PART OF THE LUG.

3. THE LUG FOR DASH NO. 1 SHALL NOT BE COMPLETELY DRILLED THROUGH BUT SHALL BE DRILLED A MAXIMUM OF 1/16 INCH FROM EACH SIDE. THE HOLE SHALL BE 1/16 INCH IN DIAMETER.

4. TYPE I DECORATION SET SHALL CONSIST OF A REGULAR SIZE MEDAL, A SERVICE RIBBON AND A LAPEL BUTTON ALL PACKAGED IN A PRESENTATION CASE CONFORMING TO MIL-C-14633, STYLE 6, TYPE VIII WITH A CLASS 1 OR 1A PAD.

5. THE RIBBON FOR THE PENDANT DRAPE AND SERVICE RIBBON SHALL CONFORM TO MIL-R-11589/137.

6. THE LAPEL BUTTON SHALL CONFORM TO MIL-L-11484/12.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
Other - CT

(Project No. 8455 - 0251)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:48Z
Check the source to verify that this is the current version before use.