INCH-POUND

MIL-DTL-3943/17K
27 June 2016
SUPERSEDING
MIL-DTL-3943/17J
23 November 2015

DETAIL SPECIFICATION SHEET

DECORATION, NAVY AND MARINE CORPS MEDAL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

OBVERSE

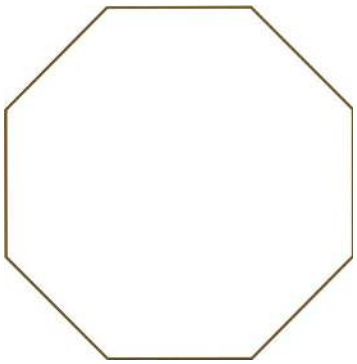
REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Oxidized, Buffed Relieved and shall match The Institute of Heraldry Metal Finish Chip Number 4.

DIMENSIONS:
HEIGHT (Including lug):
-1: 1-5/8 inch (REF)
-2: 3/4 inch (REF)
WIDTH (Overall):
-1: 1-5/16 inch (REF)
-2: 5/8 inch (REF)
THICKNESS (At thickest point):
-1: 0.150 inch ± 0.010 inch
-2: 0.085 inch ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:48Z
Check the source to verify that this is the current version before use.

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The lug for -1 shall be fabricated from 0.050 inch ± 0.002 inch nominal diameter wire with the same material and finish as the pendant. The lug shall have an outside diameter of 0.200 inch ± 0.010 inch. The lug shall be hard soldered to the top center of the pendant as shown.

3. The lug for -2 shall be fabricated from 0.031 inch ± 0.002 inch nominal diameter wire with the same material and finish as the pendant. The lug shall have an outside diameter of 0.125 inch ± 0.005 inch. The lug shall be hard soldered to the top center of the pendant as shown.

4. Reverse shall be flat and suitable for engraving.

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/106.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/13.

7. The use of any type of plastic packaging material is prohibited.

8. 8. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Navy - NU

Preparing Activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-2016-551)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:48Z
Check the source to verify that this is the current version before use.