NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/20D
1 May 1997
SUPERSEDING
MIL-D-3943/20C
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, GOLD LIFE-SAVING MEDAL AND BAR, COAST GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

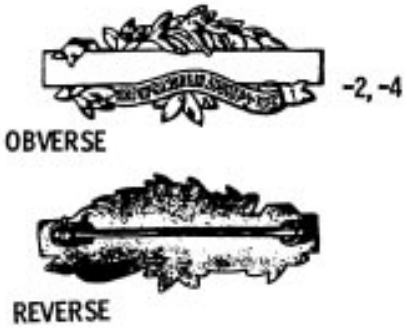

DASH NO.
-1: Gold Life-Saving Medal, Regular Size
-2: Gold Life-Saving Bar, Regular Size
-3: Gold Life-Saving Medal, Miniature Size
-4: Gold Life-Saving Bar, Miniature Size

FINISH: Matte Finish and shall match TIOH Metal Finish Chip Number 7.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:50Z
Check the source to verify that this is the current version before use.

MATERIAL:
-1, -3:
PENDANT AND SUSPENSION BAR: 24 Karat Gold
PENDANT RIBBON ATTACHMENT BAR: 21 Karat Gold
PIN, HINGE AND CATCH (ON ATTACHMENT BAR), PENDANT SWIVEL, SWIVEL EYE, ATTACHMENT RING : 14 Karat Gold

-2, -4:
PENDANT AND SUSPENSION BAR: 24 Karat Gold
PIN, HINGE AND CATCH (ON ATTACHMENT BAR): 14 Karat Gold

DIMENSIONS:
DASH NO. -1, -3:
PENDANT:
DIAMETER:
-1: 1-15/32 inches (3.73 cm) (REF)
-3: 3/4 inch (1.91 cm) (REF)
THICKNESS (At Rim):
-1: 0.120 inch ± 0.010 inch (0.305 cm ± 0.025 cm)
-3: 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)

SUSPENSION BAR:
HEIGHT (Overall):
-1: 15/16 inch (2.38 cm) (REF)
-3: 25/32 inch (1.98 cm) (REF)
WIDTH (Overall):
-1: 1-9/16 inches (3.97 cm) (REF)
-3: 25/32 inch (1.98 cm) (REF)
THICKNESS (At Thickest Point):
-1, -3: 0.095 inch ± 0.010 inch (0.241 cm ± 0.025 cm)

DASH NO. -2, -4:
HEIGHT (Overall):
-2: 9/16 inch (1.43 cm) (REF)
-4: 9/32 inch (0.71 cm) (REF)
WIDTH (Overall):
-2: 1-21/32 inches (4.21 cm) (REF)
-4: 53/64 inch (2.10 cm) (REF)
THICKNESS (At Thickest Point):
-2, -4: 0.095 inch ± 0.010 inch (0.241 cm ± 0.025 cm)

WEIGHT (Minimum):

-1 (PENDANT AND SUSPENSION BAR ONLY, ASSEMBLED):	950 Grains
-2 (INCLUDING ATTACHING DEVICE):	253 Grains
-3 (PENDANT AND SUSPENSION BAR ONLY, ASSEMBLED):	460 Grains
-4 (INCLUDING ATTACHING DEVICE):	130 Grains

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Thickness is given for information only. Weight governs.

3. The suspension bar ring shall be fabricated from 0.050 inch ± 0.002 inch (0.127 cm ± 0.005 cm) nominal diameter wire for Dash No. -1 and 0.032 inch ± 0.002 inch (0.081 cm ± 0.005 cm) nominal diameter wire for Dash No. -3. The rings shall be gold soldered to the vertical center line of the suspension bar 5/32 inch ± 1/64 inch (0.40 cm ± 0.04 cm) above the tip of the eagle's beak for Dash No. -1 and 5/64 inch ± 1/64 inch (0.20 cm ± 0.04 cm) for Dash No. -3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:50Z
Check the source to verify that this is the current version before use.

4. The swivel eye ring shall be fabricated from 0.044 inch ± 0.002 inch (0.112 cm ± 0.005 cm) nominal diameter wire for Dash No. -1 and 0.030 inch ± 0.002 inch (0.076 cm ± 0.005 cm) nominal diameter wire for Dash No. -3. The rings shall be swaged in the swivel device.

5. The swivel device shall be gold soldered to the top of the pendant.

6. The ribbon attachment bar shall conform to Type III Ribbon Bar as shown on TIOH Drawing 4-4-86.

7. The pin and catch attaching device for Dash Nos. -2 and -4 shall be located on and soldered to the horizontal center line equidistant from each side. The attaching device shall be 1-5/8 inch ± 1/64 inch (4/13 cm ± 0.04 cm) for Dash No. -2 and 13/16 inch ± 1/64 inch (2.06 cm ± 0.04 cm) for Dash No. -4.

8. Decoration set shall consist of a regular size medal and bar, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

9. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/66.

10. The lapel button shall conform to MIL-DTL-11484/7.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Coast Guard - CG
DLA - CT

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:50Z
Check the source to verify that this is the current version before use.