MIL-R-3734B
6 August 1981
SUPERSEDING
MIL-N-3734A
26 December 1973
(See 6.5)

MILITARY SPECIFICATION

RUBBER TYPE SET, NUMERICAL: VETERINARY, FOR FOOD INSPECTION STAMP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a rubber type set consisting of rubber type numerals, a container with cover and a thumb forcep.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-766	-	Steel Plates, Sheets and Strip - Corrosion-Resisting
PPP-B-566	-	Box, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-676	-	Box, Setup

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:21Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-601 - Rubber: Sampling and Testing

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

3.2 Materials (see 6.4). Materials and components shall be as specified herein and on figure 1. Materials not definitely specified shall be of the quality normally used by the manufacturer in his commercial numeral set provided the completed item complies with all provisions of this specification.

3.2.1 Corrosion-resisting steel. The corrosion-resisting sheet steel shall be class 430, finish No. 1 or better of QQ-S-766 or, any series 300, annealed, 1/4 or 1/2 hard, finish No. 1 or better of QQ-S-766.

3.2.2 Rubber. Rubber shall be a commercial grade nitrile/butadiene rubber (NBR), with a durometer hardness of 50 plus or minus 5 (see 4.4.2).

3.3 Design and construction. The rubber type set shall consist of 7 groups of rubber type numerals, a wood container with metal cover, and a thumb forcep.

3.3.1 Rubber type. The type shall be fabricated from rubber specified in 3.2.2. The type shall consist of 7 groups of numerals, 0 through 9, inclusive. Each type shall be Regular News Gothic, 24-point size, raised 0.125 inch, plus or minus 0.005 inch, above the ground. The overall height of the type shall be 0.345 inch plus or minus 0.005 inch. The base of the rubber type shall be designed so all 7 groups of numerals properly fit into the container troughs.

Source: https://assist.dla.mil -- Downloaded: 20260-16T21:21Z
Check the source to verify that this is the current version before use.

3.3.2 Container and cover. The container and cover shall be fabricated as shown in figure 1. The container body shall be a soft wood. The cover and two end plates shall be made of corrosion-resisting steel specified in 3.2.1. The nails shall be made of commercial grade stainless steel.

3.3.3 Forceps. The thumb forceps (tweezer style) for removing the type shall be made of commercial grade chromium or nickel plated spring steel. The forceps shall be approximately 1/8 inch wide by 2 inches long. The forceps shall fit into the container troughs.

3.4 Assemble type set. Put the 7 groups of numerals, numeral side up, and the forceps in the container troughs, then put the metal cover in place.

3.5 Replacement of defective components. During the manufacturing process, components having material defects or damages that are classified as defects in 4.4.3.1 and 4.4.3.2 shall be removed from production and replaced with non-defective and properly matched components.

3.6 Workmanship. The finished type set shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3.1 and 4.4.3.2. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:21Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection. Prior to fabrication of the type, a test strip of the rubber cured by the same process as the type, shall be tested for durometer hardness in accordance with Method 3021 of FED-STD-601 to determine compliance with the hardness requirements of 3.2.2. The hardness of the test strip shall be based on the average of three readings. Any nonconformance shall be cause for rejection of the rubber and replacement with a conforming product.

4.4.3 End item inspection. The type sets shall be examined in accordance with 4.4.3.1 and 4.4.3.2. The lot size shall be expressed in terms of one type set.

4.4.3.1 Visual examination. The type sets shall be examined for defects listed below. The inspection level shall be II and the acceptable quality level (AQL) shall be 2.5 major and 6.5 total (major and minor combined) defects per hundred units. The sample unit shall be one type set.

Examine	Defect	Classification Major	Minor
Construction and workmanship	Parts missing or not as specified.	X	
	Container and cover not smooth. Not clean.		X
	Not free from burrs, slivers, sharp corners or edges, fractures, scratches, or knot holes.	X	
	Dented, bent, or broken parts.	X	
	Rubber type figure outlines not clear, or not sharp.	X	
	Type set not assembled as specified.		X

4.4.3.2 Dimensional examination. The type sets shall be examined for compliance with dimensional requirements specified. Any dimension not within the specified tolerance shall be a defect. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

4.4.4 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged except that it need not be closed. Examination for closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 20260-16T21:21Z
Check the source to verify that this is the current version before use.

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of container flap, loose strapping, improper taping, or inadequate stapling. Bulged or distorted container. Open or noncontinuous heat sealed seams on polyethylene bag.
Contents	Number of intermediate packs per shipping container is more or less than required. Number of unit packs per intermediate pack is more or less than specified. 1/

1/ For this defect three intermediate packs shall be examined from each shipping container in the sample.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit pack. Each assembled type set shall be unit packed in a snug-fitting commercial polyethylene bag. The polyethylene film shall be a minimum 1 mil. thick and all seams of the bag shall be heat sealed. The seams shall be straight, continuous and parallel to each other and the formed edges of the bag. Excess air shall be withdrawn prior to the last closure.

5.1.1.2 Intermediate pack. Twelve unit packs shall be placed in a snug-fitting intermediate paperboard box conforming to variety 1, type, class and style optional of PPP-B-566 or PPP-B-676. Closure of the box shall be in accordance with the applicable box specification.

5.1.2 Commercial. Assembled type sets shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:21Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. One hundred and forty-four type sets preserved as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3c or V3s of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2 Level B packing. One hundred and forty-four type sets preserved as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), shipping containers shall conform to V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III of the appendix of the container specification, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Type sets preserved as specified in 5.1 shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs, intermediate packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. The type set is intended for use as a component in Rubber Stamp Kit, Food Inspection, MIL-R-3842, and Rubber Stamp, Fixed and Removable Type MIL-R-36967 (DLA-DM).

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When a first article is required (see 3.1, 4.3 and 6.3).
(c) Applicable level of preservation and packing required (see 5.1 and 5.2).
(d) When weather-resistant boxes are required for level B packing (see 5.2.2.1).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample consisting of one complete type set. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:21Z
Check the source to verify that this is the current version before use.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

6.5 Title change. The nomenclature and title of this specification has been changed from MIL-N-3734 Numeral Set (Rubber Type, Veterinary, For Food Inspection Stamp) to MIL-R-3734 Rubber Type Set, Numerical: Veterinary, For Food Inspection Stamp.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - MS
Air Force - 99

Review activity:

Army - MD

User activity:

Air Force - 03

Preparing activity:

Army - GL

Project No. 7520-0175

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:21Z
Check the source to verify that this is the current version before use.

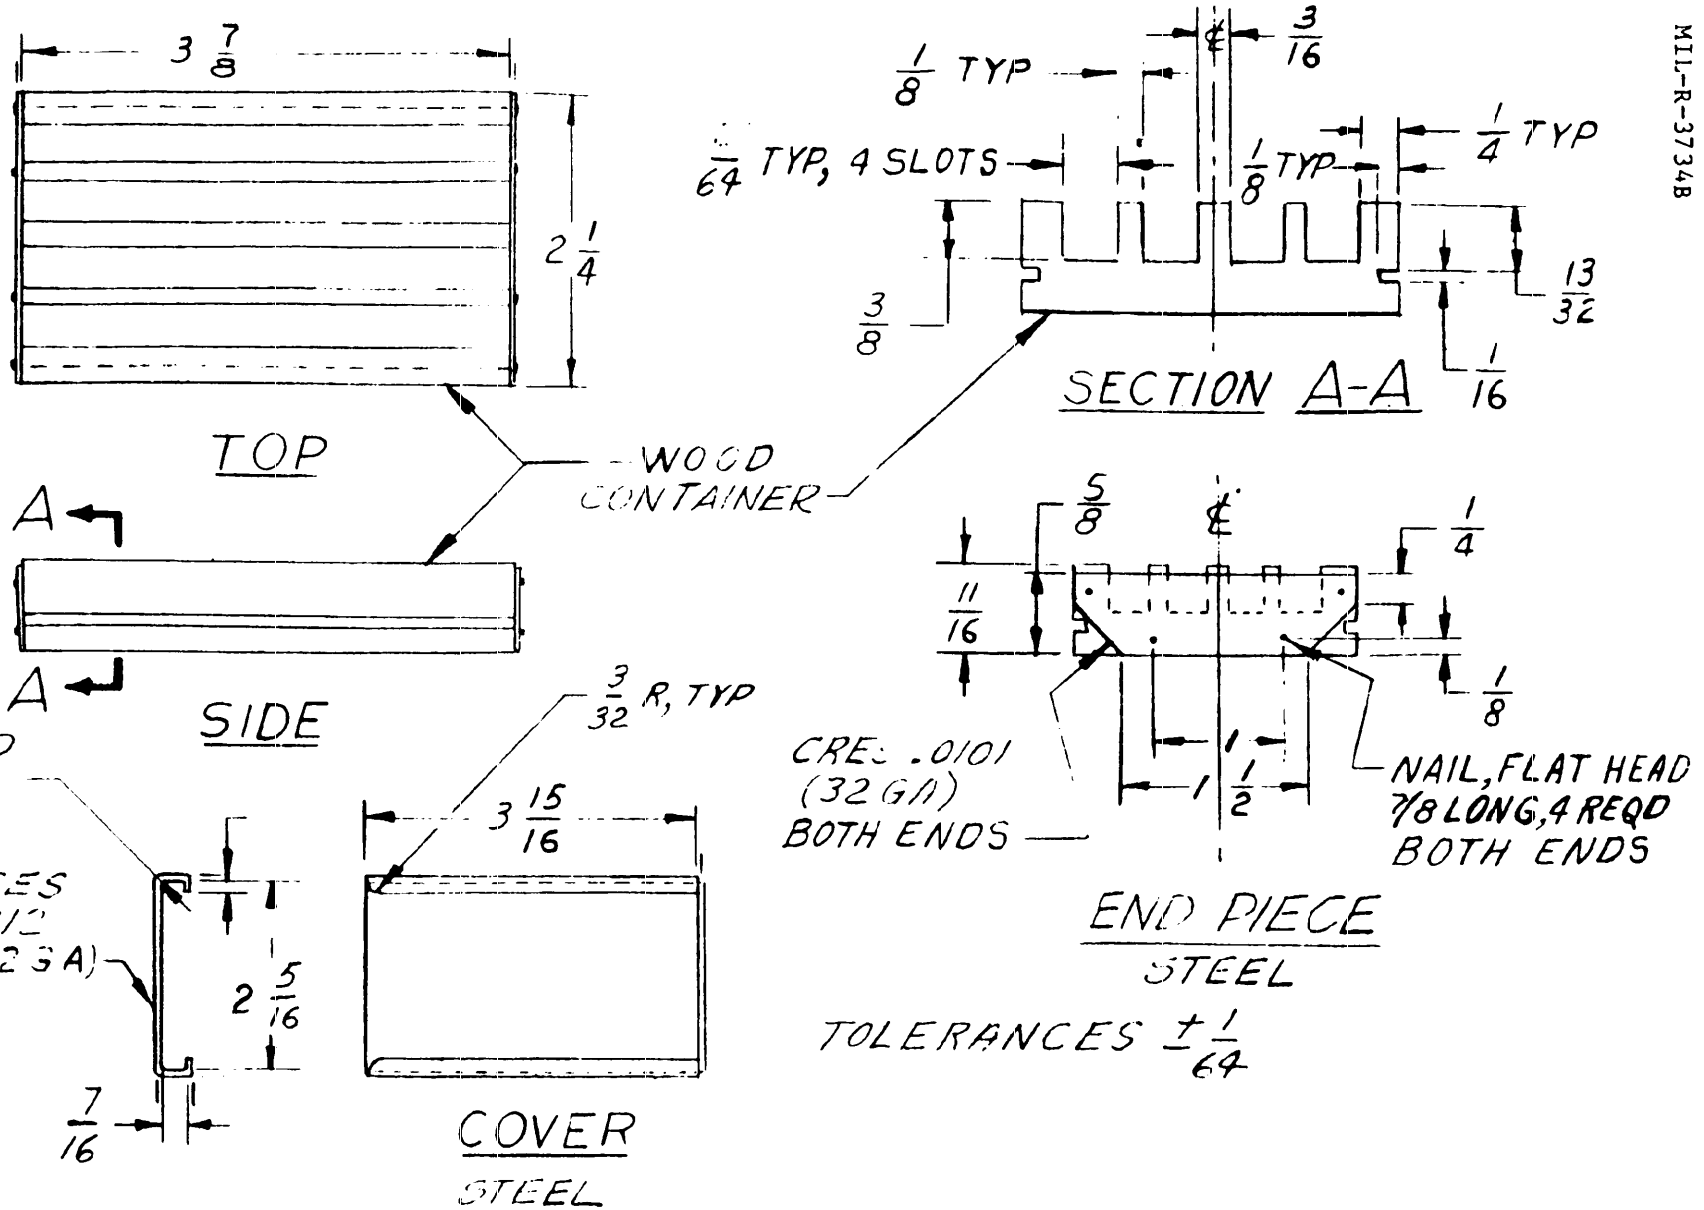


FIGURE 1. RUBBER TYPE SET, NUMERICAL, VERTICAL, FOR FOOD INSPECTION STAMP, CONTAINER AND COVER FOR

Source: https://assist.dla.mil -- Downloaded: 2026-02-10-16T21:21Z
Check the source to verify that this is the current version before use.