GG-B-750c
APRIL 30, 1962

SUPERSEDING
Int. Fed. Spec. GG–B–00750b(GSA–FSS)
July 11, 1961 and
Fed. Spec. GG–B–750
December 23, 1958

FEDERAL SPECIFICATION

BRUSH, FIBER, ROTARY WHEEL, (FOR DENTAL LATHE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers rotary wheel fiber brushes designed for attachment to chucks on dental lathes for cleaning and polishing prosthetic appliances.

1.2 Classification.

1.2.1 *Types, grades, and sizes.* Rotary wheel fiber brushes shall be of the following types, grades, and sizes, as specified (see 6.1):

Type I.—Converging fibers.
Grade A.—Stiff fibers.
Size No. 12.—1-⅞ inches in diameter.
Size No. 20.—2-½ inches in diameter.
Size No. 23.—2-¾ inches in diameter.
Size No. 27.—3 inches in diameter.

Type II.—Straight fibers.
Grade A.—Stiff fibers.
Size No. 25.—2-¾ inches in diameter.
Size No. 29.—3 inches in diameter.
Grade B.—Soft fibers.
Size No. 26.—2-¾ inches in diameter.
Size No. 30.—3 inches in diameter.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:
UU–P–271—Paper, Wrapping, Waterproofed Kraft.
PPP–B–566—Boxes, Folding, Paperboard.
PPP–B–585—Boxes, Wood, Wirebound.
PPP–B–601—Boxes, Wood, Cleated-Plywood.
PPP–B–621—Boxes, Wood, Nailed and Lock-Corner.
PPP–B–636—Box, Fiberboard.
PPP–B–676—Boxes, Set-up, Paperboard.

Federal Standards:
Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL–A–140—Adhesive, Water-Resistant, Waterproof Barrier-Material.

MIL–B–10377—Box, Wood, Cleated, Veneer, Paper Overlaid.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following publication, of the issue in effect on date of invitation for bids, forms a part of this specification.

American Dental Association Publication:
Accepted Dental Remedies

(Accepted Dental Remedies is published annually, under the immediate supervision of the Council on Dental Therapeutics of the American Dental Association, 222 East Superior Street, Chicago 11, Illinois.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Fiber.* Fiber shall be of either grade A or grade B (see 1.2.1). All stock shall be sterilized by the steam under pressure, or the dry heat method as described in Accepted Dental Remedies (see 2.2), straightened, and properly dressed, and shall meet the minimum weight requirement when tested as specified in 4.4.1.

3.1.1.1 *Grade A, stiff fiber.* Grade A, stiff fiber shall be 100 percent stiff black hog bristle, butt-cut from bristle 2-¼ inches long, or shall be of any other animal-fiber stock equal in color and texture to 100 percent stiff black hog bristle, butt-cut from bristle 2-¼ inches long.

3.1.1.2 *Grade B, soft fiber.* Grade B, soft fiber shall be 100 percent goat hair. Unless otherwise specified, color shall be white (see 6.1).

3.1.2 *Block.* The center block shall be made of dogwood or any other close-grained, air-dried hardwood, suitable for the purpose.

3.2 **Construction.** Fibers shall be mounted on a center block of wood as specified in 3.1.2. The fibers shall be securely staple-set or wire drawn with brass brush wire. Spindle holes shall be centered and tapered to fit standard lathe spindle chucks. Wood block and spindle holes shall be smoothly finished.

3.3 **Physical requirements.** Physical requirements of the brushes shall be as specified in table I.


3.4 **Style and design.** The brushes shall be of the style and design as shown in figure I, for the type specified.

3.5 **Workmanship.** Workmanship shall be first class throughout. Rotary wheel fiber brushes shall be free from defects which detract from their appearance or may impair their serviceability.


4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 **Supplier responsibilities for inspection.** The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

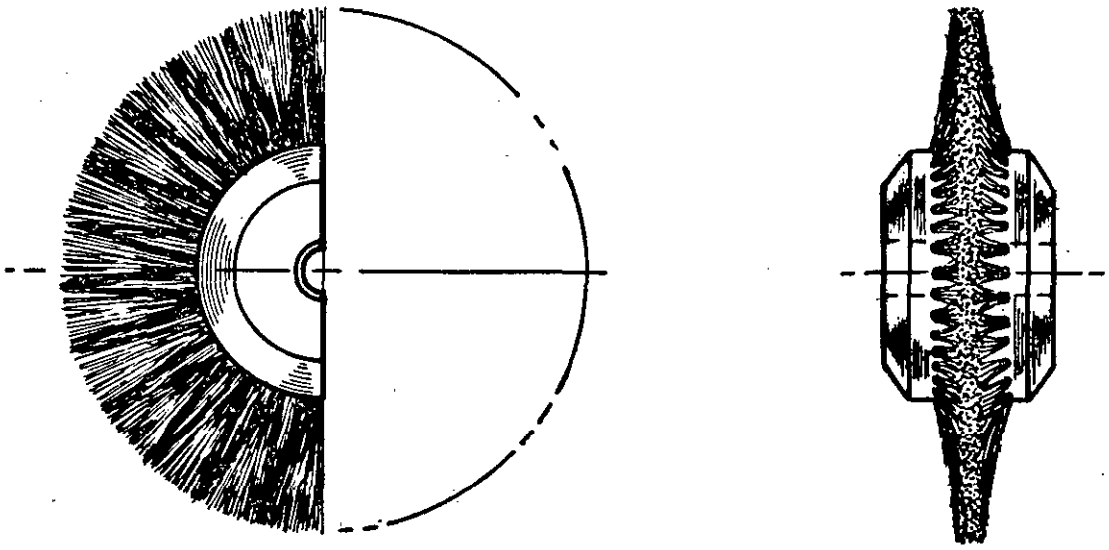

TYPE I CONVERGING

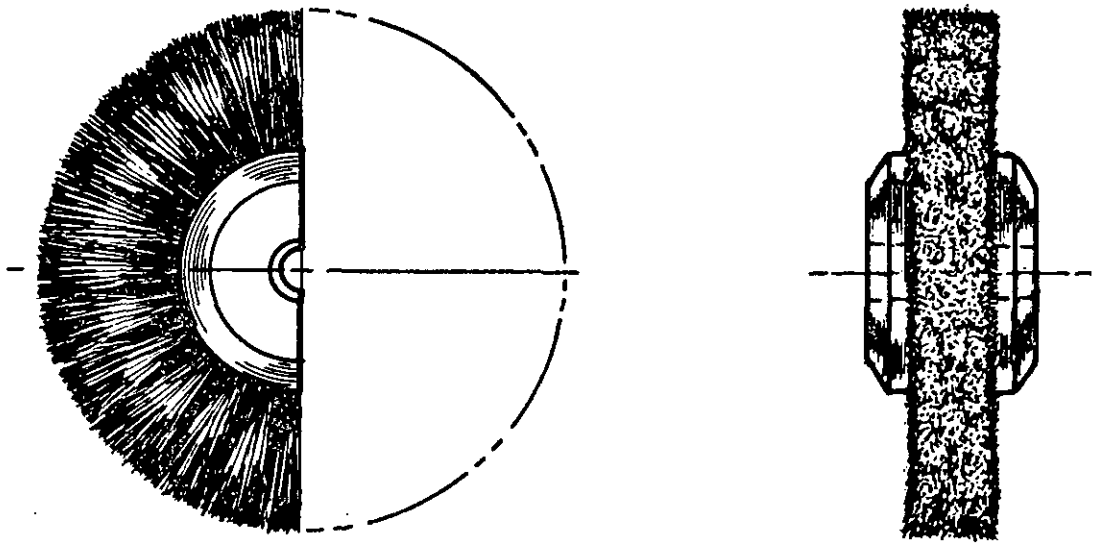

TYPE II STRAIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

TABLE I.—*Physical requirements*

	Type I, converging fiber				Type II, straight fiber			
	Grade A stiff				Grade A stiff		Grade B. soft	
	Size No.				Size No.		Size No.	
	12	20	23	27	25	29	26	30
Diameter overall (inches) [1]	1⅞	2½	2¾	3	2¾	3	2¾	3
Block:								
Diameter (inches) [1]	⅞	1¼	1¼	1½	1¼	1½	1¼	1½
Thickness (inch) [1]	9/16	5/8	5/8	1.0	⅞	1.0	⅞	1¼
Diameter of spindle hole at small end of taper (inch)	¼	¼	¼	¼	¼	¼	¼	¼
Number of holes for fiber (minimum)	40	54	75	96	75	96	75	96
Number of rows of holes	2	2	3 [2]	3 [2]	3	4	3	4
Fiber:								
Hold of fiber in block, minimum (inch)	⅛	⅛	⅛	⅛	⅛	⅛	3/16	⅛
Length outside of block, minimum (inch)	½	13/32	13/32	¾	13/32	¾	¾	¾
Weight per brush, minimum (ounce)	2/25	6/25	2/5	2/5	2/5	2/5	8/25	2/5

[1] Tolerance ± 0.0625 inch.
[2] Only outer rows of fiber shall converge.

deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *General.* The provisions contained in this section are applicable to inspection performed by and for the Government. Sampling, inspection, and test procedures for components or materials described shall be in accordance with this specification and with specifications and standards referenced herein to the extent applicable, except that this specification shall govern in the event of conflict.

4.1.2 Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 *Certificates of quality.* When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 **Sampling.** Sampling shall be conducted in accordance with MIL–STD–105.

	Inspection level	AQL (percent defective)	Minimum sample size
For visual examination:			
Major defects	II	1.0	.....
Minor defects	II	2.5	.....
For dimensional examination:			
Major defects	L7	1.0	.....
Minor defects	L7	2.5	.....
For weight test:	L4	1.0	3

4.3 **Inspection.** The brushes shall be inspected to determine compliance with applicable requirements contained in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

4.3.1 *Classification of defects for visual examination.* Inspection shall be conducted in accordance with the following classification of defects:

	Categories and defects [1]
Major:	
101.	Fiber holes not evenly spaced around periphery of block.
102.	Minimum number of fiber holes not as specified in table I.
103.	Number of rows of holes in block not as specified in table I.
104.	Block not free of cracks or splits.
105.	Spindle hole not perfectly centered or tapered to fit standard lathe spindle chucks.
106.	Fibers not securely staple-set or wire-drawn.
107.	Hold lenght of fiber in blcok less than minimum specified in table I.
Minor:	
201.	Wood block and spindle hole therein not smoothly finished.
202.	Labels on packages not legible and free of defacing marks, scratches, and tears.

4.3.2 *Classification of defects for dimensional examination.* Inspection shall be conducted in accordance with the following classification of defects:

	Categories and defects [1]
Major:	
301.	Minimum length of fiber outside block not as specified in table I.
302.	Block diamcter and thickness not within tolerances specified in table I.
Minor:	
401.	Dimensions (other than those classified as major defects) not as specified.

[1] Inspection is not restricted to the classified possible defects listed above.

4.4 Tests.

4.4.1 *Weight of fiber.* Fiber shall be conditioned for not less than 16 hours in air at a relative humidity of 65 ± 2 percent and at a temperature of 70° to 80° Fahrenheit. The weight of fiber shall be determined in the same atmosphere.

5. PREPARATION FOR DELIVERY

The levels of preservation, packaging and packing protection, used are defined in Fed. Std. No. 102 for civil agencies only.

5.1 Packaging.

5.1.1 *Level A.*

5.1.1.1 *Unit package.* Each brush shall be completely wrapped in tissue paper and packaged in a carton of appropriate size constructed in accordance with PPP–B–566 or PPP–B–676. Carton shall contain a sufficient quantity of flake naphthalene to insure against insect or vermin infestation. Closure shall be adequate to prevent spillage of contents under normal handling.

5.1.1.2 *Intermediate package.* Twelve brushes packaged as specified in 5.1.1.1 shall be intermediately packaged in a carton of appropriate size constructed in accordance with PPP–B–566 or PPP–B–676. Closure shall be adequate to prevent spillage of contents under normal handling. Carton shall be wrapped with waterproofed kraft paper conforming to class C–1 of UU–P–271, and sealed with adhesive conforming to MIL–A–140.

5.1.2 *Level B.*

5.1.2.1 *Unit package.* Unit package shall be as specified in 5.1.1.1.

5.1.2.2 *Intermediate package.* Twelve brushes packaged as specified in 5.1.2.1 shall be intermediately packaged in a carton of appropriate size constructed in accordance with PPP–B–566 or PPP–B–676. Closure shall be adequate to prevent spillage of contents under normal handling.

5.1.3 *Level C.* Brushes shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 *Level A.* Brushes packaged as speci-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

fied in 5.1.1.1 and 5.1.1.2 shall be packed in exterior containers designed for type 2 load and constructed in accordance with PPP–B–585, style 3, for class 2 use; PPP–B–601, table II, using type III, class 1 plywood; PPP–B–621, table III; or MIL–B–10377, table II. Strapping, when required shall be in accordance with applicable box specification.

Note. Strapping will not be required for shipment forwarded to a receiving activity within the continental limits of the United States for storage and distribution.

5.2.2 *Level B.* Brushes packaged as specified in 5.1.2.1 and 5.1.2.2 shall be packed in exterior containers conforming to PPP–B–601, table I, using type III, class 1, plywood, or shall be designed for type 2 load and constructed in accordance with PPP–B–585, style 3, for class 2 use; PPP–B–621, table I, PPP–B–636, type 1, fabricated from not less than 275-pound test fiberboard, or MIL–B–10377, table I.

5.2.3 *Level C.* The subject commodity shall be packed in substantial commercial containers of the size, type, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 *Nonmilitary.*

5.3.1.1 *Packages.* Unless otherwise specified, packages shall be marked with the name, type, and size of material, the quantity contained therein, and the name of the contractor and manufacturer.

5.3.1.2 *Shipping containers.* In addition to any special marking in the contract or order, exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military.*

5.3.2.1 *Unit package.* Each unit package shall be marked with stock number, item identification, unit, quantity, and name of contractor.

5.3.2.2 *Intermediate package.* Each intermediate package shall be marked in accordance with section 5 of MIL–STD–129.

5.3.2.3 *Shipping containers.* Shipping containers shall be marked in accordance with MIL–STD–129. Service color and service symbol markings are required only on direct shipments from the contractor's plant to overseas activities.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, symbol, and date of this specification.
(*b*) Type, grade, and size required (see 1.2.1).
(*c*) When color other than white is required (see 3.1.1.2).
(*d*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
  (1) Level B packaging is intended to provide economical but limited protection, and should be specified only when it is determined the brushes will be held in covered storage approximately 12 months from date of initial packaging.

6.2 Storage surveillance. Items packaged in accordance with Level B requirements must be inspected to determine condition when not used within the time period indicated in 6.1 (*d*) (1). Items not used within the time period specified must be repackaged in accordance with level B requirements in this specification or with level A requirements if storage beyond additional year is anticipated.

6.3 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Federal Government requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

6.4 Transportation description. Transportation descriptions and minimum weights applicable to this item are:

Rail:

Brushes, not otherwise indexed by name.
Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Brushes, not otherwise indexed.
Truckload minimum weight 24,000 pounds, subject to Rule 34, National Motor Freight Classification.

Notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:
Army—M
Navy—Md
Air Force

Copies of this specification may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.