GG-T-671/5B
March 10, 1981
SUPERSEDING
Fed. Spec. GG-T-671/5A
November 24, 1975

FEDERAL SPECIFICATION SHEET

TRIANGLES, DRAFTING, STEEL, BEAD SUPPORTS AND LIFTING KNOB


This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring triangles described herein shall consist of this document and the latest issue in effect of Federal Specification GG-T-671.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification sheet covers the specific requirements for Type V steel triangles with bead supports and a lifting knob.

1.2 Classification. The triangles covered by this specification shall have a definitive Federal specification part number and shall be designated in the following form (see 6.2 and 6.3).

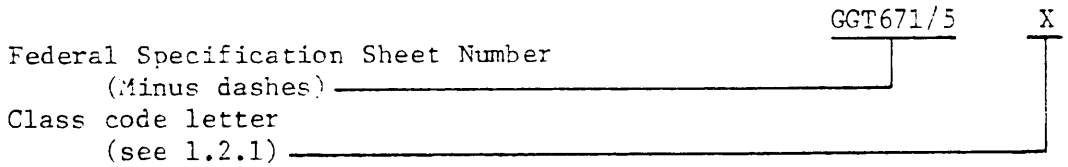

FSC 6675

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

1.2.1 Class of triangle. The class of triangles is identified by a single letter (see Table I).

Table I. Class code letter

Code	Class
A	A
B	B

Class A - 30 degrees - 60 degrees (6-inch side opposite the 60 degree angle).
Class B - 45 degrees - (6-inch sides opposite the 45 degree angles).

3. REQUIREMENTS

3.1 Description. Triangles shall be in accordance with GG-T-671 and as specified herein.

3.2 Fabrication. Triangles shall be corrosion-resisting steel with a thickness of 0.09 ± 0.01 inch. The angles shall be within plus or minus 2 minutes of the angle specified. The outside or ruling edges shall be straight and true within plus 0.003 inch. The surfaces of the triangles shall be flat and true within 0.010 inch.

3.2.1 Edges. Triangles shall be square-edged on the two short sides and bevel-edged on the long side. The bevel edge shall be squared at the bottom for a uniform thickness of not less than 0.02 inch and shall be beveled uniformly at an angle of approximately 30 degrees to the top surface.

3.2.2 Bead supports. Corner beads shall be not less than 1/8 inch in diameter and located on the underside of the triangle. The corner beads shall provide a clearance of 0.06 to 0.07 inch between the underside of the triangle and the flat surface.

3.2.3 Lifting knobs. Each triangle shall have a knurled knob not less than 1/2 inch in diameter and shall extend not less than 1/2 inch above the top surface. The knob shall be fastened into the top surface of the triangle by means of a countersunk screw at, or close to, the center of balance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Clearance test. Place the triangle with the bead supports resting on a precision flat. Measure the distance between the bottom edge of the triangle and the flat. Nonconformance to 3.2.2 shall constitute failure of this test.

6. NOTES

6.1 Intended use. The triangles are used for drawing guidelines on wet film or plastic sheets.

6.2 Ordering data. Procurement documents should specify those desired options offered in GG-T-671 and should also specify the following:

(a) Federal specification sheet part number required (see 1.2).

6.3 Federal specification part number definition. The Federal specification part number is a definitive part number which corresponds to the class of triangles covered by this specification sheet and defines the requirements of the options presented under this specification. The Federal specification part number is formed by combining the Federal specification number (without the dashes) with a dash after it and the class of triangle code letter as shown in 1.2.

MILITARY INTERESTS:

Custodians:
Army - ME
Air Force - 99

Review activity:
DLA - GS

User activity:
Navy - YD

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
VA - DMS

Preparing activity:

Army - ME

Project 6675-0706

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

GG-T-671/5B Triangles, Drafting, Steel, Bead Supports & Lifting Knob

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.