GG-T-671/6D
March 10, 1981
SUPERSEDING
Fed. Spec. GG-T-671/6C
November 24, 1975

FEDERAL SPECIFICATION SHEET

LINE GUIDE, LETTERING, ADJUSTABLE, PLASTIC


This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring line guides described herein shall consist of this document and the latest issue in effect of Federal Specification GG-T-671.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification sheet covers the specific requirements for Type VI adjustable lettering line guides.

1.2 Classification. The line guides covered by this specification shall have a definitive Federal specification part number and shall be designated in the following form (see 6.2 and 6.3).

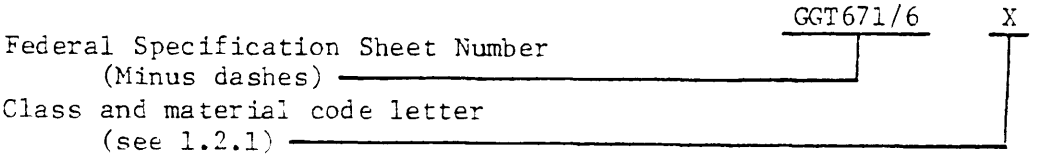

FSC 6675

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

1.2.1 Class and material of line guides. The class and material of line guides are identified by a single letter (see Table I).

Table I. Class and material code letter

Material 1/	Class	
	A	B
Polycarbonate	C	H
Acrylic	D	I
Polystyrene	E	J
Vinyl	F	K
Methacylate	G	L

Class A - 75 degree slant edge.
Class B - 90 degree slant edge.

3. REQUIREMENTS

3.1 Description. Line guides shall be in accordance with GG-T-671 and as specified herein.

3.2 Construction. The line guide shall consist of a frame and a disk which, when inserted into the frame, permits 360 degree rotation of the disk. The surfaces shall be flat and true within 0.010 inch. Knockout indentions are permitted.

3.2.1 Frame. The frame shall be 3-3/4 inches long at the base and 2-3/8 inch high, with tolerance of plus or minus 1/4 inch. The outer edges shall form angles with the base of 68 degrees and 75 degrees or 90 degrees as applicable to permit the edges to be used for slant lines. The 68 degree slant edge shall be on the right side and the 75 degree or 90 degree slant edge shall be on the left when facing the line guide. The angles of the slant edges shall be within $\pm$ 2 minutes of the specified angle. The inside of the frame shall form a receptacle to hold the disk in such a manner as to permit the disk to rotate 360 degrees. The thickness shall be 0.010 $\pm$ 0.010 inch.

3.2.2 Disk. The disk shall have not less than 31 guideline holes arranged in three columns. When facing the disk, the left column of holes shall be marked with the fraction 3/5; the center column of holes shall be marked with the number 10; and the right hand column holes shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

be marked with the fraction 2/3, to represent the ratio of the space between the guidelines to the total height of the letter to be drawn. The columns of holes shall be grouped for adjustment in height to facilitate drawing lettering guidelines of all heights within the range of 1/16 inch minimum to 1-1/2 inches maximum. All guideline holes shall be tapered and of suitable diameter to permit the point of a standard drawing pencil to extend through the disk for marking guidelines. The disk shall be graduated and numbered, beginning with 2, each graduation represents a distance of 1/32 inch between the guidelines; i.e., graduation 2 represents 2/32 inch; graduation 3 represents 3/32 inch, etc. The material thickness of the disk shall be 0.080 $\pm$ 0.010 inch.

3.2.3 Graduations, index marks, and numbers. All graduations, index, marks, and numbers shall be indented, molded, etched, or otherwise permanently and legibly marked on the item.

3.3 Material. In addition to the plastic materials specified in 3.2.1 of GG-T-671, polycarbonate plastic is also acceptable.

3.4 Optional features. In addition to the above features, the following may be included in the frame: 16 tapered spacing holes, spaced 1/8 inch apart, 2 inches high with marks 1/4 inch apart and the 1 inch and 2 inch marks marked; a finish mark symbol; a meter index; and 1/16, 3/32, and 1/8 fractions. On the disk, a column of 6 guideline holes for metric spacing with the appropriate indexes may be included.

4. QUALITY ASSURANCE PROVISIONS

4.1 Accuracy test. With the index mark set at any point and the line guide against a straightedge, draw lines with a well-sharpened 6H pencil using the 3/5 and 2/3 scale. Lines not spaced at a ratio of 3/5 and 2/3, as applicable, shall constitute failure of this test. The index mark shall then be set at 2 and, using the 3/5 scale, draw lines with the pencil in the first and third holes from the bottom. The index mark shall then be set at 10 and again using the 3/5 scale, draw lines using the top and bottom holes. Measure the spacing between the first two lines and the second two lines. Lines not spaced 1/16 inch apart for the first two lines and 1-1/2 inches apart for the second two lines shall constitute failure of this test.

6. NOTES

6.1 Intended use. The line guides are used for drawing guidelines for freehand lettering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify those desired options offered in GG-T-671 and should also specify the following:

(a) Federal specification sheet part number required (see 1.2).

6.3 Federal specification part number definition. The Federal specification part number is a definitive part number which corresponds to the class of line guides covered by this specification sheet and defines the requirements of the options presented under this specification. The Federal specification part number is formed by combining the Federal specification number (without the dashes) with a dash after it and the class and material of line guide code letter as shown in 1.2.

MILITARY INTERESTS:

Custodians:
Army - ME
Air Force - 99

Review activity:
DLA - GS

User activities:
Navy - MC, CG, YD

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
VA - DMS

Preparing activity:

Army - ME

Project 6675-0707

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.