FEDERAL SPECIFICATION

TRIMMER, ANIMAL TOENAIL

This specification was approved by the Commissioner, Federal Supply Services, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 This specification covers one type of animal toenail trimmer, designed to safely cut or trim a dog's nails without crushing or cracking the nail, and suitable for use in veterinary procedures.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

GG–I–526 — Instruments, Dental and Surgical; General Specifications.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL–P–12902 — Packaging of Surgical, Dental and Veterinary Instruments, Diagnostic Equipment, and Related Items.

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Material.**—Material shall be as hereinafter specified. When materials are used which are not specifically designated, they shall be of the quality best suited for the purpose intended.

3.1.1 *Handles and front plate.*—Handles shall be formed from 19 gage (0.042 inch) thick, cold-rolled steel. Front plates shall be formed from 18 gage (0.050 inch) thick, cold-rolled steel.

3.1.2 *Blades.*—Cutting blade and stationary blade shall be made from cold-rolled, annealed spring steel.

3.1.2.1 *Hardness.*—Hardness of the movable cutting blade shall be Rockwell C55–60; hardness of the stationary blade shall be Rockwell C44–48, when tested as specified in 4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.

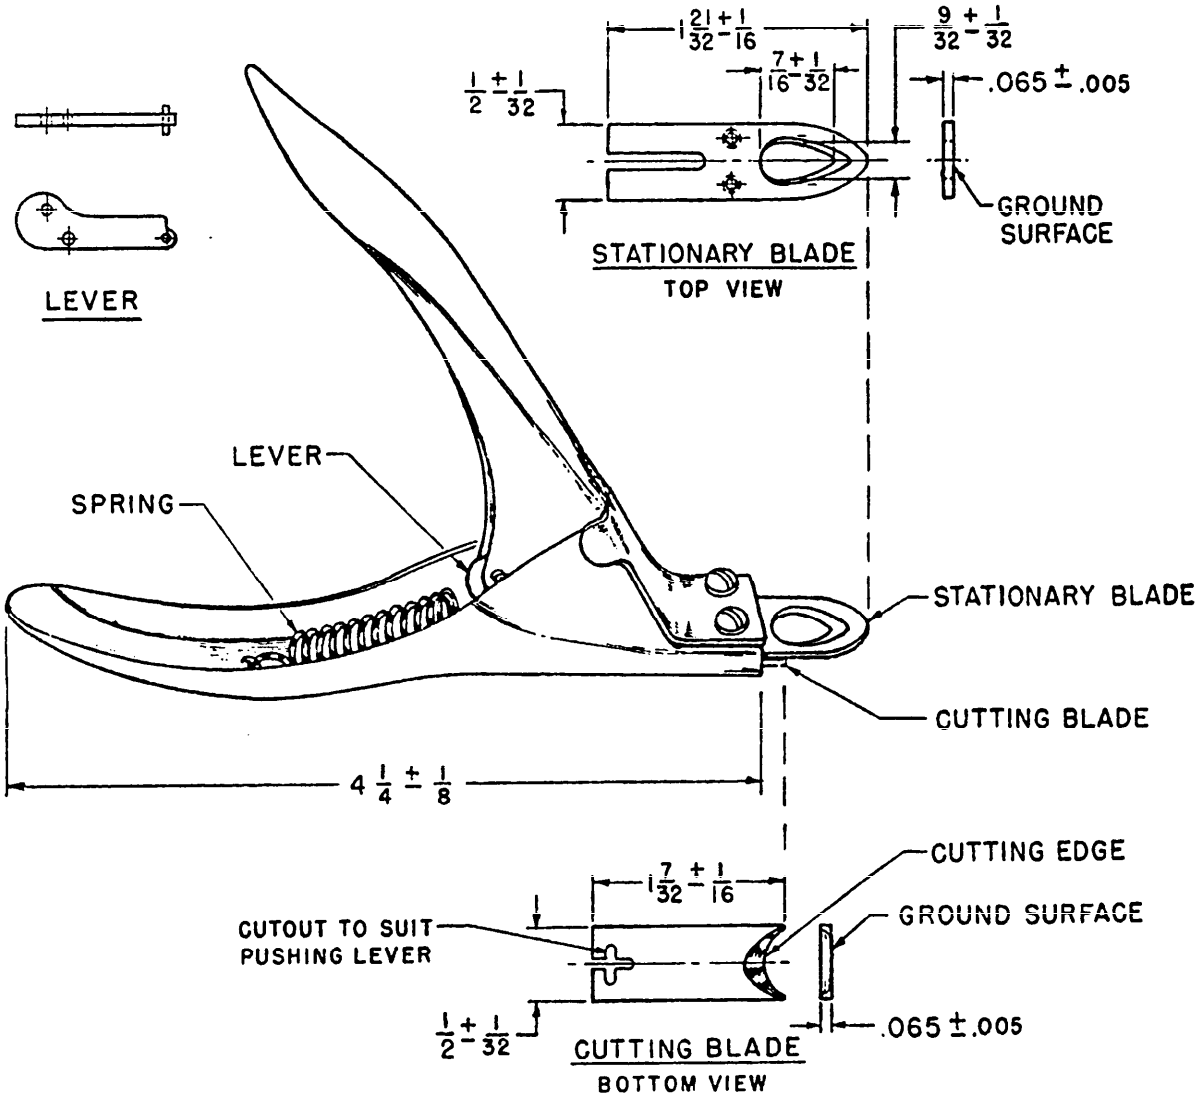


FIGURE 1.

3.1.2.2 *Thickness.* — Thickness of blades shall be ground to a thickness of 0.065 inch ± 0.005 inch.

3.2 **Construction.**—The trimmer shall consist of two pivot-joined handles, a front plate, a spring, a movable blade with a concave-shaped cutting edge, and a stationary blade with a cutout. By inserting the dog's nail into the cutout of the stationary blade and pressing the handle, the movable blade shall slide in an upward direction and slice off the nail. Handles shall be returned to their original position by means of a spring when pressure on the handles is released. The trimmer shall be as shown on figure 1.

3.3 **Dimensions.**—Dimensions shall be as shown on figure 1.

3.4 **Finish.**—Blades shall have a black oxide finish, except for the sliding surfaces which are in contact with each other, and for the sharpened sections of the blade; spring and nut shall have a black oxide finish. Handles, front plate, rivet, and screws shall have a bright nickel-plated finish, and shall withstand the corrosion tests specified for class 1 material in Federal Specification GG–I–526.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:52Z
Check the source to verify that this is the current version before use.