
MILITARY SPECIFICATION SHEET


FILTERS AND CAPACITORS, RADIO FREQUENCY/ELECTROMAGNETIC INTERFERENCE SUPPRESSION, HERMETICALLY SEALED ON ONE END ONLY, STYLE FS73

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-28861.

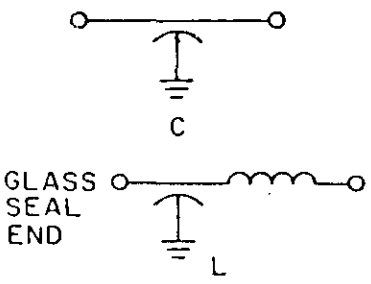

CIRCUIT DIAGRAMS

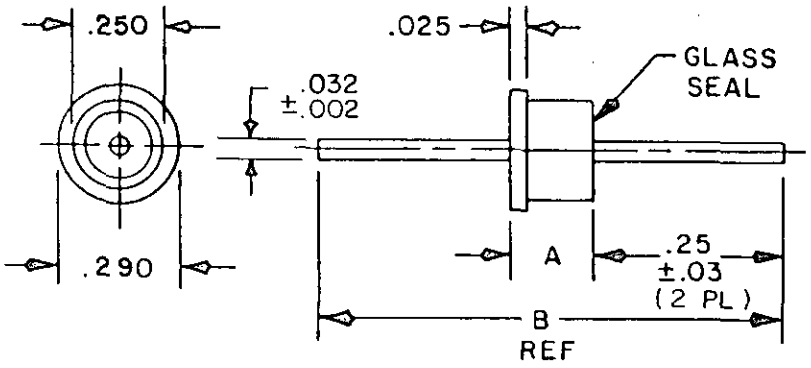

CONFIGURATION A

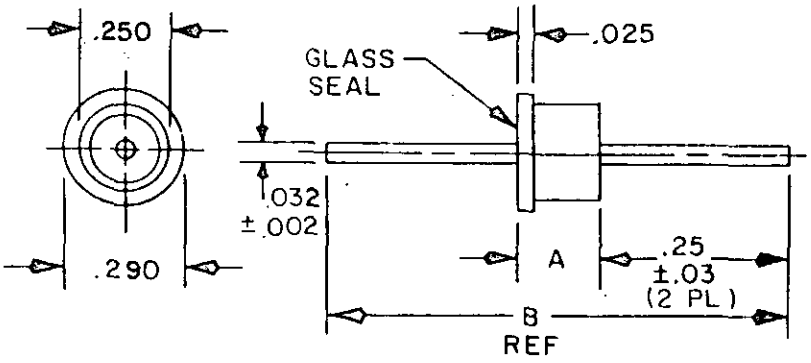

CONFIGURATION B

Inches	mm
.002	0.05
.005	0.13
.025	0.64
.03	0.8
.032	0.81
.150	3.81
.165	4.19
.200	5.08
.250	6.35
.290	7.37
.650	16.51
.750	19.05

Circuit diagram	A ±.005	B REF
L	.250	.750
C	.150	.650

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005.
4. Circuit diagram is for information only.
5. Filters shall be supplied with 60/40 solder perform.
6. Potting on nonhermetically seal end shall not extend beyond .030 inch (0.76 mm) from the filter body.
7. Filters shall be installed using the recommended installation methods (solder-in style) of MIL-F-28861.

FIGURE 1. Case and hardware dimensions and circuit diagrams.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1. Filters and capacitors shall be hermetically sealed on one end as shown on figure 1 for the respective style.

Weight: .25 gram, maximum for C circuit parts.
.75 gram, maximum for L circuit parts.

Case and lead finish: G only (gold-plated).

Terminals: Solderable.

Operating temperature range: -55°C to +125°C.

Rated voltage: See table I.

Rated current: 10 amperes, maximum.

Capacitance to ground: See table I for capacitance value.

Dissipation factor: 3.0 percent maximum.

Voltage and temperature limits of capacitance: +15, -40 percent.

Insulation resistance:

At +25°C: 1,000 megohm-microfarad or 100,000 megohms minimum, whichever is less.

At +125°C: 100 megohm-microfarad or 10,000 megohms minimum, whichever is less.

Insertion loss: At +25°C: In accordance with table I.
At -55°C and +125°C: A 3 dB degradation from the +25°C value shall be allowed.

Voltage drop: .10 volt dc, maximum.

DC resistance: 0.01 ohm, maximum.

Seal: Not applicable.

Temperature rise: +35°C, maximum.

Solderability of terminals: In accordance with MIL-F-28861 except temperature of solder shall be 300°C ±5°C.

Resistance of soldering heat: In accordance with MIL-F-28861 except temperature of solder shall be 300°C ±5°C.

Solderability of mounting termination: In accordance with MIL-F-28861 except temperature of solder shall be 300°C ±5°C.

Product assurance level: Classes B and S.

Part number: The part number shall be as follows:

M28861/14- XXX X X

XXX: Dash no. per figure 1 and table I

X: Case finish

X: Product assurance level per MIL-F-28861

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:10Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number		Circuit	Product assurance level		Rated voltage dc volts	Capacitance (pF) -0, +100 percent	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ 2/					
Configuration			Class				500 kHz	1 MHz	10 MHz	100 MHz	1,000 GHz	10 GHz
A	B		B	S								
001	007	L	X	X	100	100,000	14	20	39	52	70	70
002	008	C	X	X	100	100,000	14	20	38	48	70	70
003	009	L	X	X	200	22,000	2	8	27	45	65	70
004	010	C	X	X	200	22,000	2	8	26	40	58	70
005	011	L	X	X	300	10,000	-	3	20	38	55	60
006	012	C	X	X	300	10,000	-	3	20	35	52	60

1/ Insertion loss measurements shall be made under full load over the frequency range of 1 MHz to 10 MHz. Insertion loss measurements above this frequency range shall be made under no load.

2/ The insertion loss requirements between any two adjacent specified frequencies shall be that of the lower of the two frequencies in order to accommodate resonant dips.

Marking: Class B capacitors and filters shall not be marked. Class S filters and capacitors shall be marked with a green dot in accordance with color number 14187 of FED-STD-595. Full marking, in accordance with MIL-F-28861, shall be marked on the unit package.

Cataloging information: Dash numbers 002, 004, 006, 008, 010, and 012 shall be cataloged under FSC 5910 as feed-through ceramic capacitors. Dash numbers 001, 003, 005, 007, 009, and 011 shall be cataloged under FSC 5915 as radio frequency interference filters.

SUPERSESSION: This specification sheet supersedes drawing number 84081, FSCM 14933 when a qualified source is available.

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 59GP-0051-9)

U.S. GOVERNMENT PRINTING OFFICE: 1986 - 704-036/45569

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:10Z
Check the source to verify that this is the current version before use.