NOT MEASUREMENT SENSITIVE


MIL-B-10955/21D
20 December 1994
SUPERSEDING
MIL-B-10955/21C
15 December 1986

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION, NAVAL AVIATOR, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-10955.

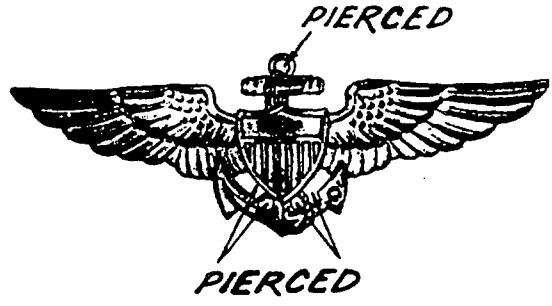

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass

FINISH: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

HEIGHT (Overall):
-2: 7/8 inch (2.22 cm) (REF)
-2: 7/16 inch (1.11 cm) (REF)

WIDTH (Overall):
-1: 2-3/4 inches (6.99 cm) (REF)
-2: 1-3/8 inches (3.49 cm) (REF)

THICKNESS (At Thickest Point of Wings):
-1: 0.090 inch ± 0.005 inch (0.229 cm ± 0.012 cm)
-2: 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart.

   Dash No. 1: 1-3/8 inches ± 1/32 inch (3.49 cm ± 0.08 cm)
   Dash No. 2: 1 inches ± 1/32 inch (2.54 cm ± 0.08 cm)

3. A mock forcer may be used to bring up the design of the shield portion of the badge only.

4. Piercing shall be as indicated.

Custodian:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activities:
Army - IH

(Project No. 8455-0788)

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:44Z
Check the source to verify that this is the current version before use.