
MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION; SENIOR ARMY AVIATOR

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-10955.

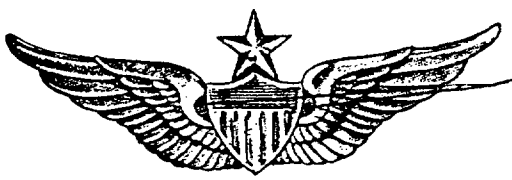

Pierced(-1,-2,-4 only)

DASH NOS.
-1: REGULAR SIZE
-2: MINIATURE SIZE
-3: DRESS MINIATURE
-4: REGULAR SIZE, SUBDUED

MATERIAL:
-1,-2,-3: RED BRASS OR NICKEL SILVER
-4: RED BRASS

DIMENSIONS (INCHES):
HEIGHT (OVERALL):
-1,-4: 27/32 (REF)
-2: 11/16 (REF)
-3: 13/32 (REF)
WIDTH (OVERALL):
-1,-4: 2-1/2 (REF)
-2: 2 (REF)
-3: 1-1/4 (REF)

THICKNESS (AT THICKEST POINT OF WINGS):
-1,-4: .110 ± .010
-2,-3: .085 ± .005

FINISH:
-1,-2,-3: NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, OXIDIZED, RELIEVED, SATIN FINISH WITH THE HIGHLIGHTS OF THE SHIELD MIRROR-LIKE POLISH
-4: DULL, FLAT BLACK ENAMEL FINISH

NOTES:
1. DASH NOS. 1,2 AND 3 MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY AND THE WEIGHTS SPECIFIED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER BADGES SHALL BE AS SPECIFIED EXCEPT THE SILVER PLATING REQUIREMENT SHALL NOT APPLY.

   WEIGHTS (MINIMUM): -1: 155 GRAINS
   -2: 95 GRAINS
   -3: 30 GRAINS

2. THE PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE EQUIDISTANT FROM THE ENDS. THE PRONGS SHALL BE 1-3/4 ± 1/32 INCHES ON CENTERS FOR DASH NOS. 1 AND 4, 1-1/2 ± 1/32 INCHES ON CENTERS FOR DASH NO. 2, AND 7/8 ± 1/32 INCH ON CENTERS FOR DASH NO. 3.

3. A MOCK FORCER MAY BE USED TO BRING UP THE DESIGN OF THE SHIELD AND STAR ONLY ON DASH NOS. 1, 2, AND 4.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455 - A283)

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:40Z
Check the source to verify that this is the current version before use.