NOT MEASUREMENT SENSITIVE


MIL-B-10955/6D
14 September 1990
SUPERSEDING
MIL-B-10955/6C
15 December 1986

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION; CHIEF ENLISTED AIRCREW MEMBER, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-10955.

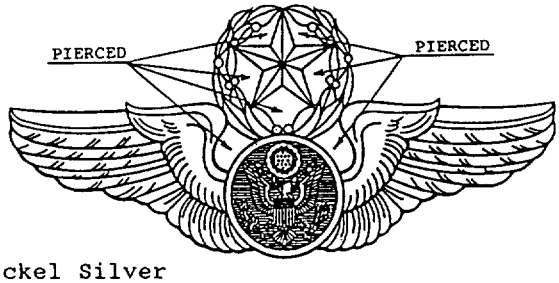

MATERIAL: Red brass or nickel Silver

DASH NO:
-1: Regular Size
-2: Miniature Size

DIMENSIONS:
HEIGHT (Overall):
-1: 1-3/8 inches (3.49 cm) (REF)
-2: 7/8 inch (2.22 cm) (REF)
WIDTH (Overall):
-1: 3 inches (7.62 cm) (REF)
-2: 2 inches (5.08 cm) (REF)
THICKNESS (Thickest point of wings):
-1: .130 inch ± .010 inch (0.330 cm ± 0.025 cm)
-2: .095 inch ± .005 inch (0.241 cm ± 0.012 cm)

FINISH: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish.

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline, equidistance from each end and the following distance apart:

   -1: 2 inches ± 1/32 inch (5.08 cm ± 0.08 cm)
   -2: 1-1/2 inches ± 1/32 inch (3.81 cm ± 0.08 cm)

2. A mock forcer may be used to bring up the design of the shield, star and ridge line of the wings only.
3. Piercing shall be as shown.
4. Badge may be nickel or rhodium plated with a mirror-like polished finish for commerical sale except the silver plating requirement shall not apply.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
DLA - CT

(Project No. 8455-0537)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:41Z
Check the source to verify that this is the current version before use.