A-A-55465A
August 12, 1994
SUPERSEDING
A-A-55465
October 1, 1993


COMMERCIAL ITEM DESCRIPTION

CONNECTORS, ELECTRICAL, POWER, SAFETY SHIELD, CLAM SHELL

The General Services Administration has authorized the use of this commercial item description (CID)

Abstract This CID covers the general requirements for connector, electrical, power, safety shield This shield can be used in applications that require crimp to discrete stranded wires, size 14 AWG through 24 AWG. Shields covered by this CID are intended for commercial/industrial applications and shall not be used in military systems needing stringent environmental and electrical requirements

Part or Identifying Number (PIN) The PIN for the CID shall be as shown in the following example

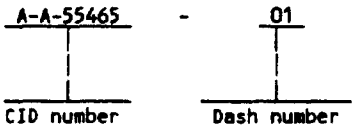

Salient characteristics

CID sheet The electrical connectors shall be in accordance with the requirements specified herein

Design, construction, and dimensions Design, construction, and dimensions shall be as specified on figure 1 and table I

Clam shell housings Clam shell housings shall be molded from a nylon material UL 94V-0 brick red for high impact and dielectric strength

Operating temperature The operating temperature range shall be from -55°C to +105°C

TABLE I Dimensions and configuration


Figure 1, configuration	Dash number A-A-55465-		Number of circuits	Wire bundle diameter range
	Style I	Style II 1/		
A	01	07	2	040 - 190 (1 02 - 5.03)mm
B	---	08	3	.040 - 190 (1 02 - 5 03)mm
C	02	09	4	.040 - 190 (1 02 - 5.03)mm
D	03	---	6	.120 - .650 (3 05 - 16 51)mm
E	04	---	9	120 - .650 (3.05 - 16 51)mm
F	05	---	12	150 - 750 (3.81 - 19 05)mm
G	06	---	15	200 - 850 (5 08 - 21 59)mm

1/ Style II does not include insert.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

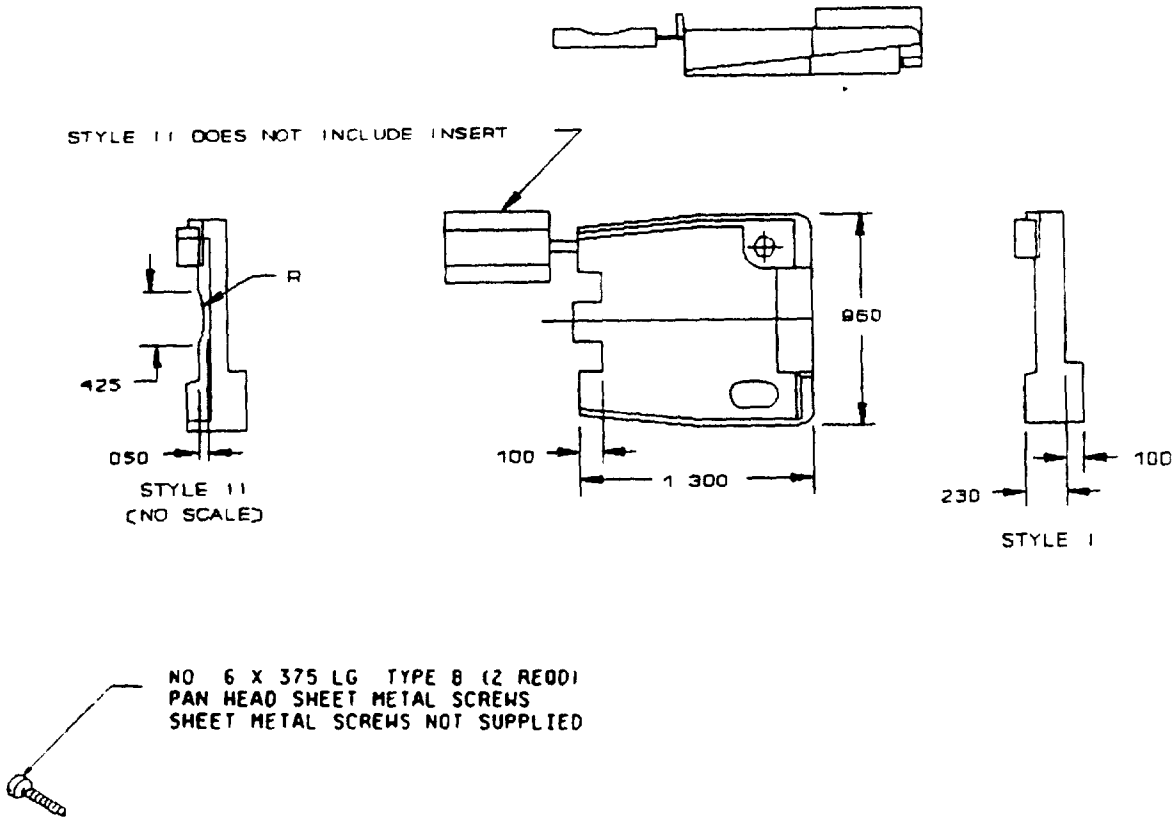


Configuration A

Figure 1 Dimensions and configurations

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:47Z
Check the source to verify that this is the current version before use.

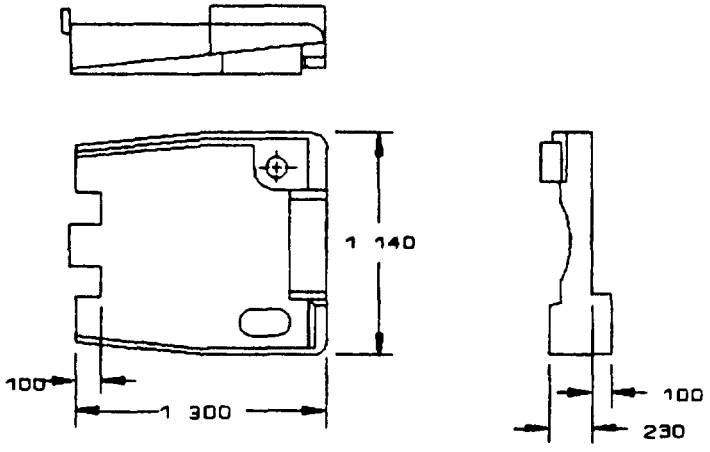

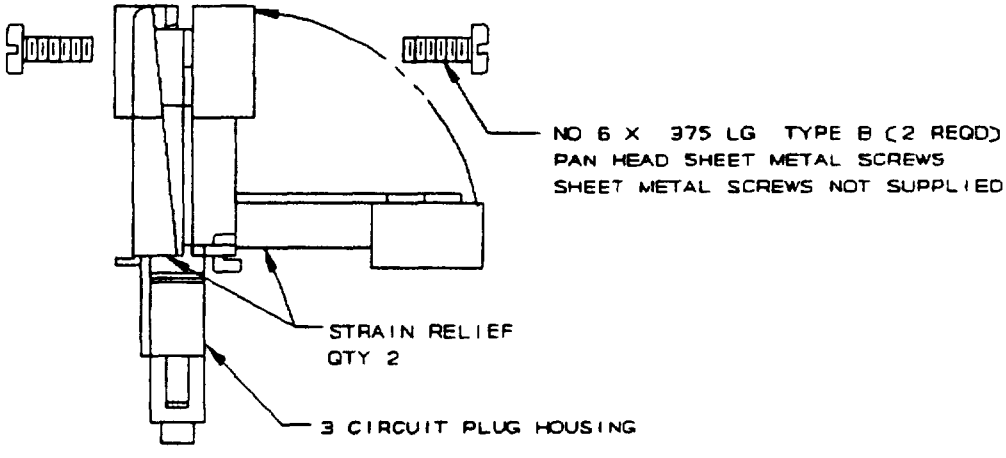



ASSEMBLY DETAILS

Configuration B

Figure 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

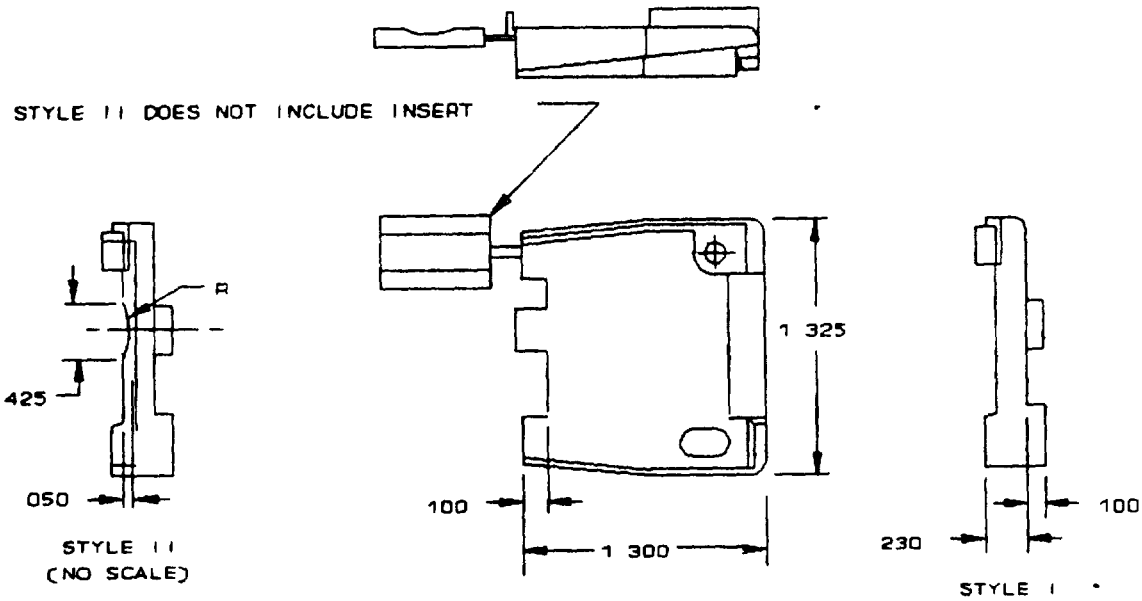


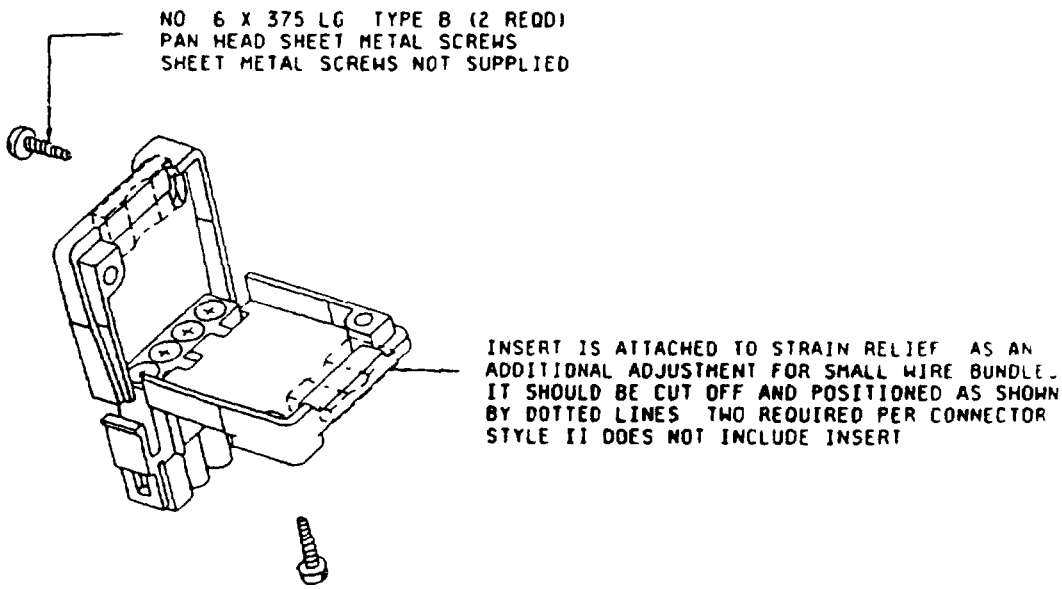

Configuration C

Figure 1 Dimensions and configurations - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

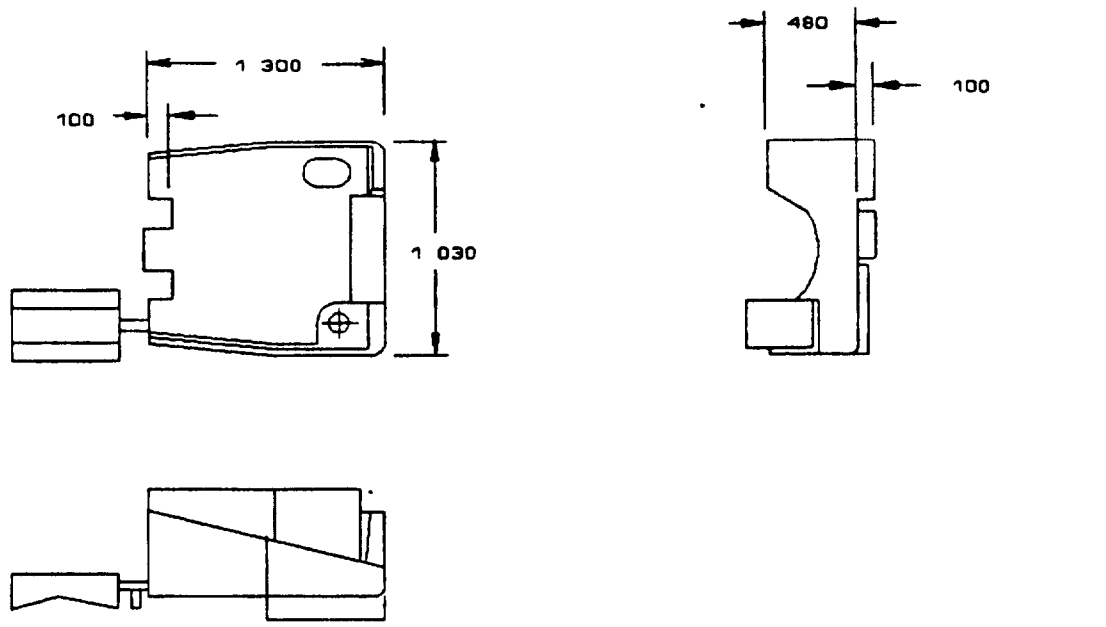


Configuration D

Figure 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

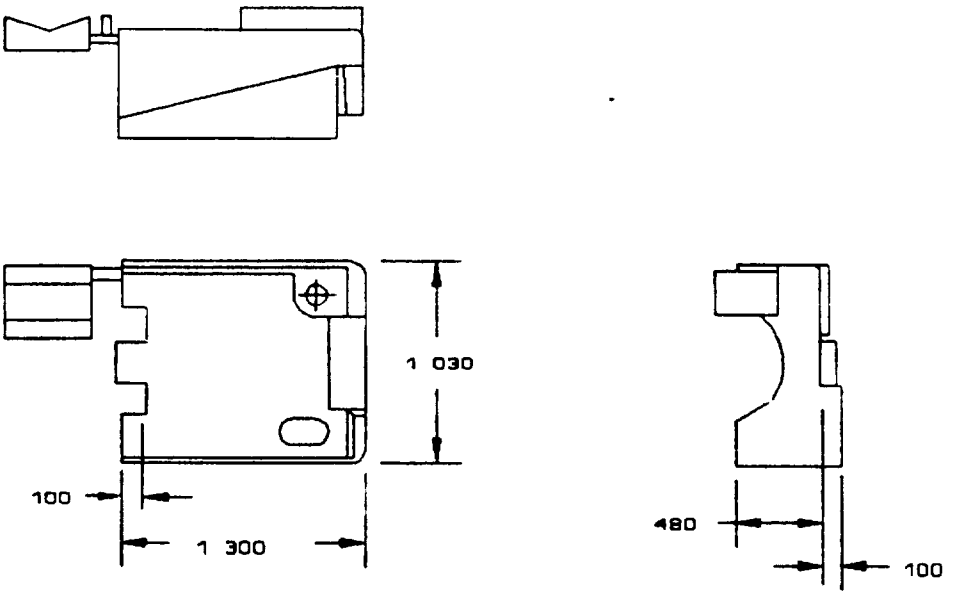


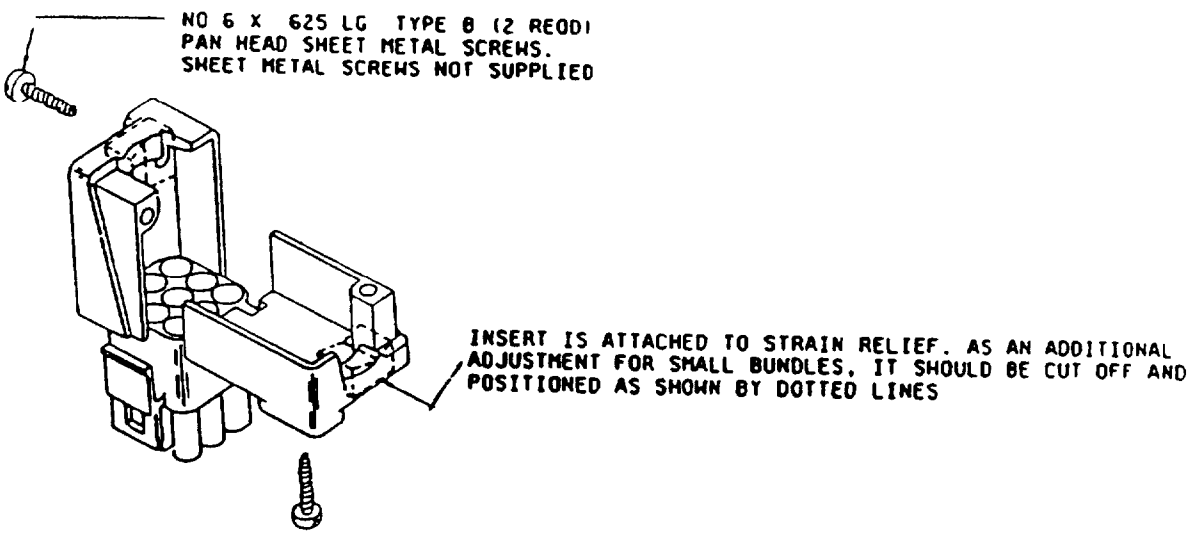


Configuration E

Figure 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:47Z
Check the source to verify that this is the current version before use.

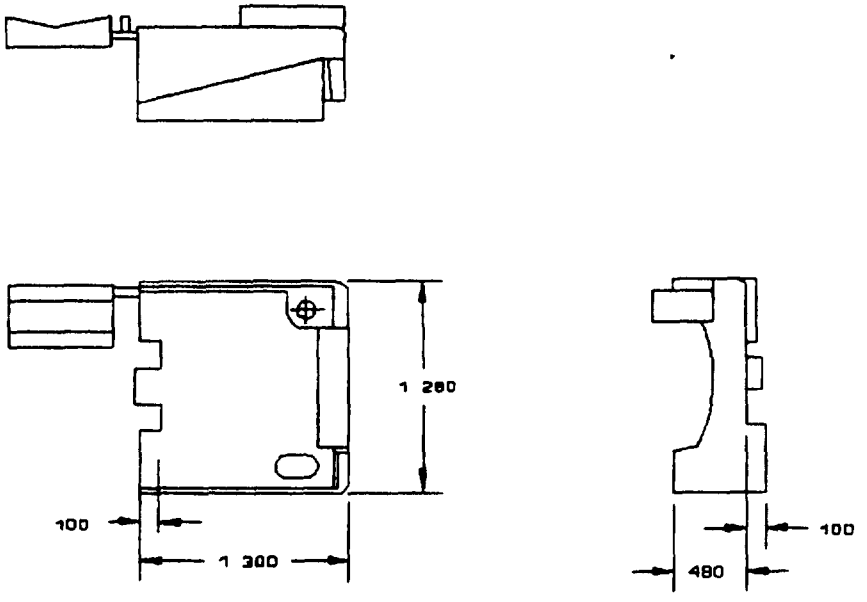


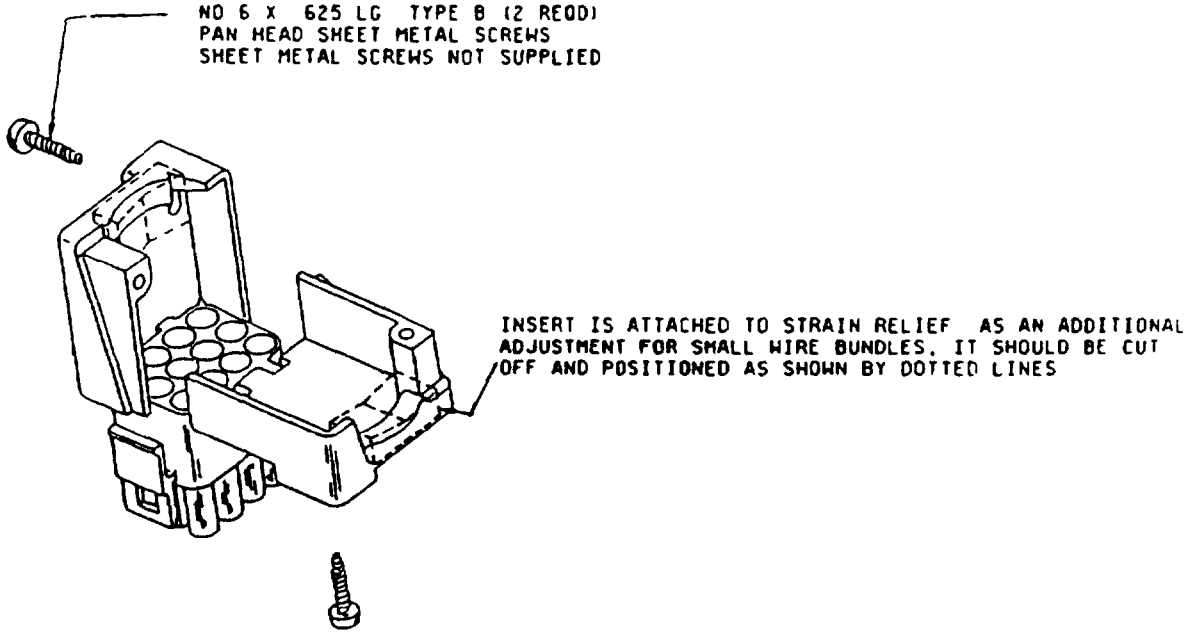


Configuration F

Figure 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

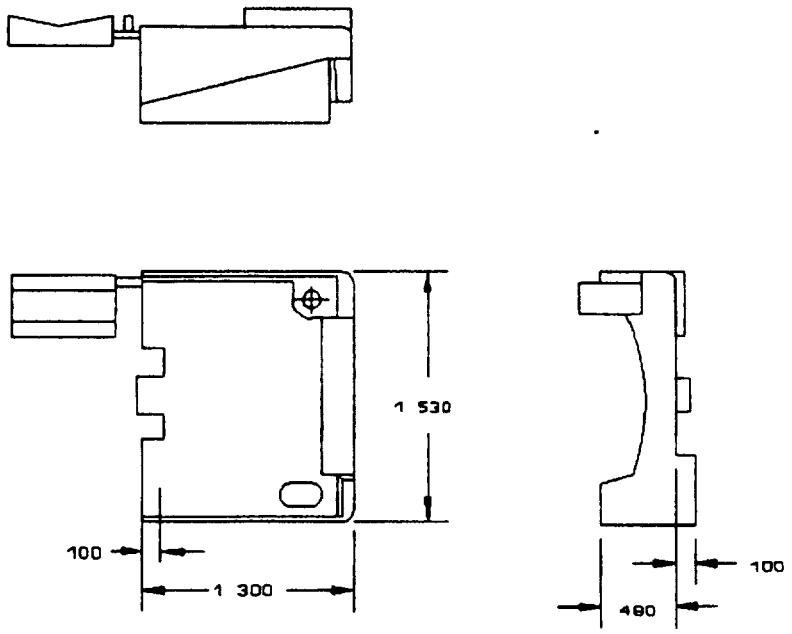

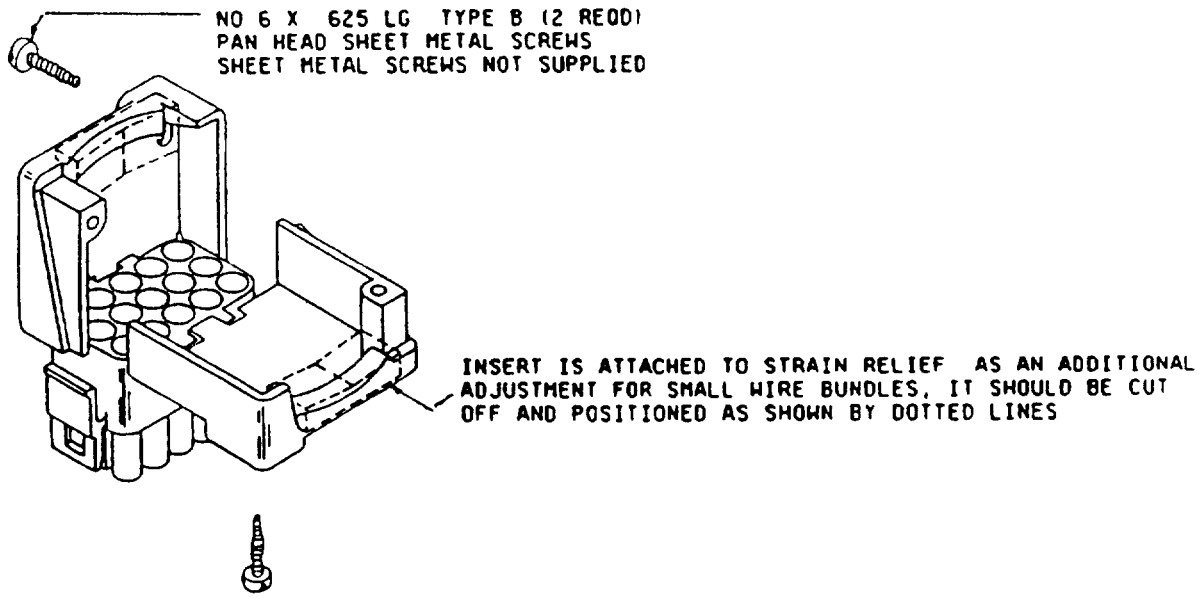

Configuration G

Figure 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

mm	Inches
1.27	.050
2.54	100
5 84	.230
9.53	375
10 80	425
12.19	.480
15.88	.625
24.38	.960
26 16	1.030
28 96	1.140
32 51	1 280
33 02	1 300
33 66	1 325
38.86	1 530

NOTES:
1. Dimensions are in inches
2. Millimeters are in parentheses
3. Unless otherwise specified tolerances shall be ± 015 inch (0 38 mm)
4. This item was designed using inch-pound units of measurement In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.
5. The insert is attached to the strain relief and is used to provide additional adjustment for small wire bundles or it is discarded
6. Pictorial representations are for reference purposes only
7. Two pan head sheet metal screws are required for assembly, no 6 x 375 long, not supplied
8. Detachable insert may separate from strain relief body during shipping
9. Two strain reliefs are required per connector

Figure 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

Regulatory requirements This section is not applicable to this CID

Quality assurance provisions

Responsibility for inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Contractor certification statement The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract

Certificate of compliance. A certificate of compliance must be supplied with all parts supplied to this ID

Packaging

Preservation, packaging, packing, labeling, and marking Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order.

Notes This section contains relevant information which is useful to buyers, users and suppliers in the process of procuring the item, but is not mandatory

Ordering data (see table II) Acquisition documents should specify the following

a. CID document number and revision and CID PIN

b Quality assurance provisions

c Packaging requirements

d. Color (if applicable)

Comments Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN DESC-ELDI, Dayton, OH 45444-5270, or telephone (513) 296-5391

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:47Z
Check the source to verify that this is the current version before use.

Sources of supply. A suggested source of supply is listed in table II. Additional sources will be added as they become available

TABLE II Ordering data

Suggested sources of supply				
CID PIN A-A-55465- 1/	Vendor commercial PIN	CID PIN A-A-55465- 1/	Vendor commercial PIN	Vendor CAGE number
Style I		Style II (no insert)		
01	640713-1	07	640713-2	00779
--	---	08	641945-1	00779
02	641776-1	09	641776-2	00779
03	640715-1	---	---	00779
04	640716-1	---	---	00779
05	640717-1	---	---	00779
06	640718-1	---	---	00779

1/ Two PIN's are required for one connector

Vendor CAGE number	Vendor name and address
00779	AMP, Incorporated P O Box 3608 Harrisburg, PA 17105-3608

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

(Project 5935-D522)

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:47Z
Check the source to verify that this is the current version before use.