
COMMERCIAL ITEM DESCRIPTION

CONNECTORS, ELECTRICAL, POWER, CRIMP TO WIRE, SPLIT PIN

The General Services Administration has authorized the use of this commercial item description (CID)

Abstract This commercial item description (CID) covers the general requirements for connector, electrical, power, crimp to wire, split pin This pin can be used in applications that require crimp to discrete stranded wires, size 14 AWG through 24 AWG Pins covered by this CID are intended for commercial/industrial applications and shall not be used in military systems needing stringent environmental and electrical requirements

Part or Identifying Number (PIN) The PIN for the CID shall be as shown in the following example

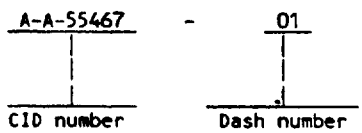

Salient characteristics

CID sheet The electrical connectors shall be in accordance with the requirements specified herein

Design, construction, and dimensions Design, construction, and dimensions shall be as specified on figure 1

Operating temperature The operating temperature range shall be from -55°C to +105°C

Contact material. The contact material shall be brass or phosphor bronze

Plating Plating shall be pre-tin or .76 microns (30 microinches) minimum localized gold in contact area, over 1 27 microns (50 microinches) minimum of nickel

Mating force Connector mating force shall not exceed 6 67 newtons (1 5 pounds)

Unmating force Connector unmating force shall not exceed 2.22 newtons (0.5 pound) minimum

Contact insertion. Contact insertion force shall be 8 90 newtons (2 pounds) maximum per contact

Contact retention. Contact retention force shall be 66.72 newtons (15 pounds) minimum

Crimp tensile strength The crimp tensile strength of the wire-to-contact termination shall not be less than the value specified in table I when tested at a cross-head parting speed of 25.4 millimeters (1 inch) per minute, maximum


Table I. Crimp tensile strength

Wire Size (AWG)	Tensile strength kilograms (pounds)
24	3 63 (8)
22	6 35 (14)
20	6 35 (14)
18	13.61 (30)
16	20.41 (45)
14	22 68 (50)


AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

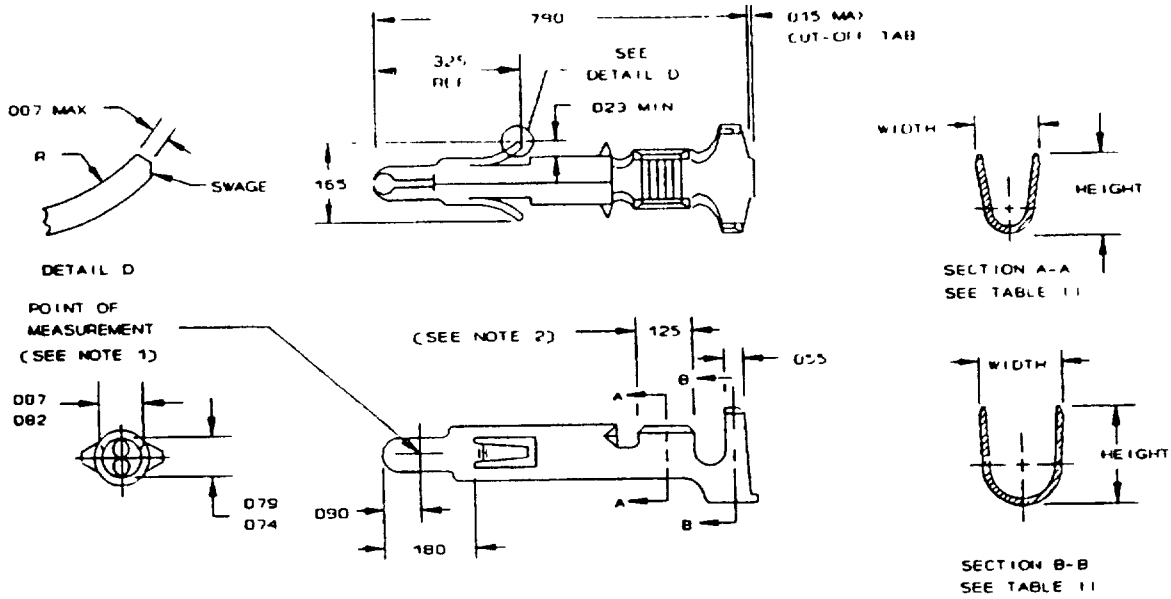


Loose piece (24-18 AWG)
Configuration A

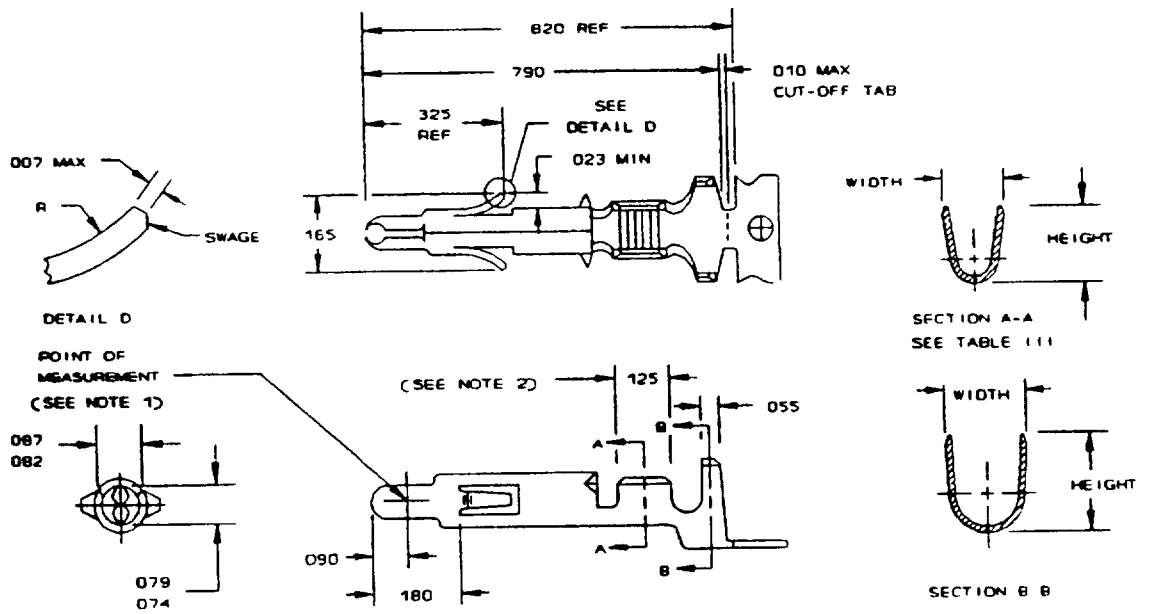


Strip (24-18 AWG)
Configuration B

Figure 1. Dimensions and configurations

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

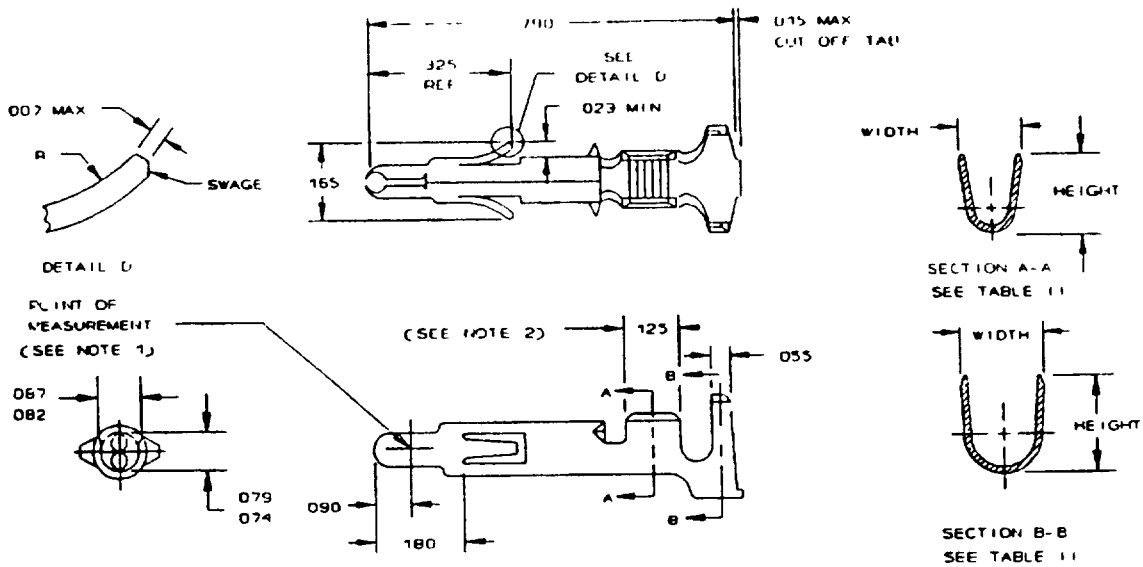

Loose piece (20-14 AWG)
Configuration C

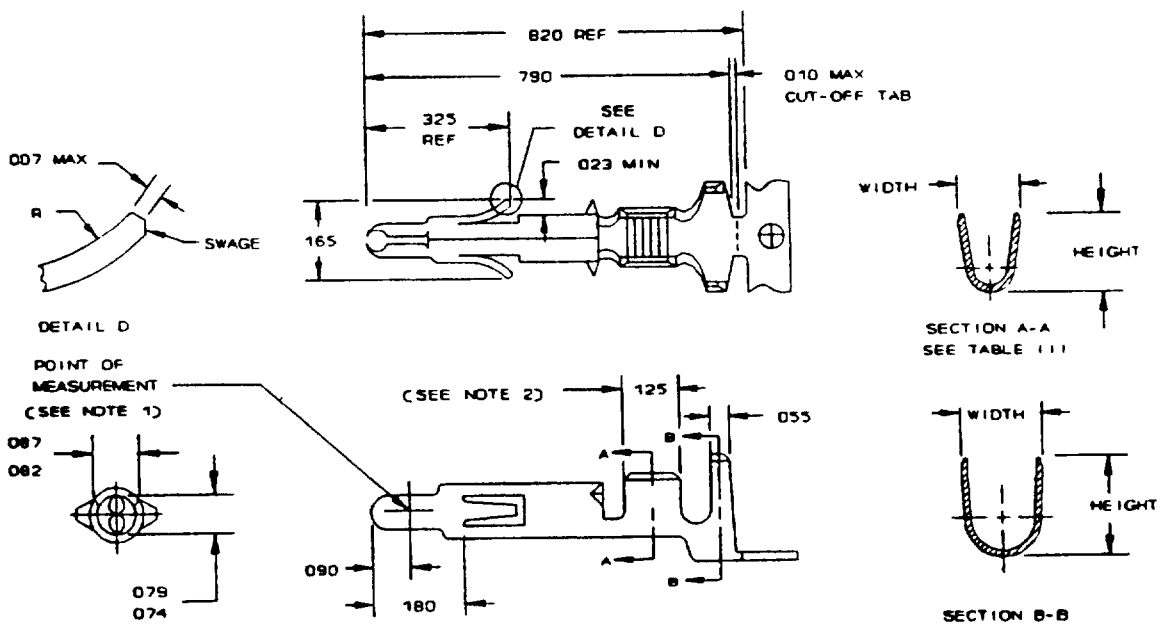

Strip (20-14 AWG)
Configuration D

Figure 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

mm	Inches
0 18	007
0 25	010
0 38	.015
0 58	.023
1 40	055
1 88	074
2 01	079
2 08	082
2 21	087
2 29	090
3 18	125
4 57	180
8.26	.325
20 07	790
20 83	820

NOTES

1. Plated with 30 microinches (76 microns) of gold, over 50 microinches (1 27 microns) of nickel underplate
2. Plated with 30 microinches (76 microns) of gold, over 50 microinches (1 27 microns) of nickel underplate
3. Unless otherwise specified tolerances shall be ± 015 inch (0 38 millimeters)
4. Dimensions are in inches
5. Millimeters are in parentheses
6. This item was designed using inch-pound units of measurement In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule

Figure 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:47Z
Check the source to verify that this is the current version before use.

Table II Split pin - loose piece

CID dash number	Wire gage	figure number 1, configuration	Insulation range diameter	Wire barrel height A-A width height	Insulation barrel Height B-B width height
A-A-55467-01	24-18	A	040- 100	110/ 085 105/ 080	145/ 120 150/ 125
A-A-55467-02	24-18	A	040- 100	110/ 085 105/ 080	145/ 120 150/ 125
A-A-55467-03	24-18	A	040- 100	110/ 085 105/ 080	145/ 120. 150/ 125
A-A-55467-04	20-14	C	060- 130	130/ 105 145/ 120	170/ 145 190/ 165
A-A-55467-05	20-14	C	060- 130	130/ 105 145/ 120	170/ 145 190/ 165
A-A-55467-06	20-14	C	060- 130	130/ 105 145/.120	170/ 145: 190/ 165
A-A-55467-07	20-14	C	130- 200	130/.105 145/ 120	240/ 215 240/ 215
A-A-55467-08	20-14	C	130- 200	130/ 105 145/ 120	240/ 215· 240/ 215
A-A-55467-09	20-14	C	130- 200	130/ 105 .145/ 120	240/ 215 240/ 215

Table III Split pin - strip

CID dash number	Wire gage	figure number 1, configuration	Insulation range diameter	Wire barrel height A-A width height	Insulation barrel Height B-B width height
A-A-55467-10	24-18	B	040- 100	105/ 090 100/ 085	140/ 125 145/ 130
A-A-55467-11	24-18	B	.040- 100	.105/ 090..100/ 085	.140/ 125· 145/.130
A-A-55467-12	24-18	B	.040- 100	105/.090 100/ 085	140/ 125..145/ 130
A-A-55467-13	24-18	B	040- 100	105/ 090 100/ 085	140/ 125 145/ 130
A-A-55467-14	20-14	D	060- 130	130/ 105 145/ 120	170/ 125 190/ 165
A-A-55467-15	20-14	D	.060- 130	130/ 105..145/ 120	170/ 125..190/ 165
A-A-55467-16	20-14	D	060- 130	130/ 105 145/.120	170/ 125 190/.165
A-A-55467-17	20-14	D	.060- 130	130/ 105. 145/ 120	.170/ 125..190/ 165
A-A-55467-18	20-14	D	130- 200	130/ 105 145/ 120	.240/ 215 240/ 215
A-A-55467-19	20-14	D	130- 200	130/ 105 145/ 120	240/ 215 240/ 215
A-A-55467-20	20-14	D	130- 200	130/ 105 145/ 120	240/ 215 240/ 215
A-A-55467-21	20-14	D	130- 200	130/ 105 145/ 120	240/ 215 240/ 215

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:47Z
Check the source to verify that this is the currentversion before use.

Dielectric withstanding voltage There shall be no breakdown of the insulating material when subjected to 5000 V ac for 1 minute between adjacent contacts of the mated connector assemblies

Vibration The connector, or hardware when assembled to the connector, shall exhibit no evidence of breaking, cracking, or loosening of parts when subjected to vibration of 10-55-10 Hz traversed in 1 minute at 1 52 millimeters (06 inch) total excursion for 2 hours in each of three mutually perpendicular planes The contacts shall evidence no discontinuity greater than 10 microseconds and termination resistance, dry circuit not to exceed 5 0 milliohms

Physical shock The connector, or hardware when assembled to the connector, shall be subjected to 50 G's at 10 milliseconds, 3 shocks in each direction applied along the three mutually perpendicular planes, total 18 shocks The contacts shall evidence no discontinuity greater than 10 microseconds and the termination resistance, dry circuit not to exceed 6 0 milliohms

Thermal shock The connector, when mated, shall be subjected to 25 cycles between -55°C and +85°C, dielectric withstanding voltage, 3 75 milliohms maximum termination resistance, dry circuit

Temperature-humidity cycling The connector, when mated, shall be subjected to temperature-humidity cycling between +25°C and +65°C at 95 percent RH, with cold shock at -10°C during any 5 of the first 9 cycles

Durability Durability shall consist of 50 cycles of mating and unmating and upon completion the termination resistance, dry circuit shall not exceed 3 6 milliohms There shall be no indication of physical damage

Corrosion Corrosion shall be 48 hours at 5 percent salt concentration After exposure of the mated and unmated connectors, the termination resistance, dry circuit will not exceed 7 0 milliohms

Loose piece and strip form ordering data Loose piece and strip form ordering data shall be as specified in tables III and IV

Regulatory requirements This section is not applicable to this CID

Quality assurance provisions

Responsibility for inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements

Contractor certification statement The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurances practices, and is the same as the product provided as a bid sample The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract

Certificate of compliance A certificate of compliance shall accompany all parts supplied to this CID

Packaging

Preservation, packaging, packing, labeling, and marking Preservation, packaging, labeling, and marking shall be as specified in the contract or purchase order

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

Notes This section contains relevant information which is useful to buyers, users and suppliers in the process of procuring the item, but is not mandatory

Ordering data Acquisition documents should specify the following

a CID document number and revision and CID PIN

b Quality assurance provisions

c Packaging requirements

d Color (if applicable)

Comments Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN DESC-ELDI Dayton, OH 45444-5270, or telephone (513) 296-5391

Sources of supply A suggested source of supply is listed in table IV Additional sources will be added as they become available

TABLE IV Split pin loose piece ordering data

Split pin loose piece ordering data							
CID dash number	Vendor commercial PIN	Figure number 1, configuration	Wire gauge	Base material	Overplate	Under-plate	Vendor CAGE Number
A-A-55467-01	350706-1	A	24-18	Brass	Pre-tin	---	00779
A-A-55467-02	350706-2	A	24-18	Brass	Gold 1/	Nickel	00779
A-A-55467-03	350706-7	A	24-18	Brass	Gold 2/	Nickel	00779
A-A-55467-04	350705-1	C	20-14	Brass	Pre-tin	---	00779
A-A-55467-05	350705-2	C	20-14	Brass	Gold 1/	Nickel	00779
A-A-55467-06	350705-7	C	20-14	Brass	Gold 2/	Nickel	00779
A-A-55467-07	350707-1	C	20-14	Brass	Pre-tin	---	00779
A-A-55467-08	350707-2	C	20-14	Brass	Gold 1/	Nickel	00779
A-A-55467-09	350707-7	C	20-14	Brass	Gold 2/	Nickel	00779

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

Table IV Suggested sources of supply - continued

Split pin strip form ordering data							
CID dash number	Vendor commercial PIN	Figure number 1, configuration	Wire gauge	Base material	overplate	Under-plate	Vendor CAGE Number
A-A-55467-10	350699-1	B	24-18	Brass	Pre-tin	---	00779
A-A-55467-11	350699-2	B	24-18	Brass	Gold 1/	Nickel	00779
A-A-55467-12	350699-3	B	24-18	Ph Br	Pre-tin	---	00779
A-A-55467-13	350699-7	B	24-18	Brass	Gold 2/	Nickel	00779
A-A-55467-14	350687-1	D	20-14	Brass	Pre-tin	---	00779
A-A-55467-15	350687-2	D	20-14	Brass	Gold 1/	Nickel	00779
A-A-55467-16	350687-3	D	20-14	Ph Br	Pre-tin	---	00779
A-A-55467-17	350687-7	D	20-14	Brass	Gold 2/	Nickel	00779
A-A-55467-18	350700-1	D	20-14	Brass	Pre-tin	---	00779
A-A-55467-19	350700-2	D	20-14	Brass	Gold 1/	Nickel	00779
A-A-55467-20	350700-3	D	20-14	Ph Br	Pre-tin	---	00779
A-A-55467-21	350700-7	D	20-14	Brass	Gold 2/	Nickel	00779

1/ Plated with 30 microinches (76 microns) minimum of gold in mating area and inside wire barrel over 50 microinches (1 27 microns) minimum nickel underplate on entire contact

2/ Gold plated with 30 microinches (76 microns) minimum in mating area over 50 microinches (1 27 microns) minimum nickel underplate on entire contact

Vendor CAGE number	Vendor name and address
00779	AMP, Incorporated P O Box 3608 Harrisburg, PA 17105-3608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

Supersession data Supersession data shall be as specified in table V

TABLE V Supersession data

Superseded (old) PIN 87100-	Superseding (new) PIN A-A-55467-	Superseded (old) PIN 87100-	Superseding (new) PIN A-A-55467-
021	01	N/A	12
N/A	02	012	13
024	03	001	14
013	04	N/A	15
N/A	05	N/A	16
016	06	004	17
N/A	07	N/A	18
N/A	08	N/A	19
N/A	09	N/A	20
009	10	N/A	21
N/A	11		

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

(Project 5935-0524)

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:47Z
Check the source to verify that this is the current version before use.