[INCH-POUND]
A-A-55472E
3 May 2017
SUPERSEDING
A-A-55472D
9 May 2012

COMMERCIAL ITEM DESCRIPTION

FUSE, PLUG, (TYPE S), TIME DELAY, TYPE S BASE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for a time delay, type S base fuse plug. Fuse plugs covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the PIN as shown in the following example (see 7.1).

AA55472 - 01

AA55472: CID PIN

01: Dash number (see table I)

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuse plugs supplied to this CID shall be as specified herein and shall meet the requirements of UL 248-11 for fuse plugs (see figure 1).

3.2. Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 125 V ac maximum.

3.4 Interrupt rating. The interrupt rating shall be 10,000 amperes rms at 125 volts.

3.5 Fuse plug base (screw shell). The screw shell shall be of the type S base size in accordance with UL 248-11.


3.6 Marking. Fuse plugs supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN and the UL 248-11 listing mark. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

Comments, suggestions, or questions on this document should be addressed to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990 or e-mailed to:CircuitProtect@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

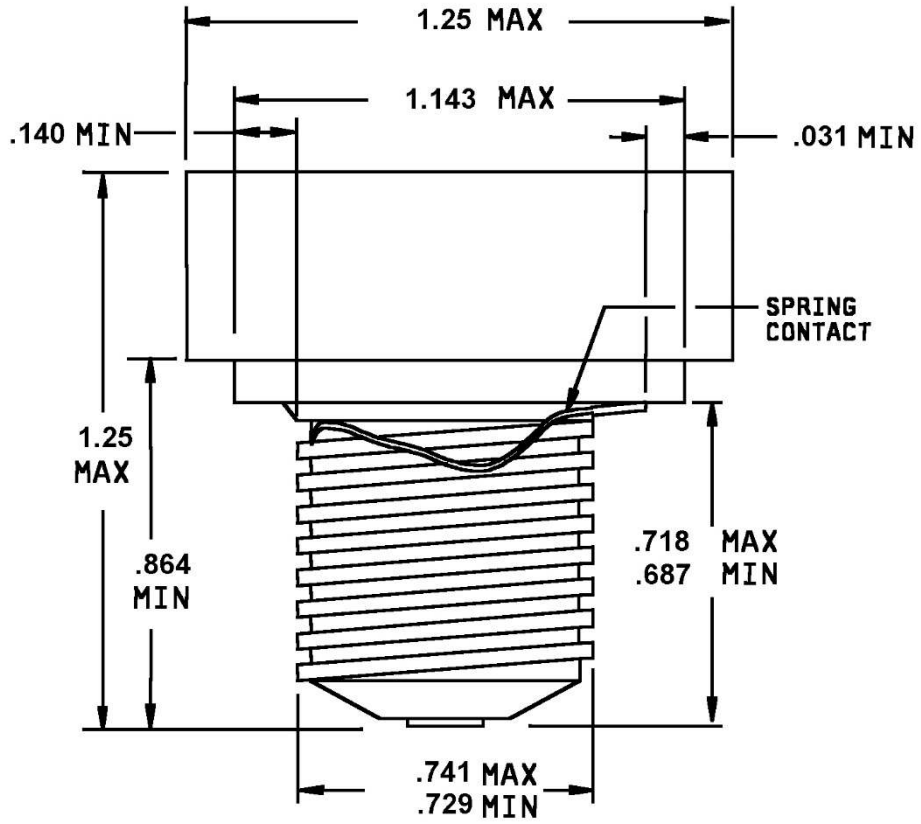

Inches	mm	Inches	mm
.031	0.8	.741	18.82
.140	3.6	.864	21.95
.687	17.5	1.143	29.03
.718	18.3	1.25	31.80
.729	18.52		

NOTES:

1. Dimensions are in inches.
2. Tolerance is ±.005 inch (0.13 mm), unless otherwise specified.
3. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

CID PIN AA55472-	Ampere rating	CID PIN AA55472-	Ampere rating
01	.3	19	3.5
02	.4	20	4
03	.5	21	4.5
04	.6	22	5
05	.8	23	5.6
06	1	24	6
07	1.125	25	6.25
08	1.25	26	7
09	1.4	27	8
10	1.6	28	9
11	1.8	29	10
12	2	30	12
13	2.25	31	14
14	2.5	32	15
15	2.8	33	20
16	3	34	25
17	3.2	35	30
18	3.25		

3.7 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.8 Workmanship. Fuseholders shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company producing the item must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuse plugs to DLA Land and Maritime under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

Federal Regulations

FEDERAL ACQUISITION REGULATION (FAR)

FAR - Federal Acquisition Regulations (FAR).

(Copies of this document are available online at https://www.acquisition.gov/comp/far/index.html or from the U.S. Government Printing Office, 732 N. Capital Street, NW, Washington D.C. 20401-0001.)

Other Publications

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 248-11 - Low-Voltage Fuses - Part 11: Plug Fuses, Standard for Safety.

(Copies of this document are available online at http://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict acquisition to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
71400	Cooper Bussmann, Incorporated 114 Old State Rd Ellisville, MO 63021-5915 Phone number (636) 394-2877 Facsimile number (855) 287-7626 E-mail: mailto:busscustsat@eaton.com Uniform Resource Locator (URL): http://www.eaton.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

7.6 Part number (P/N) supersession data. These CID PINs supersedes the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE III. P/N supersession data.

CID dash number AA55472-	MFR's CAGE 71400 MFR's P/N 1/	CID dash number AA55472-	MFR's CAGE 71400 MFR's P/N 1/
01	S 3/10	19	S 3-1/2
02	S 4/10	20	S 4
03	S 1/2	21	S 4-1/2
04	S 6/10	22	S 5
05	S 8/10	23	S 5-6/10
06	S 1	24	S 6
07	S 1-1/8	25	S 6-1/4
08	S 1-1/4	26	S 7
09	S 1-4/10	27	S 8
10	S 1-6/10	28	S 9
11	S 1-8/10	29	S 10
12	S 2	30	S 12
13	S 2-1/4	31	S 14
14	S 2-1/2	32	S 15
15	S 2-8/10	33	S 20
16	S 3	34	S 25
17	S 3-2/10	35	S 30
18	S 3-1/4		

1/ The manufacturer's P/N shall not be used for acquisition to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements, see 3.6.

7.7 Government users. To acquire information on obtaining these fuse plugs from the Government inventory system, contact DLA Land and Maritime, ATTN: DLA Land and Maritime-FMX, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-3677.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

7.7.1 National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID. The list is for information only and may not be indicative of all possible NSN's associated with the CID. For up to date information on assigned NSN's, please contact the aforementioned DLA Land and Maritime office (See 7.7).

TABLE IV. NSN's.

Dash number (see table I) AA55472-	NSN	Dash number (see table I) AA55472-	NSN
01	N/A	19	N/A
02	N/A	20	5920-00-228-4457
03	N/A	21	N/A
04	N/A	22	5920-00-552-1554
05	N/A	23	5920-00-280-9312
06	5920-00-552-8573	24	N/A
07	N/A	25	5920-00-552-1555
08	N/A	26	N/A
09	5920-01-260-8502	27	N/A
10	5920-00-552-8558	28	5920-01-260-8500
11	N/A	29	5920-00-552-8571
12	5920-00-552-8559	30	5920-00-564-3548
13	5920-01-260-8501	31	N/A
14	N/A	32	5920-00-131-9972
15	N/A	33	5920-00-131-9973
16	N/A	34	5920-00-503-2965
17	5920-00-552-8569	35	5920-00-552-8567
18	N/A		

7.8 Changes from previous issue. The margins of this CID are marked with vertical line to indicate modifications generated by this revision. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:

DLA-CC

Project 5920-2017-016

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.